



Fase¹™ + Function.

BY EUROFASE





Fase¹™

— BY EUROFASE —

Modern, edgy, architectural. Our extensive Fase1 collection encompasses recessed lighting, surface mounts, architectural profiles, and systems to dress your space and illuminate it with a precise practicality. With endless customizable options, each job is tailor made to suit your specifications and technological needs. Let's begin your next FASE of functional lighting today!





C O N T E N T S

Fase¹_{TM}

Thumbnail Index	VI
TANGO	1
BRAVO	31
OSCAR	67
WHISKEY	89
SUBTRACKT	111
FOCUS	121
CHARLIE	133
CONSTRUCT	145
MAST	175
ROUTE	193
MUCCI	217
ARCHITECTURAL PROFILES	235
Index	273

Function.

Thumbnail Index	V
RECESSED MULTIPLES & DOWNLIGHTS	1
RECESSED	143
TRACK LIGHTING	181
MINI PROFILES	217
CEILING MOUNT	237
VANITY & SCONCE	257
LED MIRRORS	277
EXTERIOR LIGHTING	311
Index	369

2" TANGO LED RECESSED



FIXED DOWNLIGHT
5



GIMBAL
7



SPOT
9



SUSPENSION
11



PULL DOWN
13

2" BRAVO LED RECESSED + SURFACE MOUNT



FIXED APERTURE
35



GIMBAL
36



SNOOT GIMBAL
39



SUSPENSION
41



SPOT
43



WALL WASH
45




PANEL
47


3"/4"/5" OSCAR LED COMMERCIAL RECESSED



FIXED
71



GIMBAL
73

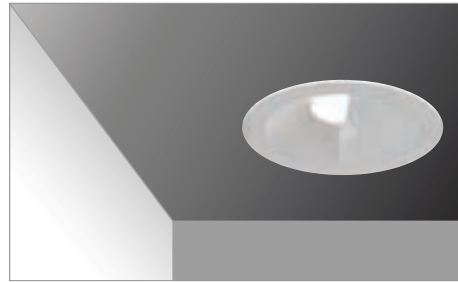

WALL WASH
75

2.5"/4.5" WHISKEY LED CYLINDERS



SURFACE MOUNT
95



SUSPENSION
97




WALL MOUNT
99

SUBTRACKT 120V ABOVE CEILING LED TRACK SYSTEM



SUBTRACKT CHANNELS
113



H-STYLE TRACKS
113



15W LED LIGHT HEAD
115



30W LED LIGHT HEAD
116

FOCUS / CHARLIE CLASSIC LED TRACK LIGHTING



TRACK LIGHTING ACCESSORIES
143 - 144



FOCUS 14W
LED TRACK HEAD
125



FOCUS 29W
LED TRACK HEAD
127



CHARLIE 7W
LED TRACK HEAD
135




CHARLIE 15W
LED TRACK HEAD
137



CHARLIE 30W
LED TRACK HEAD
139

CONSTRUCT 24V DC LED MODULAR TRACK SYSTEM

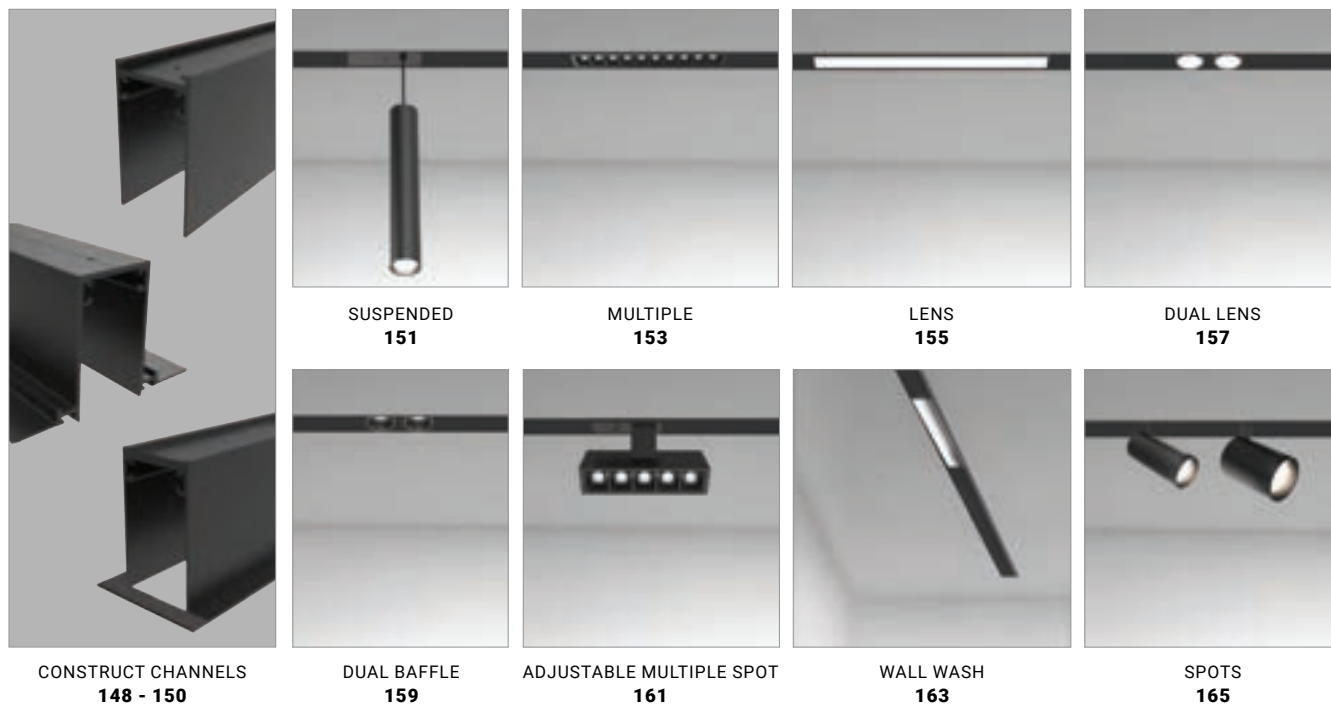

MAST 24V DC LED MODULAR TRACK SYSTEM



ROUTE 120V MODULAR LED TRACK SYSTEM



ROUTE CHANNELS
197 - 198



SPOTS
199



DOWNLIGHT
201



MULTIPLES
203



LENS
205

MUCCI CUSTOMIZABLE LED CHANDELIERS




60" INWARD ROUND
222



48" INWARD ROUND
222



32" INWARD ROUND
222



60" INWARD RECTANGULAR
223



60" OUTWARD ROUND
227



48" OUTWARD ROUND
227



32" OUTWARD ROUND
227



10W LED GLOW BAR
229



6W LED GLOW BAR
229



13W LED ADJUSTABLE
SPOT LIGHT
229




8W LED ADJUSTABLE
SPOT LIGHT
229



10W LED FIXED
DOWNLIGHT
229

ARCHITECTURAL PROFILES SURFACE MOUNT / SUSPENSION / WALL MOUNT / RECESSED

F38 SERIES 1.5"				
	DIRECT/INDIRECT WALL MOUNT 243	DIRECT/INDIRECT SUSPENSION 244	STANDARD SUSPENSION 245	RECESSED 246
				
	STANDARD SURFACE MOUNT 249	STANDARD SUSPENSION 250	REGRESSED ARCH SUSPENSION 251	DIRECT/INDIRECT SUSPENSION 253
F50 SERIES 2.0"				
	DIRECT/INDIRECT WALL MOUNT 254	RECESSED 255	ROUND SUSPENSION 256	
F75 SERIES 3.0"				
	STANDARD SUSPENSION 259	STANDARD SURFACE MOUNT 260	RECESSED 261	
F100 SERIES 4.0"				
	STANDARD SUSPENSION 265	STANDARD SURFACE MOUNT 266	ROUND SUSPENSION 267	

COMFORT & STYLE

Let's welcome the great outdoors! We are a community of people who long to spend time outside, relaxing in nature, and breathing in fresh air. As we gravitate towards spending quality time outdoors, we have carefully curated and constructed an assortment of outdoor heaters to lengthen that time.

Introducing Innova heaters, purposeful products that will add more value to your space and expand your range outdoors. For smooth integration and a harmonious design, we have also further expanded some of our outdoor collections to incorporate matching outdoor heaters. Design your perfect space with Innova Heating Co. by Eurofase and let us heat things up. Visit innovaheatingco.com for more information.

innova

MATCHING OUTDOOR
HEATER AVAILABLE

KEEP AN EYE OUT
FOR THIS ICON FOR
MATCHING HEATERS



*innova*TM
HEATING CO.

InnovaHeatingCo.com

Where Comfort Meets Style.

At Innova Heating Co., we choose *infrared!*

Unlike other supplemental heating appliances, infrared heaters do not heat the air. Instead they emit a clean, safe wavelength of light that only warms the objects the wavelength touches. The physics involved is similar to the way sunlight warms objects, meaning there is a natural sensation of being warmed off the heat of an Innova heater. For this reason, heat produced by infrared is evenly distributed, without interference from surrounding elements such as drafty or windy conditions.



AVAILABLE SIZES*

39" and 61" lengths



AVAILABLE WATTAGES*

4000W, 5000W, 6000W




COMPATIBLE VOLTAGES

208V, 240V, 277V, 480V

COLOR OPTIONS

● Stainless Steel ● Black ○ White ● Custom Color

DÉCOR PLATE OPTIONS

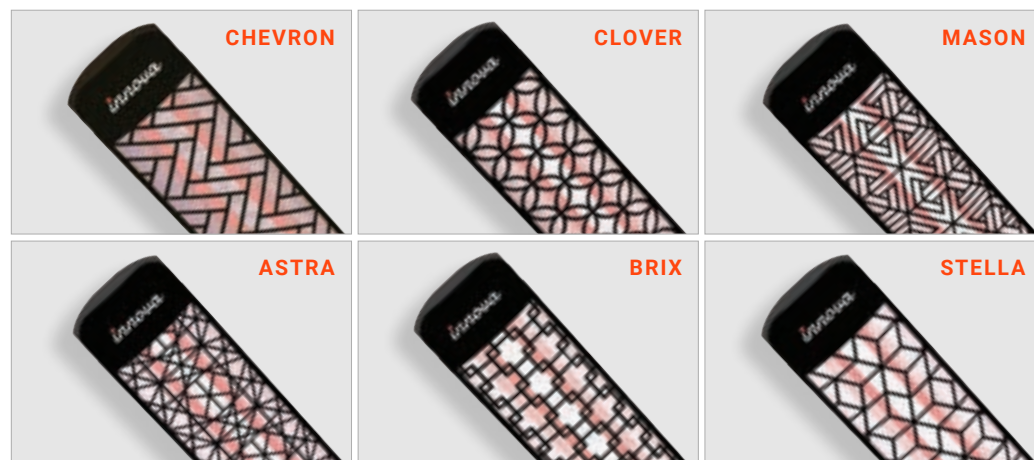

FEATURES



Instant Heat



No Greenhouse
Gases



Silent Operation



Indoor / Outdoor



No Ventilation
Required



Low Maintenance



We do *custom*

At Innova Heating Co., we aim to provide you with purposeful products that will add more value to your space, expanding your range outdoors.

We not only want to provide you with a heater that fits in your space, but we also want to make sure it belongs there. Innova's team can help you customize the heater décor plates with our metal laser cutting capabilities that can produce special shapes and lettering to spark your unique style.

Innova Heating Co. takes pride in our designs and designs with passion, providing our customers with exactly what they need.

Get in touch with one of our dealers to get your Innova Heater customized.



It's up to *hue!*


Our customization abilities do not end at metal laser cutting of décor plates. With our resources, we can accommodate a large assortment of custom colors to visually enhance your space based on your needs.

From the design concept to product engineering, Innova Heating can manufacture and produce your custom design. Get in touch with one of our dealers to get your Innova Heater customized.



AAMA 2603
5 Years Southern
Florida Sun Rating.

Powder Coat finishes are extremely durable for exterior coating protection.

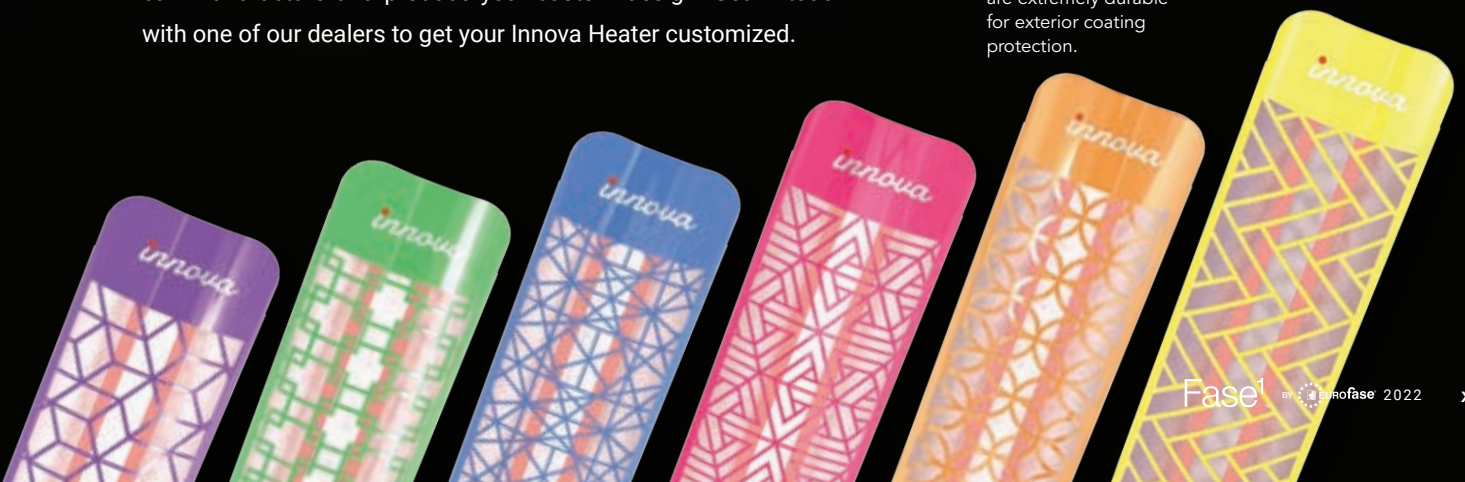


TANGO

Tango is a specification grade LED recessed family, offering multiple options for design and functionality. It offers round and square, trim and trimless, 1-, 2-, and 3-light options, along with several task specific trim designs. The Tango family features 90+ CRI high performance LED chips, drivers with multi dimming capabilities, and supports industry leading ease of installation and services.

The sleek and contemporary design of the Tango family will illuminate your space with precision and style. Let's tango.



LUMINAIRES

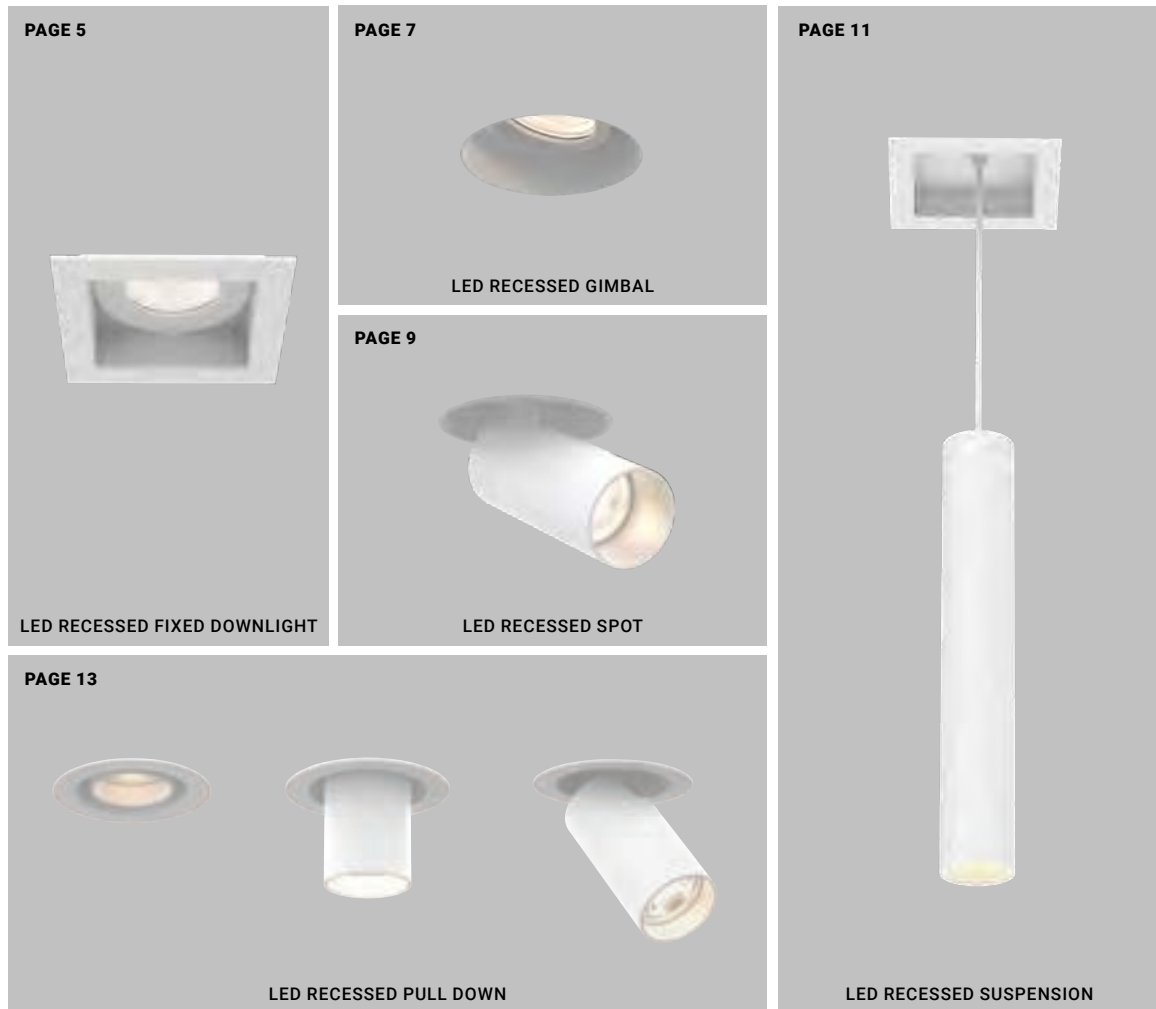

COMPLETE TANGO FIXTURE ORDERING GUIDES

TANGO 1-LIGHT ROUND	15 - 16
TANGO 1-LIGHT SQUARE	17 - 18
TANGO 2-LIGHT SQUARE	19 - 20
TANGO 3-LIGHT SQUARE	21 - 22

THE
TANGO
REMIX








Shown as round Trim Fixed

2" Tango LED Recessed Fixed Downlight

SPECIFICATIONS

Construction:	Aluminum Body, Powder Coated Finish
Wattage:	10W IC Rated, 15W Non-IC Rated
Lumens:	840 Lumens, 1180 Lumens
Power Supply:	ERP Brand, 250mA, 10W or 350mA, 15W Constant Current driver, enclosed in Junction Box with 12" flexible cable to mate to module connector
Light Module:	High output, high efficiency LED COB
Lumen Maintenance:	70% @ 50,000 hours
CRI:	90+
Input Voltage:	120V-277V
Dimmable:	TRIAC, ELV, 0-10V
Approval:	Wet
Color Finish Options:	☐ Matte White ☐ Matte Black ☐ Custom
Electrical Approval:	COMPLIANT
Warranty:	

KELVIN OPTIONS



DIM-TO-WARM OPTION (15W)


1800K - 3000K / 785 Lumens





DIFFUSER OPTIONS



REFLECTOR OPTIONS



ADD-ONS

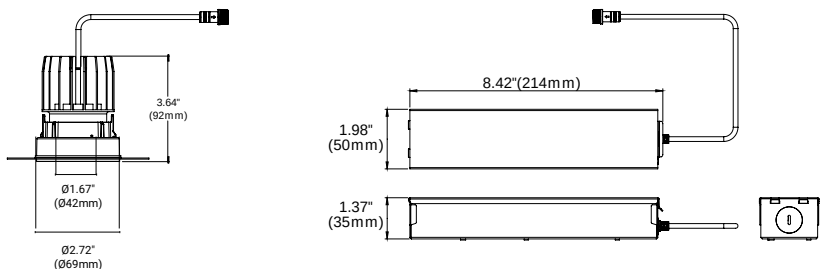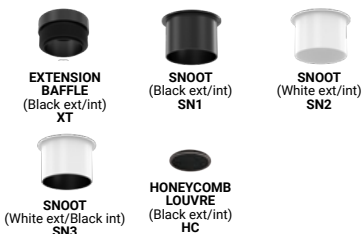

*Shallow Ceiling Application

COMPATIBLE TRIMS + TRIMLESS MESH PLATES




Recessed Trims and Trimless Mesh Plates for remodel application.
New Construction plates and IC boxes found within ordering guide.

COMPLETE TANGO RECESSED FIXED ORDERING GUIDES

	1 LT ROUND RECESSED Ordering Guide	Page 15 - 16
	1 LT SQUARE RECESSED Ordering Guide	Page 17 - 18
	2 LT SQUARE RECESSED Ordering Guide	Page 19 - 20
	3 LT SQUARE RECESSED Ordering Guide	Page 21 - 22






Shown as round Trim Gimbal

2" Tango LED Recessed Gimbal

SPECIFICATIONS

Construction:	Aluminum Body, Powder Coated Finish
Wattage:	10W IC Rated, 15W Non-IC Rated
Lumens:	840 Lumens, 1180 Lumens
Power Supply:	ERP Brand, 250mA, 10W or 350mA, 15W Constant Current driver, enclosed in Junction Box with 12" flexible cable to mate to module connector
Light Module:	High output, high efficiency LED COB
Lumen Maintenance:	70%@50,000 hours
CRI:	90+
Adjustability:	20°
Input Voltage:	120V-277V
Dimmable:	TRIAC, ELV, 0-10V
Approval:	Damp
Color Finish Options:	☐ Matte White ☐ Matte Black ☐ Custom
Electrical Approval:	
Warranty:	

KELVIN OPTIONS



DIM-TO-WARM OPTION (15W)


1800K - 3000K / 785 Lumens





DIFFUSER OPTIONS



REFLECTOR OPTIONS



ADD-ONS

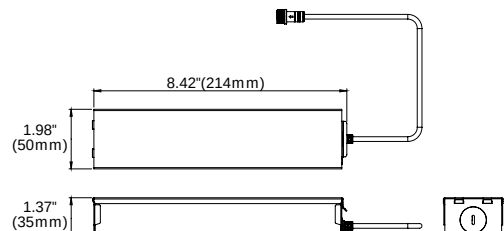

*Shallow Ceiling Application

COMPATIBLE TRIMS + TRIMLESS MESH PLATES




Recessed Trims and Trimless Mesh Plates for remodel application. New Construction plates and IC boxes found within ordering guide.

COMPLETE TANGO RECESSED GIMBAL ORDERING GUIDES

	1 LT ROUND RECESSED Ordering Guide	Page 15 - 16
	1 LT SQUARE RECESSED Ordering Guide	Page 17 - 18
	2 LT SQUARE RECESSED Ordering Guide	Page 19 - 20
	3 LT SQUARE RECESSED Ordering Guide	Page 21 - 22




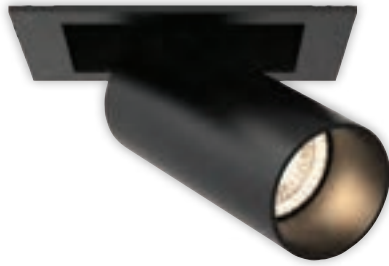


2" Tango LED Recessed Spot

Shown as square Trim Spot

SPECIFICATIONS

Construction:	Aluminum Body, Powder Coated Finish
Wattage:	15W IC Rated
Lumens:	830 Lumens
Power Supply:	ERP Brand, 350mA, 15W Constant Current driver, enclosed in Junction Box with 12" flexible cable to mate to module connector
Light Module:	High output, high efficiency LED COB
Lumen Maintenance:	70% @ 50,000 hours
CRI:	90+
Adjustability:	80° (Vertical Adjustment)
Rotation:	355°
Input Voltage:	120V-277V
Dimming:	TRIAC/ELV/0-10V
Approval:	Damp
Color Finish Options:	☐ Matte White ☐ Matte Black ☐ Custom
Electrical Approval:	COMPLIANT
Warranty:	

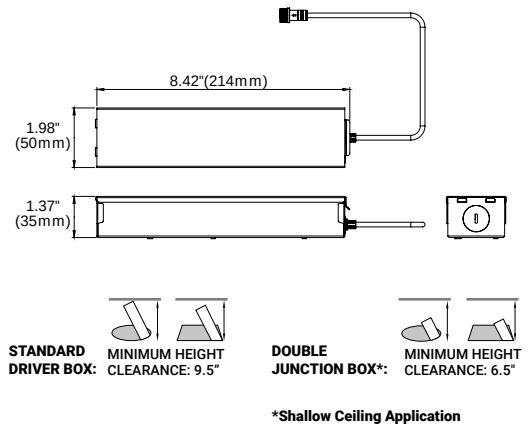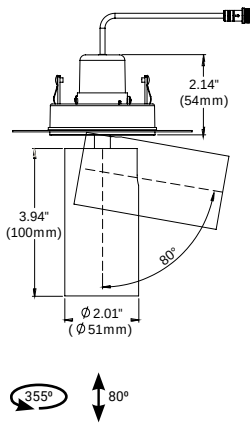

COMPATIBLE TRIMS + TRIMLESS MESH PLATES



KELVIN OPTIONS	DIFFUSER	REFLECTOR
3000K 4000K	Clear Lens (CL)	(N) 15° Narrow

Recessed Trims and Trimless Mesh Plates for remodel application. New Construction plates and IC boxes found within ordering guide.

COMPLETE TANGO RECESSED SPOT ORDERING GUIDES



1 LT ROUND RECESSED
Ordering Guide
Page 15 - 16



1 LT SQUARE RECESSED
Ordering Guide
Page 17 - 18



2 LT SQUARE RECESSED
Ordering Guide
Page 19 - 20



3 LT SQUARE RECESSED
Ordering Guide
Page 21 - 22







2" Tango LED Recessed Suspension

Shown as round Trim Suspension

SPECIFICATIONS

Construction:	Aluminum Body, Powder Coated Finish
Wattage:	15W IC Rated
Lumens:	830 Lumens
Power Supply:	ERP Brand, 350mA, 15W Constant Current driver, enclosed in Junction Box with 12" flexible cable to mate to module connector
Light Module:	High output, high efficiency LED COB
Lumen Maintenance:	70% @ 50,000 hours
CRI:	90+
Input Voltage:	120V-277V
Dimming:	TRIAC/ELV/0-10V
Approval:	Damp
Color Finish Options:	☐ Matte White ☐ Matte Black ☐ Custom
Electrical Approval:	COMPLIANT
Warranty:	

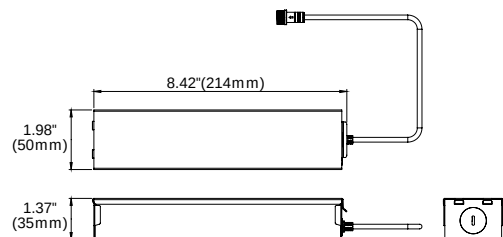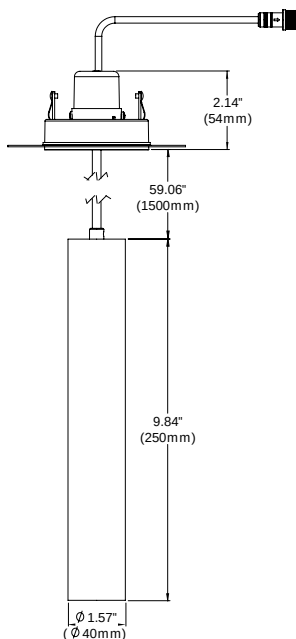

**STANDARD
DRIVER BOX:** MINIMUM HEIGHT
CLEARANCE: 9.5"

**DOUBLE
JUNCTION BOX*:** MINIMUM HEIGHT
CLEARANCE: 6.5"

*Shallow Ceiling Application

COMPATIBLE TRIMS + TRIMLESS MESH PLATES



KELVIN OPTIONS



DIFFUSER



REFLECTOR



Recessed Trims and Trimless Mesh Plates for remodel application.
New Construction plates and IC boxes found within ordering guide.

COMPLETE TANGO RECESSED SUSPENSION ORDERING GUIDES



1 LT ROUND **RECESSED**
Ordering Guide
Page 15 - 16



1 LT SQUARE **RECESSED**
Ordering Guide
Page 17 - 18



2 LT SQUARE **RECESSED**
Ordering Guide
Page 19 - 20



3 LT SQUARE **RECESSED**
Ordering Guide
Page 21 - 22







Shown as round Trim Pull Down

2" Tango LED Recessed Pull Down


SPECIFICATIONS

Construction:	Aluminum Body, Powder Coated Finish
Wattage:	15W IC Rated
Lumens:	830 Lumens
Power Supply:	ERP Brand, 350mA, 15W Constant Current driver, enclosed in Junction Box with 12" flexible cable to mate to module connector
Light Module:	High output, high efficiency LED COB
Lumen Maintenance:	70%@50,000 hours
CRI:	90+
Adjustability:	80°
Rotation:	355°
Functionality:	Egress/Regress
Input Voltage:	120V-277V
Dimming:	TRIAC/ELV/0-10V
Approval:	Damp
Color Finish Options:	☐ Matte White ☐ Matte Black ☐ Custom
Electrical Approval:	COMPLIANT
Warranty:	

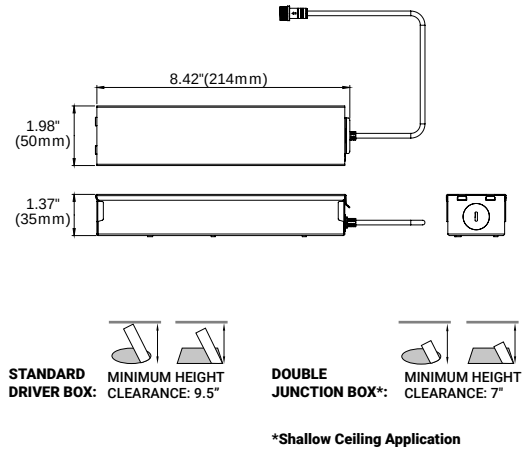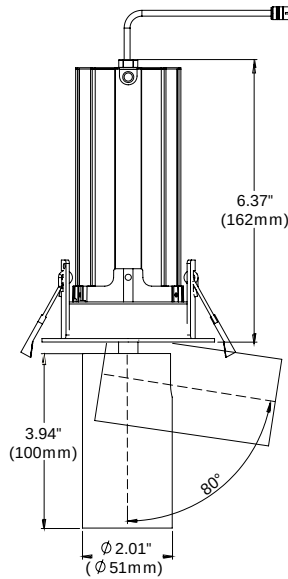


*Shallow Ceiling Application

COMPATIBLE TRIMS + TRIMLESS MESH PLATES

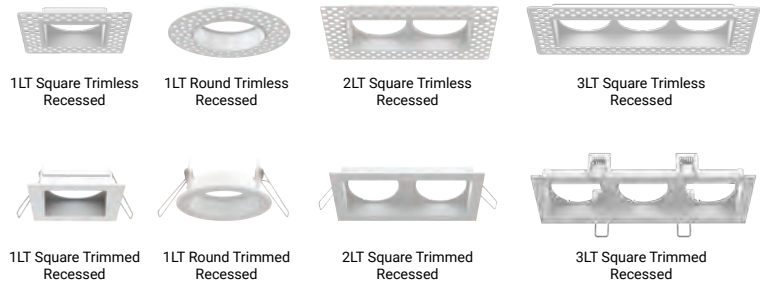

Recessed Trims and Trimless Mesh Plates for remodel application. New Construction plates and IC boxes found within ordering guide.

COMPLETE TANGO RECESSED PULL DOWN ORDERING GUIDES

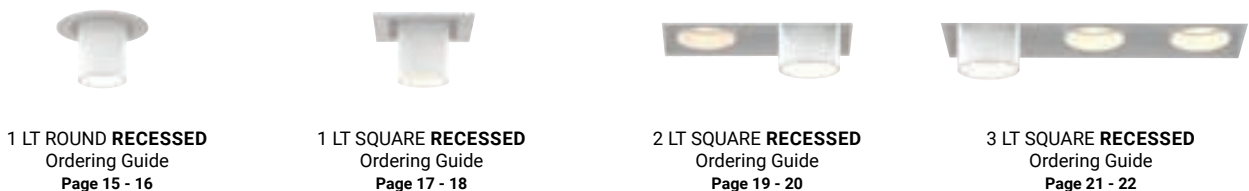



TANGO

Architectural Recessed Fixture

FEATURES

Tango is a specification grade LED recessed family, offering multiple options for design and functionality. Round and square, trim and trimless, 1-, 2- and 3-light options and several task specific trim designs. Tango features 90+ CRI high performance LED chips, drivers with multi dimming capabilities and industry leading ease of installation and services.

SPECIFICATIONS

FIXTURE BODY

- 18 gauge powder coated steel body. Aluminum powder coated trim or mesh plate.
- Standard in white or black finish. Other finishes consult factory

TRIM CUT HOLE: $\phi 3 \frac{1}{4}"$

TRIMLESS CUT HOLE: $\phi 3 \frac{1}{4}"$

STANDARD DRIVER BOX: MINIMUM HEIGHT CLEARANCE: $9 \frac{1}{2}"$

DOUBLE JUNCTION BOX: MINIMUM HEIGHT CLEARANCE: See preceding modules pages

- Maximum ceiling thickness:
 - Trimless: $1 \frac{1}{2}"$
 - Trim: $1 \frac{1}{4}"$

MOUNTING

- Remodel application, new construction plates or IC / Airtight / enclosures sold separately

POWER SUPPLY

- ERP Brand 120V - 277V input, Constant Current 10W 250mA or 15W 350mA power supply
- Thermally protected
- Minimum operating temperature: -30°
- Enclosed Junction box with 12" flexible cable to mate to module connector
- Dimming: TRIAC, ELV and 0-10V

LIGHT MODULE ★

- High output, high efficiency LED COB
- CRI 90+
- Lumen Maintenance: 70% @ 50,000 hrs
- Recessed Fixed Light module wet listed, all others damp listed
- Recessed Fixed & Recessed Gimbal: 10W, IC Rated, 840 Lumens, 15W, Non-IC Rated, 1180 Lumens, all CCTs listed available
- Spot, Suspension & Pull Down: 15W, IC Rated, 830 Lumens, 3000K & 4000K
- Dim-to-Warm modules 15W only, Non-IC, CCT Range 1800K to 3000K, 785 Lumens, available with Recessed Fixed & Recessed Gimbal only

REFLECTORS ★

- Recessed Fixed & Recessed Gimbal available in Narrow, Medium & Wide
- Spot & Suspension available in Narrow only
- Pull Down 30°

ELECTRICAL APPROVAL




WARRANTY



2" Tango LED 1 LT Round Ordering Guide

1 SELECT BETWEEN TRIM / TRIMLESS

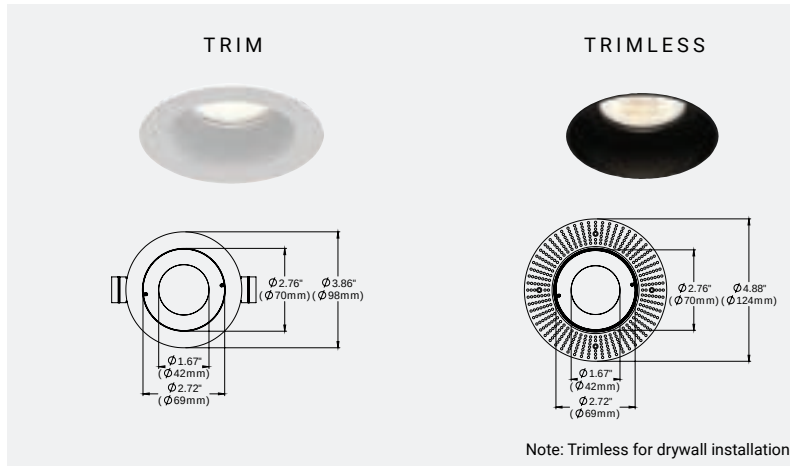


2 SELECT FINISH



3 SELECT LIGHT MODULE




★ 4 SELECT DRIVER / MODULE WATTAGE 10W or 15W

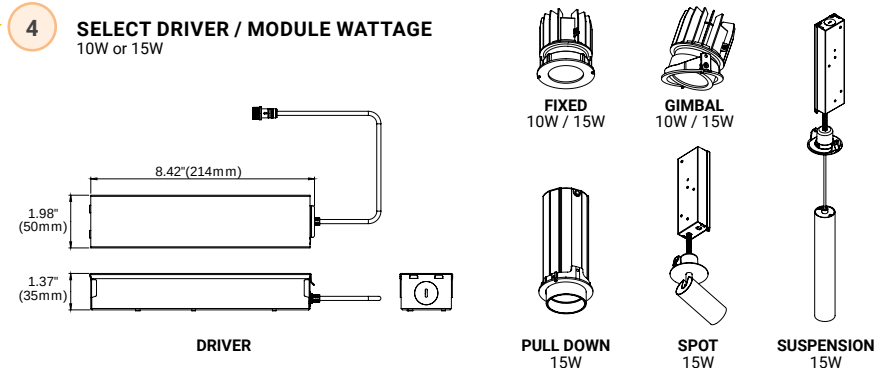


5 SELECT CCT


KELVIN OPTIONS



DIM-TO-WARM OPTION (15W)




6 SELECT REFLECTOR



7 SELECT DIFFUSER



8 ADD-ONS

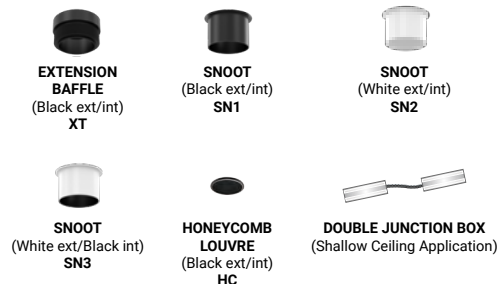

ORDERING GUIDE CONFIGURATOR

TGO	1R	1		2		3		4		5		6		7		8	
TANGO	1-LIGHT ROUND	TRIM/ TRIMLESS		FINISH		LIGHT MODULE 1		WATTAGE		CCT	BEAM ANGLE**		DIFFUSER**		ADD-ONS**		
TGO	1R	T	TRIM	01	BLACK	RF	RECESSED FIXED	10	10W	27	N	15°	CL	CLEAR	XT	EXTENSION BAFFLE	
		TL	TRIMLESS	02	WHITE	RG	RECESSED GIMBAL	15	15W	30	M	24°	LN	LINEAR SPREAD	SN1	SNOOT (BK/BK)	
						ST	SPOT*			35	W	38°	FR	FROSTED	SN2	SNOOT (WH/WH)	
						SU	SUSPENSION*			40			SP	SOLITE	SN3	SNOOT (WH/BK)	
						PD	PULLDOWN*			DTW** Dim To Warm			RE	RED DICHROIC	HC	HONEYCOMB LOUVRE	
														GR	GREEN DICHROIC	DJ	DOUBLE JUNCTION BOX
														BL	BLUE DICHROIC		
														OR	ORANGE DICHROIC		
ORDERING GUIDE EXAMPLE:						*NOTE: SU/ST, 15W, 3000K or											

ORDERING GUIDE EXAMPLE:

Tango / 1-Light Round / Trim / Black / Recessed Fixed / 10W / 3000K / 38° Beam Angle / Clear Diffuser

CODE: **TGO-1R-T-01-RF-10-30-W-CL**

*NOTE:
SU/ST, 15W, 3000K or 4000K, 10° only
PD, 15W, 3000K or 4000K, 30° only



**NOTE: Options 5, 6, 7 & 8,
For use with Recessed Fixed (RF) & Recessed Gimbal (RG) only

NEW CONSTRUCTION PLATES + IC/AT BOXES




TRIM & TRIMLESS
30534-018

CUT HOLE:
Trim & Trimless : $\varnothing 3 \frac{1}{4}$ "

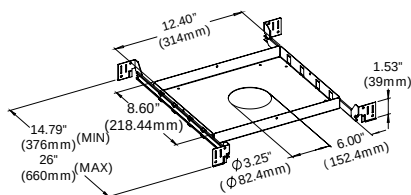

TRIM & TRIMLESS
AT/IC Box: 30530-026
IC Box: 30530-010

CUT HOLE:
Trim & Trimless : $\varnothing 3 \frac{1}{4}$ "

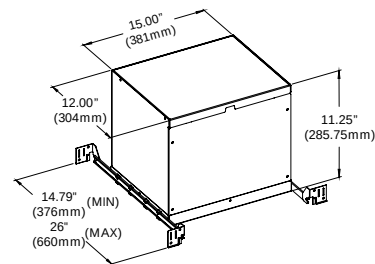

TANGO

Architectural Recessed Fixture

FEATURES

Tango is a specification grade LED recessed family, offering multiple options for design and functionality. Round and square, trim and trimless, 1-, 2- and 3-light options and several task specific trim designs. Tango features 90+ CRI high performance LED chips, drivers with multi dimming capabilities and industry leading ease of installation and services.

SPECIFICATIONS

FIXTURE BODY

- 18 gauge powder coated steel body. Aluminum powder coated trim or mesh plate.
- Standard in white or black finish. Other finishes consult factory

 TRIM CUT HOLE: 3 1/4" x 3 1/4"

 TRIMLESS CUT HOLE: 3 1/4" x 3 1/4"

 STANDARD DRIVER BOX: MINIMUM HEIGHT CLEARANCE: 9 1/2"

 DOUBLE JUNCTION BOX: MINIMUM HEIGHT CLEARANCE: See preceding modules pages

- Maximum ceiling thickness:
 - Trimless: 1 1/2"
 - Trim: 1 1/4"

MOUNTING

- Remodel application, new construction plates or IC / Airtight / enclosures sold separately

POWER SUPPLY

- ERP Brand 120V - 277V input, Constant Current 10W 250mA or 15W 350mA power supply
- Thermally protected
- Minimum operating temperature: -30°
- Enclosed Junction box with 12" flexible cable to mate to module connector
- Dimming: TRIAC, ELV and 0-10V

LIGHT MODULE ★

- High output, high efficiency LED COB
- CRI 90+
- Lumen Maintenance: 70% @ 50,000 hrs
- Recessed Fixed Light module wet listed, all others damp listed
- Recessed Fixed & Recessed Gimbal: 10W IC Rated, 840 Lumens, 15W Non-IC Rated, 1180 Lumens, all CCTs listed available
- Spot, Suspension & Pull Down: 15W, IC Rated, 830 Lumens, 3000K & 4000K
- Dim-to-Warm modules 15W only, Non-IC, CCT Range 1800K to 3000K, 785 Lumens, available with Recessed Fixed & Recessed Gimbal only

REFLECTORS ★

- Recessed Fixed & Recessed Gimbal available in Narrow, Medium & Wide
- Spot & Suspension available in Narrow only
- Pull Down 30°

ELECTRICAL APPROVAL




WARRANTY



2" Tango LED 1 LT Square Ordering Guide

1 SELECT BETWEEN TRIM / TRIMLESS

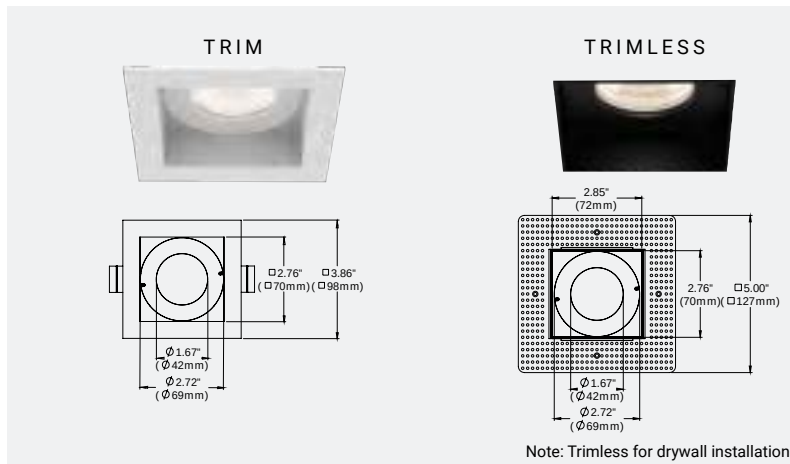


2 SELECT FINISH



3 SELECT LIGHT MODULE




★ 4 SELECT DRIVER / MODULE WATTAGE 10W or 15W

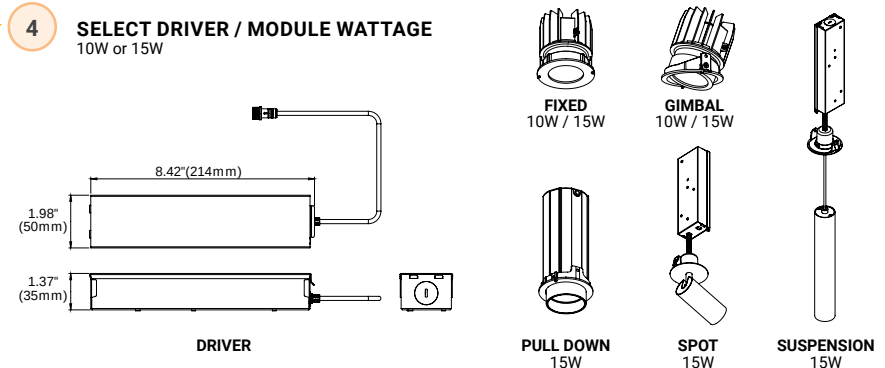


5 SELECT CCT


KELVIN OPTIONS



DIM-TO-WARM OPTION (15W)




6 SELECT REFLECTOR



7 SELECT DIFFUSER



8 ADD-ONS

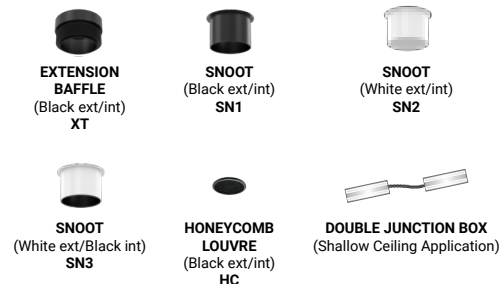

ORDERING GUIDE CONFIGURATOR

TGO	1S	1		2		3		4		5	6		7		8		
TANGO	1-LIGHT SQUARE	TRIM/ TRIMLESS		FINISH		LIGHT MODULE 1		WATTAGE		CCT	BEAM ANGLE**		DIFFUSER**		ADD-ONS**		
TGO	1S	T	TRIM	01	BLACK	RF	RECESSED FIXED	10	10W	27	N	15°	CL	CLEAR	XT	EXTENSION BAFFLE	
		TL	TRIMLESS	02	WHITE	RG	RECESSED GIMBAL	15	15W	30	M	24°	LN	LINEAR SPREAD	SN1	SNOOT (BK/BK)	
						ST	SPOT*			35	W	38°	FR	FROSTED	SN2	SNOOT (WH/WH)	
						SU	SUSPENSION*			40			SP	SOLITE	SN3	SNOOT (WH/BK)	
						PD	PULLDOWN*			DTW** Dim To Warm			RE	RED DICHROIC	HC	HONEYCOMB LOUVRE	
														GR	GREEN DICHROIC	DJ	DOUBLE JUNCTION BOX
														BL	BLUE DICHROIC		
														OR	ORANGE DICHROIC		
ORDERING GUIDE EXAMPLE						*NOTE: SU/ST, 15W, 3000K or											

ORDERING GUIDE EXAMPLE:

Tango / 1-Light Square / Trimless / White / Spot / 15W / 3000K

CODE: **TGO-1S-TL-02-ST-15-30**

*NOTE:
SU/ST, 15W, 3000K or 4000K, 10° only
PD, 15W, 3000K or 4000K, 30° only

**NOTE: Options 5, 6, 7 & 8,
For use with Recessed Fixed (RF) & Recessed Gimbal (RG) only


NEW CONSTRUCTION PLATES + IC/AT BOXES



TRIM & TRIMLESS
30535-015

CUT HOLE:


Trim & Trimless : 3 1/4" x 3 1/4"

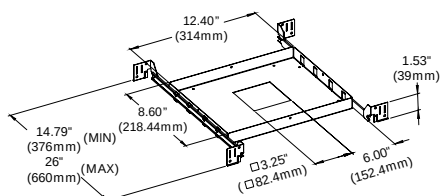

TRIM & TRIMLESS
AT/IC Box: 30531-021
IC Box: 30531-017

CUT HOLE:

Trim & Trimless : 3 1/4" x 3 1/4"

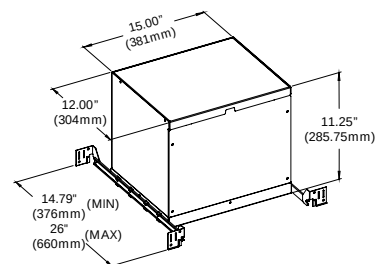

TANGO

Architectural Recessed Fixture

FEATURES

Tango is a specification grade LED recessed family, offering multiple options for design and functionality. Round and square, trim and trimless, 1-, 2- and 3-light options and several task specific trim designs. Tango features 90+ CRI high performance LED chips, drivers with multi dimming capabilities and industry leading ease of installation and services.

SPECIFICATIONS

FIXTURE BODY

- 18 gauge powder coated steel body. Aluminum powder coated trim or mesh plate.
- Standard in white or black finish. Other finishes consult factory

 **TRIM CUT HOLE:** 7" x 3 1/4"

 **TRIMLESS CUT HOLE:** 7" x 3 1/4"

 **STANDARD DRIVER BOX:** **MINIMUM HEIGHT CLEARANCE:** 9 1/2"

 **DOUBLE JUNCTION BOX:** **MINIMUM HEIGHT CLEARANCE:** See preceding modules pages

- Maximum ceiling thickness:
 - Trimless: 1 1/2"
 - Trim: 1 1/4"

MOUNTING

- Remodel application, new construction plates or IC / Airtight / enclosures sold separately

POWER SUPPLY

- 2 x ERP Brand 120V - 277V input, Constant Current 10W 250mA or 15W 350mA power supply per light module
- Thermally protected
- Minimum operating temperature: -30°
- Enclosed Junction box with 12" flexible cable to mate to module connector
- Dimming: TRIAC, ELV and 0-10V

LIGHT MODULE ★

- High output, high efficiency LED COB
- CRI 90+
- Lumen Maintenance: 70% @ 50,000 hrs
- Recessed Fixed Light module wet listed, all others damp listed
- Recessed Fixed & Recessed Gimbal: 10W IC Rated, 840 Lumens, 15W Non-IC Rated, 1180 Lumens, all CCTs listed available
- Spot, Suspension & Pull Down: 15W, IC Rated, 830 Lumens, 3000K & 4000K
- Dim-to-Warm modules 15W only, Non-IC, CCT Range 1800K to 3000K, 785 Lumens, available with Recessed Fixed & Recessed Gimbal only

REFLECTORS ★

- Recessed Fixed & Recessed Gimbal available in Narrow, Medium & Wide
- Spot & Suspension available in Narrow only
- Pull Down 30°

ELECTRICAL APPROVAL




WARRANTY



2" Tango LED 2 LT Square Ordering Guide

1 SELECT BETWEEN TRIM / TRIMLESS

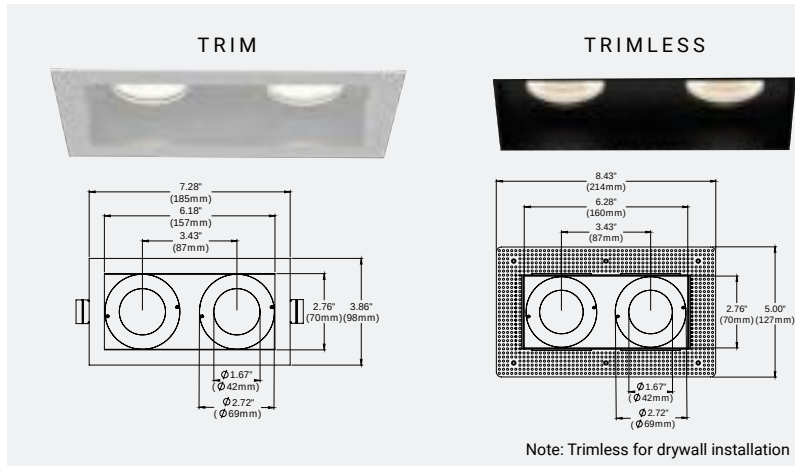


2 SELECT FINISH



3 SELECT LIGHT MODULE 1





4 SELECT LIGHT MODULE 2

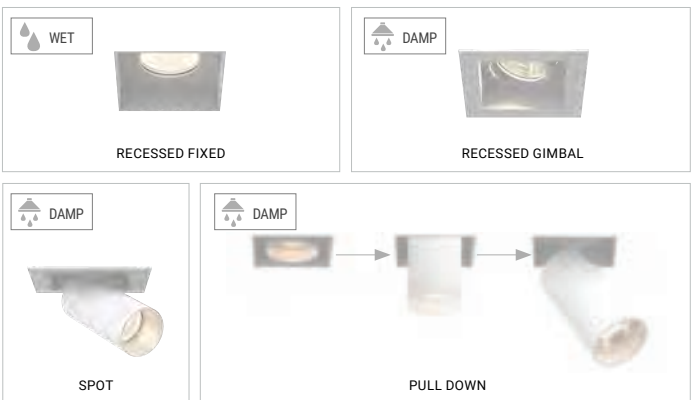

★ 5 SELECT DRIVER / MODULE WATTAGE

10W or 15W
(One Driver per module)

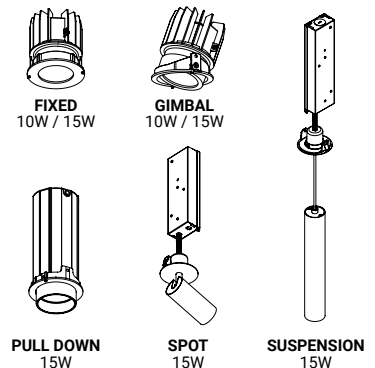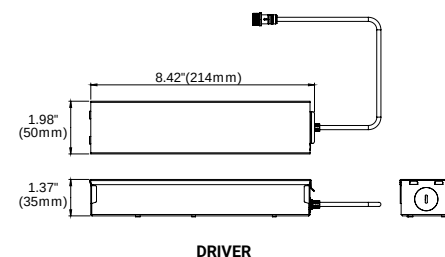

6

SELECT CCT

KELVIN OPTIONS

2700K

3000K

3500K

4000K

DIM-TO-WARM OPTION (15W)

1800K - 3000K / 785 Lumens

7

SELECT REFLECTOR

(N) 15° Narrow

(M) 24° Medium

(W) 38° Wide

8

SELECT DIFFUSER

Clear Lens (CL)

Linear Spread Lens (LN)

Frosted Lens (FR)

Solite Lens (SP)

Red Dichroic (RE)

Green Dichroic (GR)

Blue Dichroic (BL)

Orange Dichroic (OR)

9

ADD-ONS

EXTENSION BAFFLE (Black ext/int) XT

SNOOT (Black ext/int) SN1

SNOOT (White ext/Black int) SN3

SNOOT (White ext/int) SN2

HONEYCOMB LOUVRE (Black ext/int) HC

DOUBLE JUNCTION BOX (Shallow Ceiling Application)

ORDERING GUIDE CONFIGURATOR

TGO	2	1		2		3		4		5		6		7	
TANGO	2-LIGHT SQUARE	TRIM/ TRIMLESS		FINISH		LIGHT MODULE 1		LIGHT MODULE 2		WATTAGE		CCT		BEAM ANGLE**	
TGO	2	T	TRIM	01	BLACK	RF	RECESSED FIXED	RF	RECESSED FIXED	10	10W	27	N	15°	DTW** Dim To Warm
		TL	TRIMLESS	02	WHITE	RG	RECESSED GIMBAL	RG	RECESSED GIMBAL	15	15W	30	M	24°	
						ST	SPOT*	SU	SUSPENSION*			35	W	38°	
						SU	SUSPENSION*	ST	SPOT*			40			
						PD	PULLDOWN*	PD	PULLDOWN*						
						*NOTE: SU/ST, 15W, 3000K or 4000K, 10° only PD, 15W, 3000K or 4000K, 30° only									
		8				9									
		DIFFUSER**				ADD-ONS**									
		CL	CLEAR	XT	EXTENSION BAFFLE										
		LN	LINEAR SPREAD	SN1	SNOOT (BK/BK)										
		FR	FROSTED	SN2	SNOOT (WH/WH)										
		SP	SOLITE	SN3	SNOOT (WH/BK)										
		RE	RED DICHROIC	HC	HONEYCOMB LOUVRE										
		GR	GREEN DICHROIC	DJ	DOUBLE JUNCTION BOX										
		BL	BLUE DICHROIC												
		OR	ORANGE DICHROIC												

ORDERING GUIDE EXAMPLE 1:

Tango / 2-Light Square / Trim / Black / Recessed Fixed / Recessed Gimbal / 10 Watt / 3000K / 24° Beam Angle

CODE: **TGO-2S-T-01-RFRG-10-30-M**

.....

ORDERING GUIDE EXAMPLE 2:

Tango / 2-Light Square / Trimless / White / Suspension / Spot / 15 Watt / 3000K

CODE: **TGO-2S-TL-02-SUST-15-30**

**NOTE: Options 5, 6, 7 & 8,
For use with Recessed Fixed (RF) & Recessed Gimbal (RG) only

ORDERING GUIDE EXAMPLE 1:

Tango / 2-Light Square / Trim / Black / Recessed Fixed / Recessed Gimbal / 10 Watt / 3000K / 24° Beam Angle

CODE: **TGO-2S-T-01-RFRG-10-30-M**

ORDERING GUIDE EXAMPLE 2:

Tango / 2-Light Square / Trimless / White / Suspension / Spot / 15 Watt / 3000K

CODE: **TGO-2S-TL-02-SUST-15-30**


NEW CONSTRUCTION PLATES + IC/AT BOXES



TRIM & TRIMLESS
41949-016

CUT HOLE:


Trim & Trimless : 7" x 3 1/4"

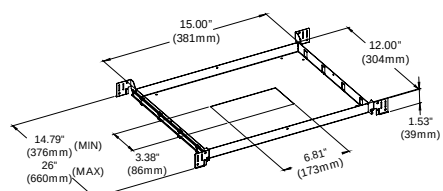

TRIM & TRIMLESS
AT/IC Box: 41951-019
IC Box: 41950-012

CUT HOLE:

Trim & Trimless : 7" x 3 1/4"

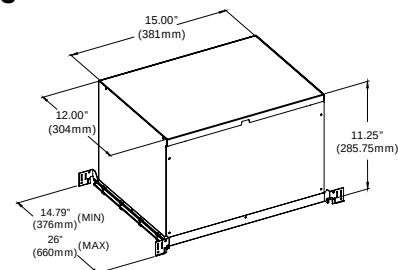

TANGO

Architectural Recessed Fixture

FEATURES

Tango is a specification grade LED recessed family, offering multiple options for design and functionality. Round and square, trim and trimless, 1-, 2- and 3-light options and several task specific trim designs. Tango features 90+ CRI high performance LED chips, drivers with multi dimming capabilities and industry leading ease of installation and services.

SPECIFICATIONS

FIXTURE BODY

- 18 gauge powder coated steel body. Aluminum powder coated trim or mesh plate.
- Standard in white or black finish. Other finishes consult factory

- **TRIM CUT HOLE:** 10 1/8" x 3 3/8"
- **TRIMLESS CUT HOLE:** 10 1/2" x 3 1/4"

- **STANDARD DRIVER BOX:** MINIMUM HEIGHT CLEARANCE: 9 1/2"
- **DOUBLE JUNCTION BOX:** MINIMUM HEIGHT CLEARANCE: See preceding modules pages

- Maximum ceiling thickness:
 - Trimless: 1 1/2"
 - Trim: 1 1/4"

MOUNTING

- Remodel application, new construction plates or IC / Airtight / enclosures sold separately

POWER SUPPLY

- 3 x ERP Brand 120V - 277V input, Constant Current 10W 250mA or 15W 350mA power supply per light module
- Thermally protected
- Minimum operating temperature: -30°
- Enclosed Junction box with 12" flexible cable to mate to module connector
- Dimming: TRIAC, ELV and 0-10V

LIGHT MODULE ★

- High output, high efficiency LED COB
- CRI 90+
- Lumen Maintenance: 70% @ 50,000 hrs
- Recessed Fixed Light module wet listed, all others damp listed
- Recessed Fixed & Recessed Gimbal: 10W IC Rated, 840 Lumens, 15W Non-IC Rated, 1180 Lumens, all CCTs listed available
- Spot, Suspension & Pull Down: 15W, IC Rated, 830 Lumens, 3000K & 4000K
- Dim-to-Warm modules 15W only, Non-IC, CCT Range 1800K to 3000K, 785 Lumens, available with Recessed Fixed & Recessed Gimbal only

REFLECTORS ★

- Recessed Fixed & Recessed Gimbal available in Narrow, Medium & Wide
- Spot & Suspension available in Narrow only
- Pull Down 30°

ELECTRICAL APPROVAL




WARRANTY



2" Tango LED 3 LT Square Ordering Guide

1 SELECT BETWEEN TRIM / TRIMLESS

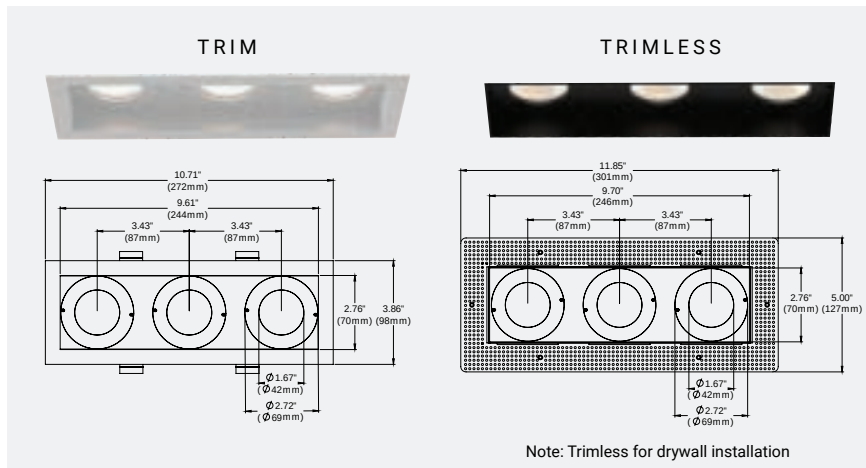


2 SELECT FINISH



3 SELECT LIGHT MODULE 1



4 SELECT LIGHT MODULE 2




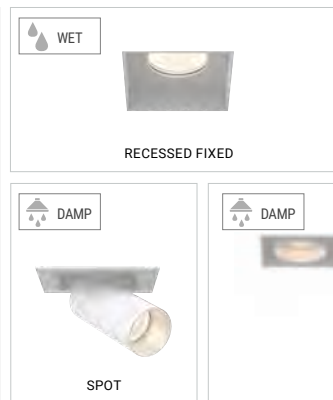


5 SELECT LIGHT MODULE 3



★ 6 SELECT DRIVER / MODULE WATTAGE

10W or 15W
(One Driver per module)

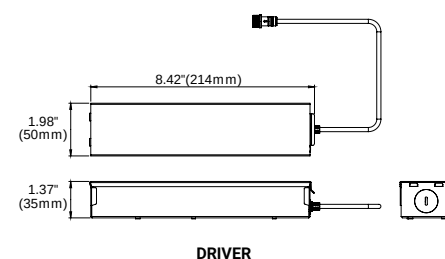

7 SELECT CCT

KELVIN OPTIONS

2700K 3000K 3500K 4000K

DIM-TO-WARM OPTION (15W)

1800K - 3000K / 785 Lumens

8 SELECT REFLECTOR

(N) 15° Narrow

(M) 24° Medium

(W) 38° Wide

9 SELECT DIFFUSER

Clear Lens (CL)

Linear Spread Lens (LN)

Frosted Lens (FR)

Solite Lens (SP)

Red Dichroic (RE)

Green Dichroic (GR)

Blue Dichroic (BL)

Orange Dichroic (OR)

10 ADD-ONS

EXTENSION BAFFLE (Black ext/int) XT

SNOOT (Black ext/int) SN1

SNOOT (White ext/Black int) SN3

SNOOT (White ext/int) SN2

HONEYCOMB LOUVRE (Black ext/int) HC

DOUBLE JUNCTION BOX (Shallow Ceiling Application)

ORDERING GUIDE CONFIGURATOR

TGO	3	1	2	3	4	5	6
TANGO	3-LIGHT SQUARE	TRIM/ TRIMLESS	FINISH	LIGHT MODULE 1	LIGHT MODULE 2	LIGHT MODULE 3	WATTAGE
TGO	3	T TRIM	01 BLACK	RF RECESSED FIXED	RF RECESSED FIXED	RF RECESSED FIXED	10 10W
		TL TRIMLESS	02 WHITE	RG RECESSED GIMBAL	RG RECESSED GIMBAL	RG RECESSED GIMBAL	15 15W
				ST SPOT*	ST SPOT*	ST SPOT*	
				SU SUSPENSION*	SU SUSPENSION*	SU SUSPENSION*	
				PD PULLDOWN*	PD PULLDOWN*	PD PULLDOWN*	

*NOTE: SU/ST, 15W, 3000K or 4000K, 10° only. PD, 15W, 3000K or 4000K, 30° only

7	8	9	10
CCT	BEAM ANGLE**	DIFFUSER**	ADD-ONS**
27	N 15°	CL CLEAR	XT EXTENSION BAFFLE
30	M 24°	LN LINEAR SPREAD	SN1 SNOOT (BK/BK)
35	W 38°	FR FROSTED	SN2 SNOOT (WH/WH)
40		SP SOLITE	SN3 SNOOT (WH/BK)
DTW** Dim To Warm		RE RED DICHROIC	HC HONEYCOMB LOUVRE
		GR GREEN DICHROIC	DJ DOUBLE JUNCTION BOX
		BL BLUE DICHROIC	
		OR ORANGE DICHROIC	

**NOTE: Options 5, 6, 7 & 8, For use with Recessed Fixed (RF) & Recessed Gimbal (RG) only

ORDERING GUIDE EXAMPLE 1:

Tango / 3-Light Square / Trim / Black / Recessed Fixed / Recessed Gimbal / Recessed Fixed / 10 Watt / 2700K / 15° Beam Angle / Clear Diffuser

CODE: **TGO-3S-T-01-RFRGRF-10-27-N-CL**

ORDERING GUIDE EXAMPLE 2:

Tango / 3-Light Square / Trimless / White / Suspension / Spot / Suspension / 15 Watt / 3000K

CODE: **TGO-3S-TL-02-SUSTSU-15-30**

NEW CONSTRUCTION PLATES + IC/AT BOXES

TRIM
41952-016

TRIMLESS
43668-014

CUT HOLE:
Trim: 10 1/8" x 3 3/8"
Trimless: 10 1/2" x 3 1/4"

15.00" (381mm)

12.00" (305mm)

1.53" (39mm)

14.79" (376mm) (MIN)

26" (660mm) (MAX)

3.38" (86mm)

10.25" (260mm)

TRIM
AT/IC Box: 41954-010
IC Box: 41953-013

TRIMLESS
AT/IC Box: 43670-017
IC Box: 43669-011

CUT HOLE:
Trim: 10 1/8" x 3 3/8"
Trimless: 10 1/2" x 3 1/4"

26.00" (660.40mm)

12.00" (305mm)

14.79" (376mm) (MIN)

26" (660mm) (MAX)

26.00" (660.40mm)

12.00" (305mm)



11.25" (285.75mm)

14.79" (376mm) (MIN)



26" (660mm) (MAX)

FIXED DOWNLIGHT



10W 1-LIGHT FIXED NARROW CLEAR

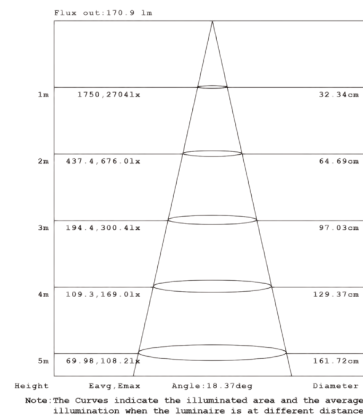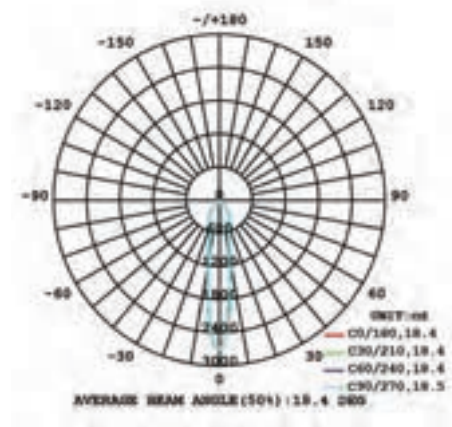

10W 1-LIGHT FIXED MEDIUM CLEAR

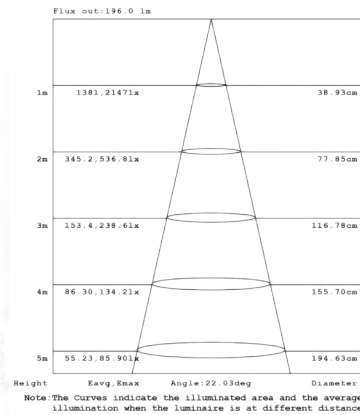
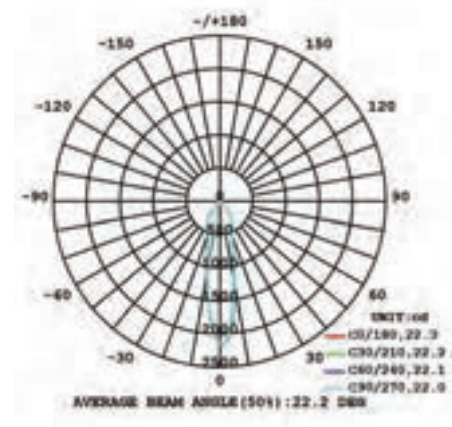


10W 1-LIGHT FIXED WIDE CLEAR

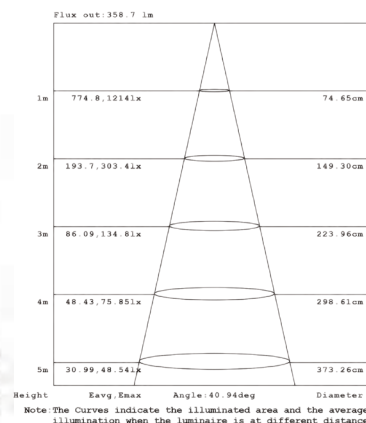
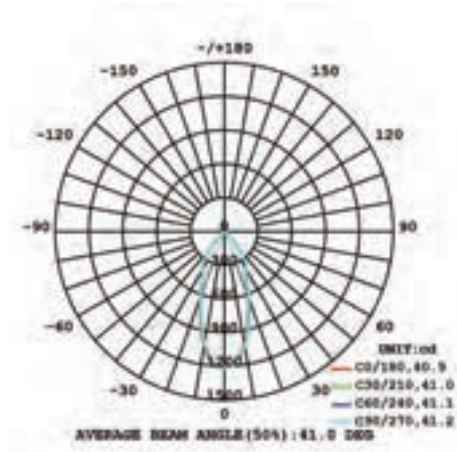


FIXED DOWNLIGHT



15W 1-LIGHT FIXED NARROW CLEAR

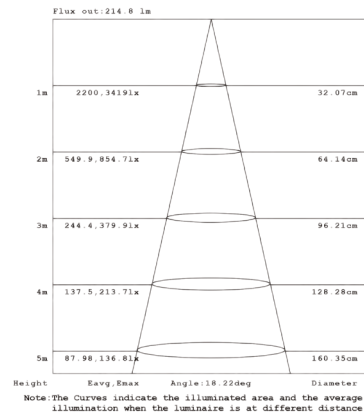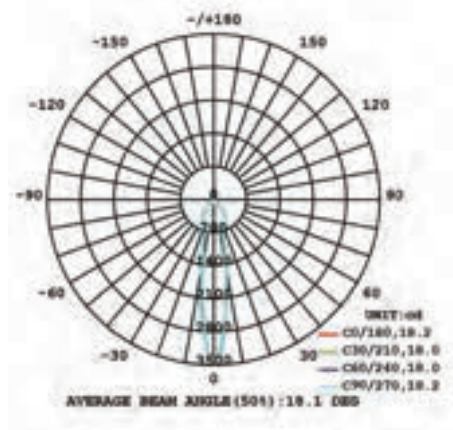

15W 1-LIGHT FIXED MEDIUM CLEAR

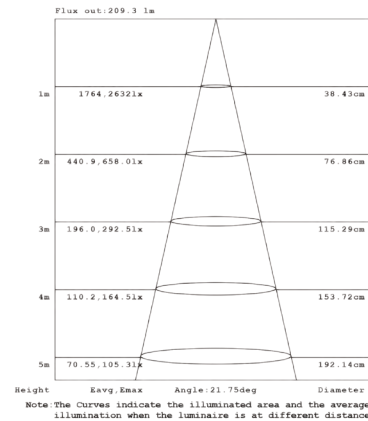
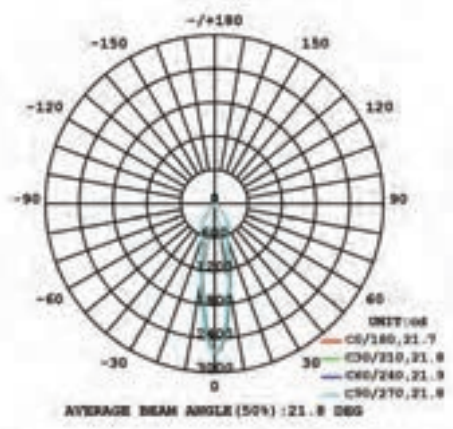


15W 1-LIGHT FIXED WIDE CLEAR

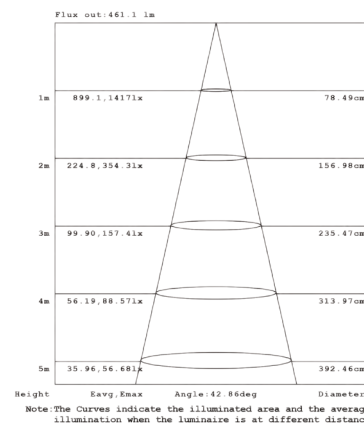
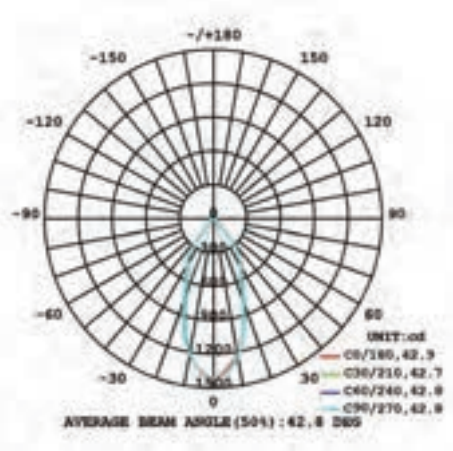


GIMBAL



10W 1-LIGHT GIMBAL NARROW CLEAR

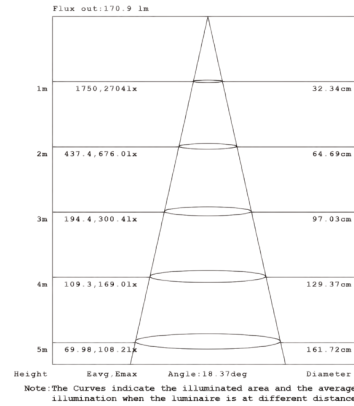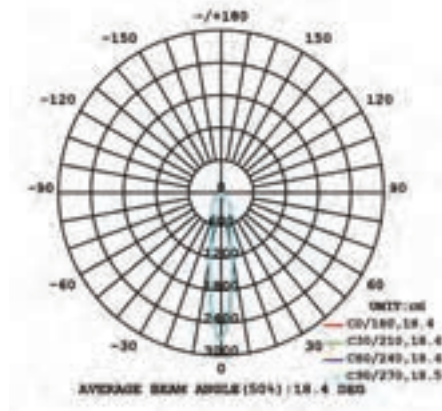

10W 1-LIGHT GIMBAL MEDIUM CLEAR

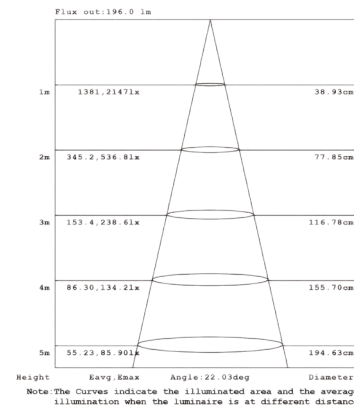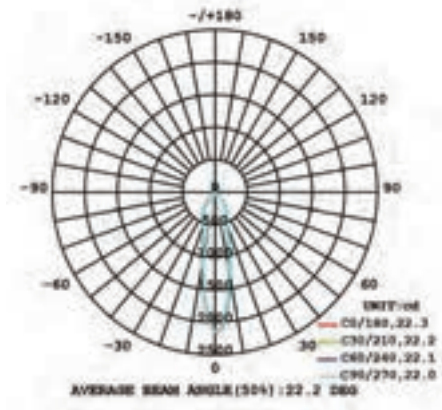


10W 1-LIGHT GIMBAL WIDE CLEAR

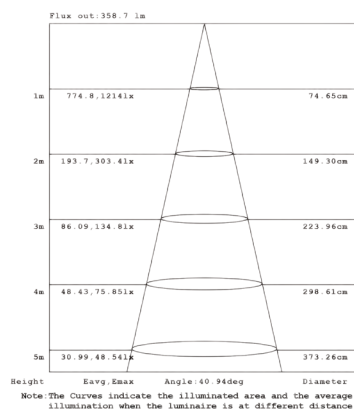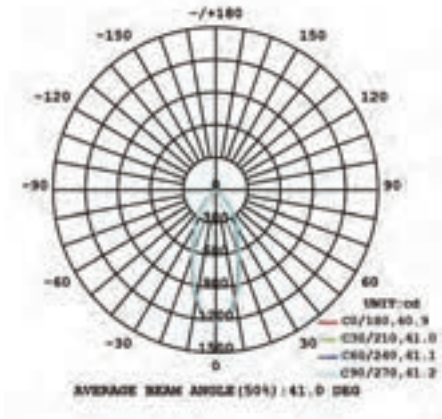


GIMBAL


15W 1-LIGHT GIMBAL NARROW CLEAR

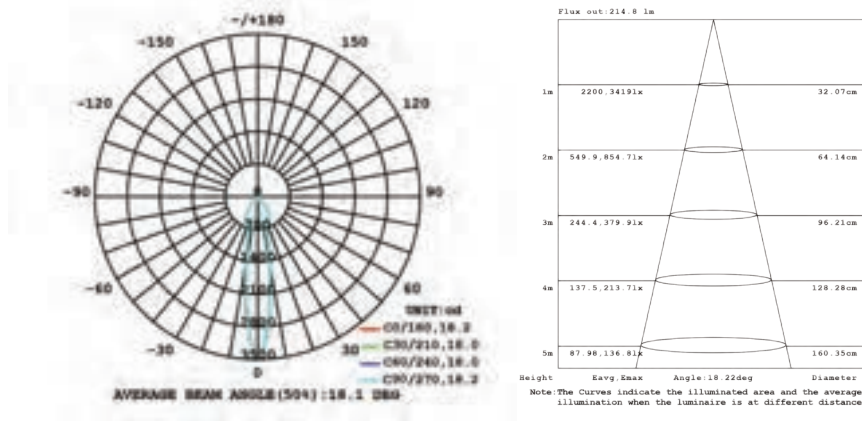

15W 1-LIGHT GIMBAL MEDIUM CLEAR

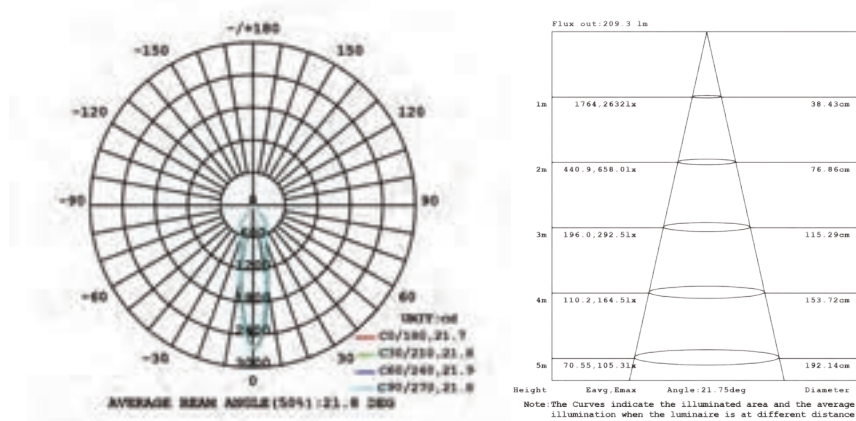


15W 1-LIGHT GIMBAL WIDE CLEAR

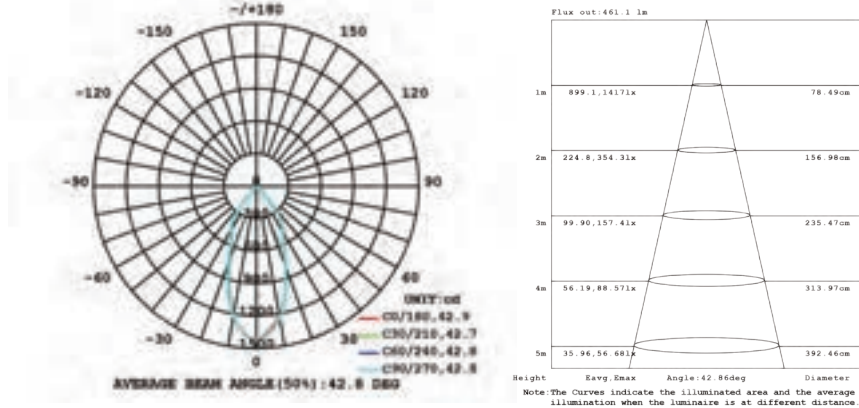


T A N G O

L I G H T P H O T O M E T R I C S


SPOT

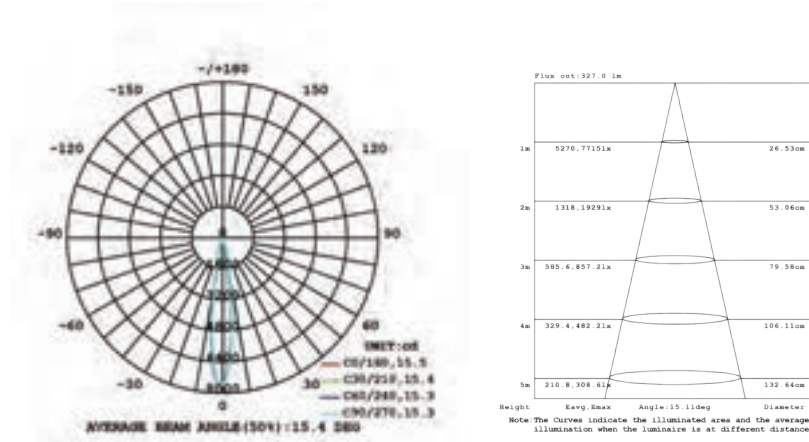


SUSPENSION

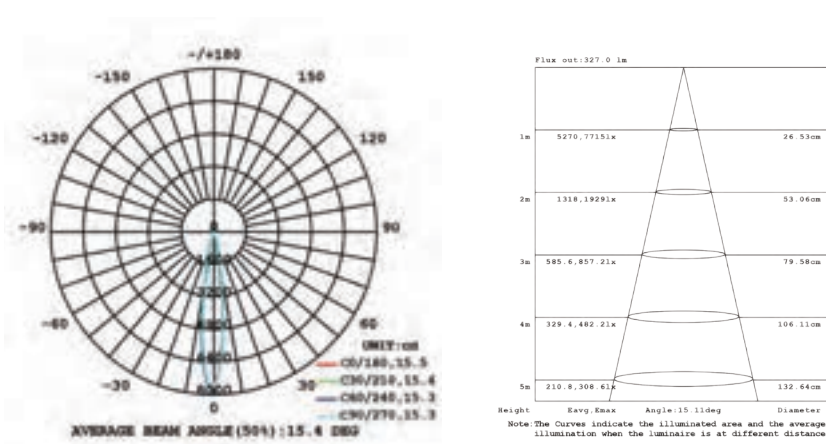




PULL DOWN

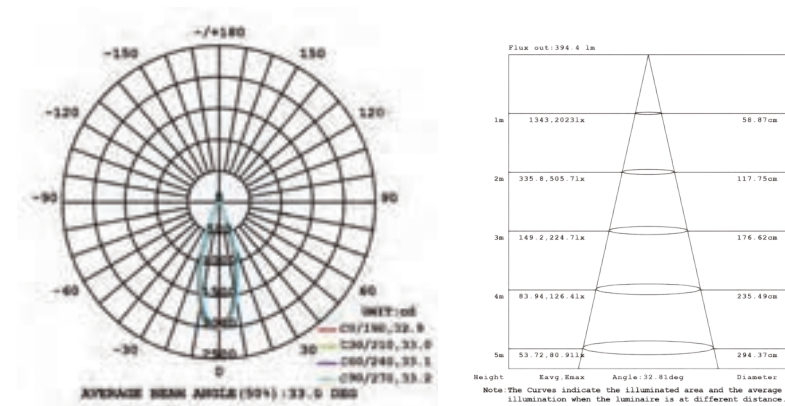

TRIM

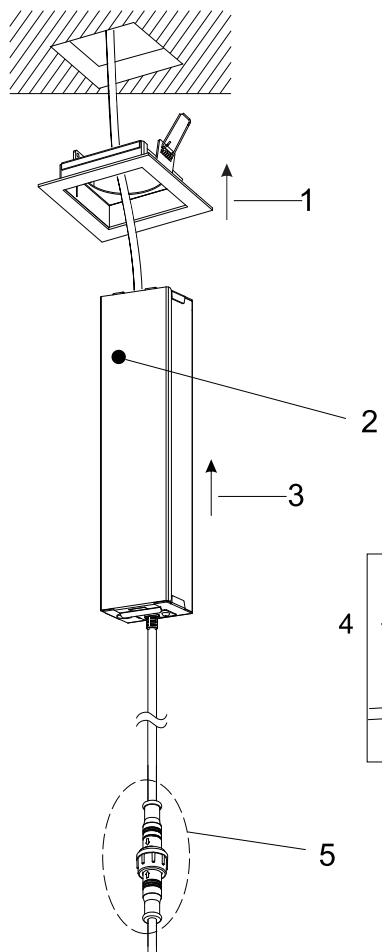

TRIMLESS

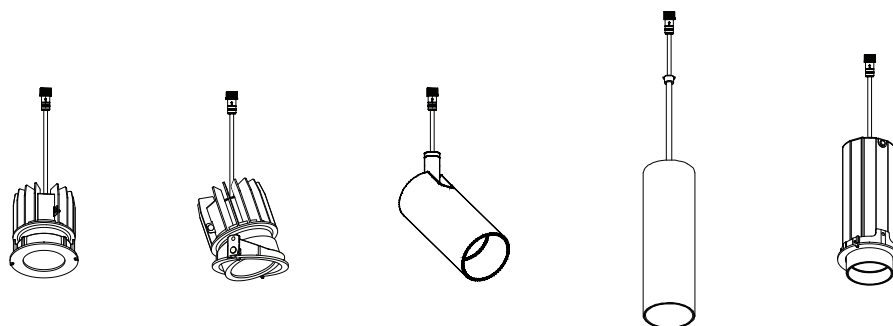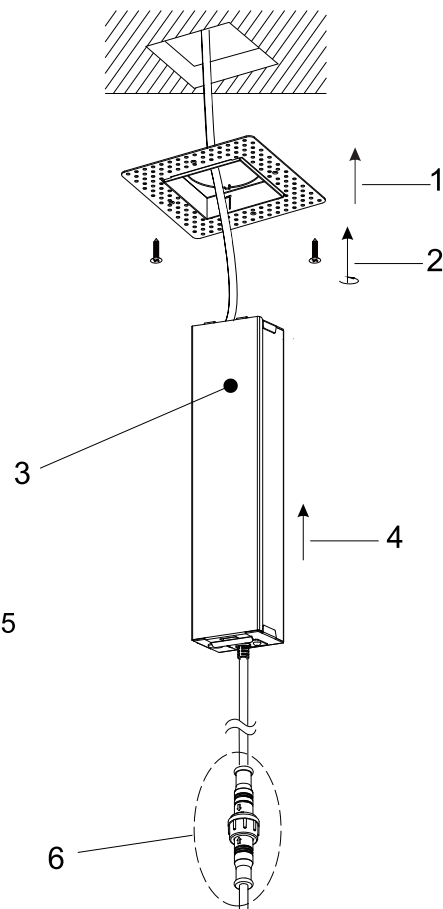





BRAVO

The Bravo family features a contemporary square or rectangular shape. They are aesthetically designed with their predictable lines and slim edges. They are also highly versatile serving dual applications with both surface mount and recessed housings available. Housings are available in 1-, 2-, and 3-light linear configurations. Recessed housings are available in both trim and trimless design. These housings host a variety of different modules designed to achieve various lighting objectives. Modules range in design from traditional downlights to egressed spots or hanging pendants. Light modules have a wide range of ordering options such as color finishes, CCT's and beam angles. Having so many applicable uses the Bravo family can be utilized in a variety of different settings such as residential, retail & hospitality.



LUMINAIRES



COMPLETE BRAVO FIXTURE ORDERING GUIDES

BRAVO SURFACE MOUNT 1-LIGHT / 2-LIGHT / 3-LIGHT	49 - 50
BRAVO RECESSED 1-LIGHT	51 - 52
BRAVO RECESSED 2-LIGHT	53 - 54
BRAVO RECESSED 3-LIGHT	55 - 56

THE
BRAVO
REMIX








2" Bravo LED Fixed Aperture

Shown as square Trimless Fixed

SPECIFICATIONS

Construction:	Aluminum Body, Powder Coated Finish
Wattage:	10W IC Rated, 15W Non-IC Rated
Lumens:	840 Lumens, 1180 Lumens
Power Supply:	ERP Brand, 250mA, 10W or 350mA, 15W Constant Current driver, enclosed in Junction Box with 12" flexible cable to mate to module connector
Light Module:	High output, high efficiency LED COB
Lumen Maintenance:	70%@50,000 hours
CRI:	90+
Input Voltage:	120V-277V
Dimming:	TRIAC/ELV/0-10V
Approval:	Wet
Color Finish Options:	☐ Matte White ☐ Matte Black ☐ Custom
Electrical Approval:	COMPLIANT
Warranty:	

KELVIN OPTIONS




DIM-TO-WARM OPTION (15W)





DIFFUSER OPTIONS




REFLECTOR OPTIONS



ADD-ONS

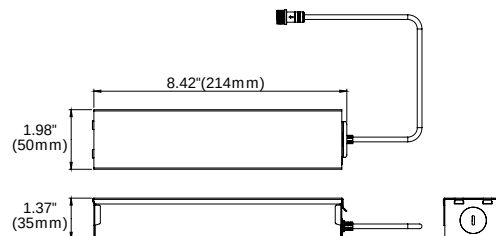


(RECESSED APPLICATION)

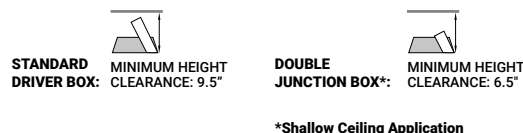

COMPATIBLE SURFACE MOUNT BODIES



COMPATIBLE TRIMS + TRIMLESS MESH PLATES

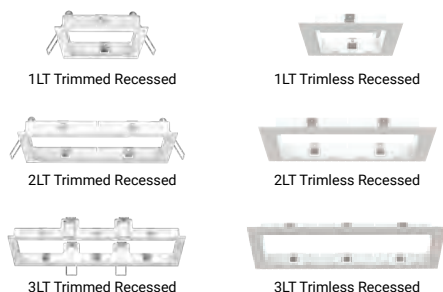

Recessed Trims and Trimless Mesh Plates for remodel application.
New Construction plates and IC boxes found within ordering guide.

COMPLETE BRAVO FIXED ORDERING GUIDES

	1 LT / 2 LT / 3 LT SURFACE MOUNT Ordering Guide	Page 49 - 50
	1 LT RECESSED Ordering Guide	Page 51 - 52
	2 LT RECESSED Ordering Guide	Page 53 - 54
	3 LT RECESSED Ordering Guide	Page 55 - 56





2" Bravo LED Gimbal

Shown as square Trim Gimbal


SPECIFICATIONS

Construction:	Aluminum Body, Powder Coated Finish
Wattage:	10W IC Rated, 15W Non-IC Rated
Lumens:	500 Lumens, 750 Lumens
Power Supply:	ERP Brand, 250mA, 10W or 350mA, 15W Constant Current driver, enclosed in Junction Box with 12" flexible cable to mate to module connector
Light Module:	High output, high efficiency LED COB
Lumen Maintenance:	70% @ 50,000 hours
CRI:	90+
Adjustability:	20°
Input Voltage:	120V-277V
Dimming:	TRIAC/ELV/0-10V
Approval:	Damp
Color Finish Options:	☐ Matte White ☐ Matte Black ☐ Custom
Electrical Approval:	COMPLIANT
Warranty:	

KELVIN OPTIONS




DIM-TO-WARM OPTION (15W)






DIFFUSER OPTIONS




REFLECTOR OPTIONS



ADD-ONS

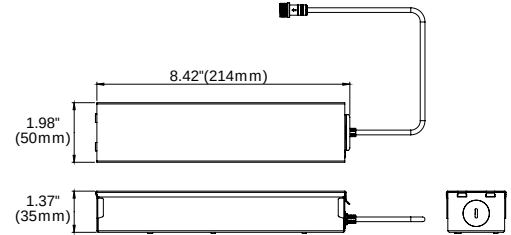

(RECESSED APPLICATION)




*Shallow Ceiling Application

COMPATIBLE SURFACE MOUNT BODIES



COMPATIBLE TRIMS + TRIMLESS MESH PLATES

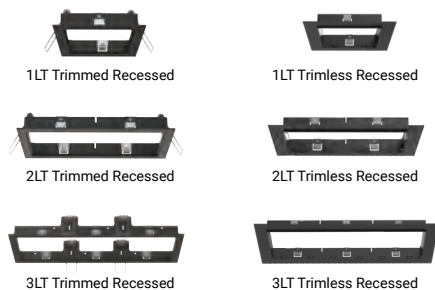

Recessed Trims and Trimless Mesh Plates for remodel application.
New Construction plates and IC boxes found within ordering guide.

COMPLETE BRAVO FIXED ORDERING GUIDES



1 LT / 2 LT / 3 LT **SURFACE MOUNT** Ordering Guide **Page 49 - 50**



1 LT **RECESSED** Ordering Guide **Page 51 - 52**



2 LT **RECESSED** Ordering Guide **Page 53 - 54**



3 LT **RECESSED** Ordering Guide **Page 55 - 56**






2" Bravo LED Snoot Gimbal

Shown as square Trimless Snoot Gimbal

SPECIFICATIONS

Construction:	Aluminum Body, Powder Coated Finish
Wattage:	10W IC Rated, 15W Non-IC Rated
Lumens:	350 Lumens, 520 Lumens
Power Supply:	ERP Brand, 250mA, 10W or 350mA, 15W Constant Current driver, enclosed in Junction Box with 12" flexible cable to mate to module connector
Light Module:	High output, high efficiency LED COB
Lumen Maintenance:	70%@50,000 hours
CRI:	90+
Adjustability:	20°
Input Voltage:	120V-277V
Dimming:	TRIAC/ELV/0-10V
Approval:	Damp
Color Finish Options:	☐ Matte White ☐ Matte Black ☐ Custom
Electrical Approval:	COMPLIANT
Warranty:	

KELVIN OPTIONS



DIM-TO-WARM OPTION (15W)


1800K - 3000K / 785 Lumens






DIFFUSER OPTIONS




REFLECTOR OPTIONS



ADD-ONS

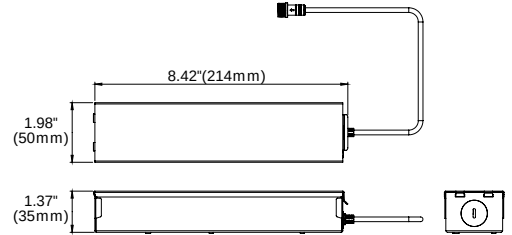

(RECESSED APPLICATION)




*Shallow Ceiling Application

COMPATIBLE SURFACE MOUNT BODIES



COMPATIBLE TRIMS + TRIMLESS MESH PLATES

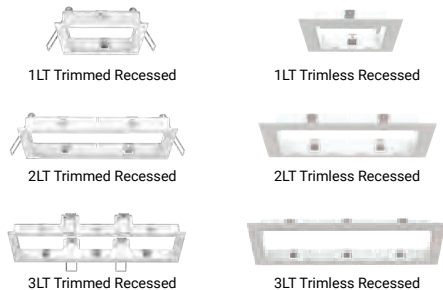

Recessed Trims and Trimless Mesh Plates for remodel application.
New Construction plates and IC boxes found within ordering guide.

COMPLETE BRAVO FIXED ORDERING GUIDES



1 LT / 2 LT / 3 LT **SURFACE MOUNT** Ordering Guide **Page 49 - 50**



1 LT **RECESSED** Ordering Guide **Page 51 - 52**



2 LT **RECESSED** Ordering Guide **Page 53 - 54**





3 LT **RECESSED** Ordering Guide **Page 55 - 56**





Shown as round Trim Suspension

2" Bravo LED Suspension

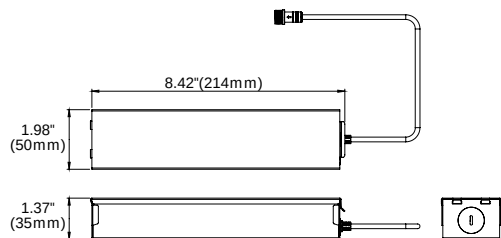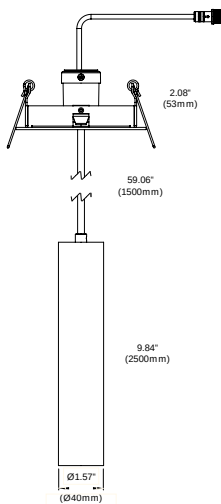

(RECESSED APPLICATION)

STANDARD DRIVER BOX: MINIMUM HEIGHT CLEARANCE: 9.5"


DOUBLE JUNCTION BOX*: MINIMUM HEIGHT CLEARANCE: 6.5"

*Shallow Ceiling Application

SPECIFICATIONS

Construction:	Aluminum Body, Powder Coated Finish
Wattage:	15W IC Rated
Lumens:	830 Lumens
Power Supply:	ERP Brand, 350mA, 15W Constant Current driver, enclosed in Junction Box with 12" flexible cable to mate to module connector
Light Module:	High output, high efficiency LED COB
Lumen Maintenance:	70%@50,000 hours
CRI:	90+
Input Voltage:	120V-277V
Dimming:	TRIAC/ELV/0-10V
Approval:	Damp
Color Finish Options:	☐ Matte White ☒ Matte Black ☐ Custom
Electrical Approval:	
Warranty:	


KELVIN OPTIONS



COMPATIBLE SURFACE MOUNT BODIES




COMPATIBLE TRIMS + TRIMLESS MESH PLATES

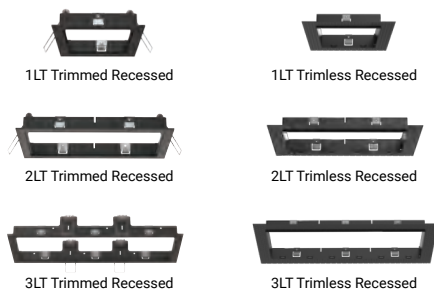

Recessed Trims and Trimless Mesh Plates for remodel application. New Construction plates and IC boxes found within ordering guide.

COMPLETE BRAVO SUSPENSION ORDERING GUIDES

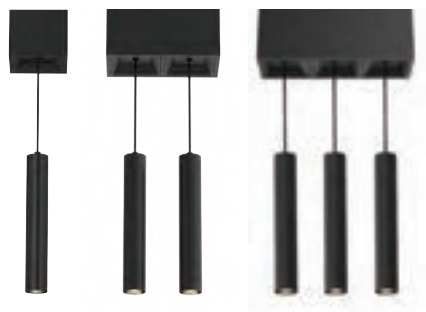

1 LT / 2 LT / 3 LT **SURFACE MOUNT**
Ordering Guide
Page 49 - 50



1 LT **RECESSED**
Ordering Guide
Page 51 - 52



2 LT **RECESSED**
Ordering Guide
Page 53 - 54





3 LT **RECESSED**
Ordering Guide
Page 55 - 56






Shown as square Trimless Spot

2" Bravo LED Spot

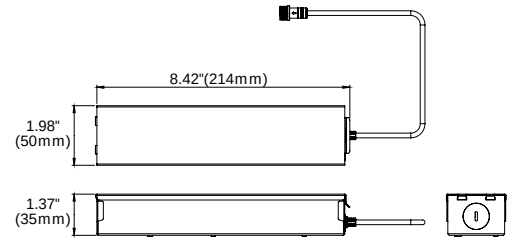

(RECESSED APPLICATION)




*Shallow Ceiling Application



SPECIFICATIONS

Construction:	Aluminum Body, Powder Coated Finish
Wattage:	15W IC Rated
Lumens:	830 Lumens
Power Supply:	ERP Brand, 350mA, 15W Constant Current driver, enclosed in Junction Box with 12" flexible cable to mate to module connector
Light Module:	High output, high efficiency LED COB
Lumen Maintenance:	70%@50,000 hours
CRI:	90+
Adjustability	90°
Input Voltage:	120V-277V
Beam Spread:	Narrow
Dimming:	TRIAC/ELV/0-10V
Approval:	Damp
Color Finish Options:	☐ Matte White ☐ Matte Black ☐ Custom
Electrical Approval:	
Warranty:	

COMPATIBLE SURFACE MOUNT BODIES



COMPATIBLE TRIMS + TRIMLESS MESH PLATES



KELVIN OPTIONS



Recessed Trims and Trimless Mesh Plates for remodel application.
New Construction plates and IC boxes found within ordering guide.

COMPLETE BRAVO SPOT ORDERING GUIDES



1 LT / 2 LT / 3 LT **SURFACE MOUNT**
Ordering Guide
Page 49 - 50



1 LT **RECESSED**
Ordering Guide
Page 51 - 52



2 LT **RECESSED**
Ordering Guide
Page 53 - 54




3 LT **RECESSED**
Ordering Guide
Page 55 - 56





Shown as square Trim Wall Wash

2" Bravo LED Wall Wash

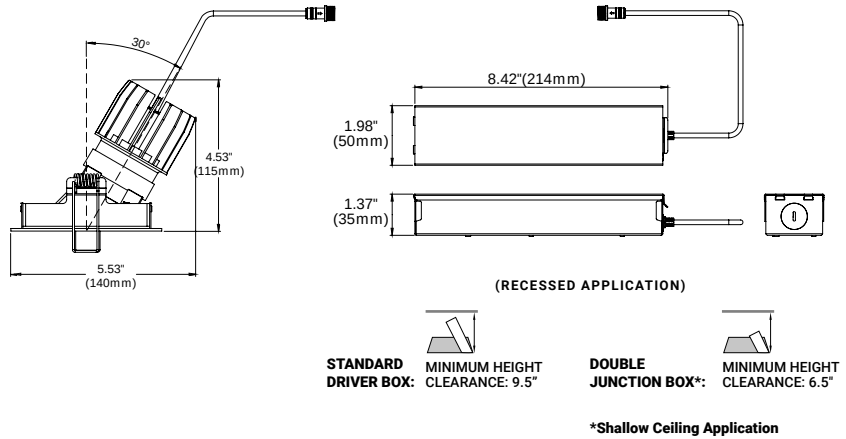

SPECIFICATIONS

Construction:	Aluminum Body, Powder Coated Finish
Wattage:	15W Non-IC Rated
Lumens:	760 Lumens
Power Supply:	ERP Brand, 350mA, 15W Constant Current driver, enclosed in Junction Box with 12" flexible cable to mate to module connector
Light Module:	High output, high efficiency LED COB
Lumen Maintenance:	70%@50,000 hours
CRI:	90+
Input Voltage:	120V-277V
Dimming:	TRIAC/ELV/0-10V
Approval:	Damp
Color Finish Options:	☐ Matte White ☐ Matte Black ☐ Custom
Electrical Approval:	COMPLIANT
Warranty:	


KELVIN OPTIONS



REFLECTOR OPTIONS



COMPATIBLE TRIMS + TRIMLESS MESH PLATES



Recessed Trims and Trimless Mesh Plates for remodel application.
New Construction plates and IC boxes found within ordering guide.

COMPLETE BRAVO WALL WASH ORDERING GUIDES



1 LT **RECESSED** Ordering Guide

Page 51 - 52



2 LT **RECESSED** Ordering Guide

Page 53 - 54



3 LT **RECESSED** Ordering Guide



Page 55 - 56





Shown as square Trim Panel

2" Bravo LED Panel

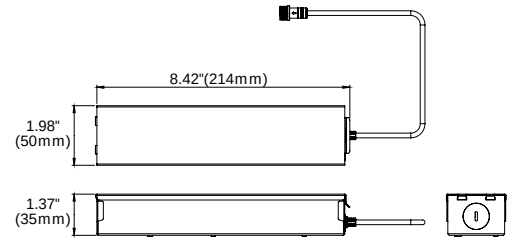

(RECESSED APPLICATION)

STANDARD DRIVER BOX: MINIMUM HEIGHT CLEARANCE: 9.5"

DOUBLE JUNCTION BOX*: MINIMUM HEIGHT CLEARANCE: 6.5"

*Shallow Ceiling Application

SPECIFICATIONS

Construction:	Aluminum Body, Powder Coated Finish
Wattage:	15W Non-IC Rated
Lumens:	630 Lumens
Power Supply:	ERP Brand, 350mA, 15W Constant Current driver, enclosed in Junction Box with 12" flexible cable to mate to module connector
Light Module:	High output, high efficiency LED COB
Lumen Maintenance:	70%@50,000 hours
CRI:	90+
Input Voltage:	120V-277V
Dimming:	TRIAC/ELV/0-10V
Approval:	Damp
Color Finish Options:	☐ Matte White ☐ Matte Black ☐ Custom
Electrical Approval:	COMPLIANT
Warranty:	

KELVIN OPTIONS




REFLECTOR OPTIONS




(W)
100°
Wide

COMPATIBLE SURFACE MOUNT BODIES



COMPATIBLE TRIMS + TRIMLESS MESH PLATES



Recessed Trims and Trimless Mesh Plates for remodel application.
New Construction plates and IC boxes found within ordering guide.

COMPLETE BRAVO PANEL ORDERING GUIDES



1 LT / 2 LT / 3 LT **SURFACE MOUNT** Ordering Guide **Page 49 - 50**



1 LT **RECESSED** Ordering Guide **Page 51 - 52**



2 LT **RECESSED** Ordering Guide **Page 53 - 54**



3 LT **RECESSED** Ordering Guide **Page 55 - 56**



FEATURES

Typically used in environments when there is a low plenum or when there is a concrete ceiling; Bravo Surface Mount fixtures can add dimension or fashionably match your decor space. Bravo Surface Mount fixtures are available in 3 body sizes that can be outfitted with 6 different light modules, and used in various lighting applications and installations.

SPECIFICATIONS

FIXTURE BODY

- 18 gauge powder coated steel body
Aluminum powder coated or painted
- Standard in white or black finish. Other finishes consult factory

MOUNTING

- Mounts over octagon box (sold separately)

POWER SUPPLY

- ERP Brand 120V - 277V input, Constant Current 10W 250mA or 15W 350mA power supply
- Minimum operating temperature: -30°
- Enclosed inside Housing comes with Quick Connect to Light Module
- Dimming: TRIAC, ELV and 0-10V

LIGHT MODULE ★

- High output, high efficiency LED COB
- CRI 90+
- Lumen Maintenance: 70% @ 50,000 hrs
- Recessed Fixed Light module wet listed, all others damp listed
- Recessed Fixed Aperture:
10W IC Rated, 840 Lumens, 15W Non-IC Rated, 1180 Lumens, all CCTs listed available
- Recessed Gimbal:
10W IC Rated, 500 Lumens, 15W Non-IC Rated, 750 Lumens, all CCTs listed available
- Snoot Gimbal:
10W IC Rated, 350 Lumens, 15W Non-IC Rated, 520 Lumens, all CCTs listed available
- Suspension & Spot:
15W IC Rated, 830 Lumens, 3000K or 4000K only
- Panel:
15W Non-IC Rated, 760 Lumens, 3000K or 4000K only
- Dim-to-Warm modules 15W only, Non-IC, CCT Range 1800K to 3000K, 785 Lumens, available with Recessed Fixed Aperture, Recessed Gimbal & Recessed Snoot Gimbal only

REFLECTORS ★

- Recessed Fixed, Recessed Gimbal & Recessed Snoot Gimbal available in Narrow, Medium & Wide
- Suspension & Spot available in Narrow only
- Panel 100°

ELECTRICAL APPROVAL




WARRANTY



2" Bravo LED Surface Mount Ordering Guide

1 SELECT HOUSING

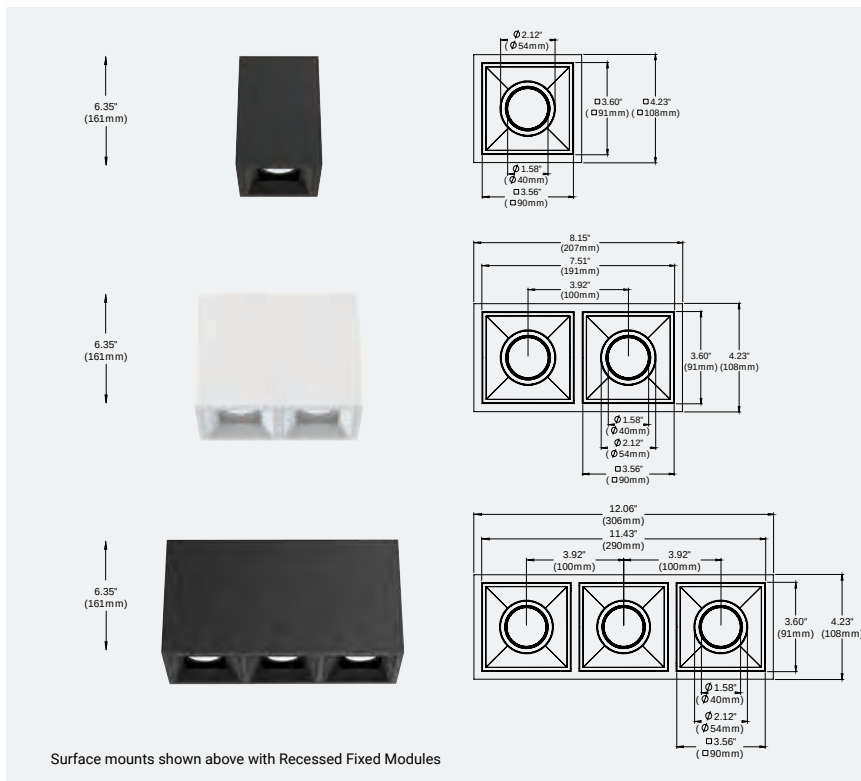


2 SELECT FINISH




★ 3 SELECT LIGHT MODULE 1



4 SELECT LIGHT MODULE 2* *If Applicable

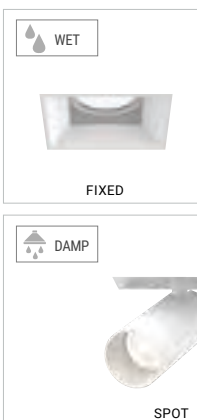

5 SELECT LIGHT MODULE 3* *If Applicable

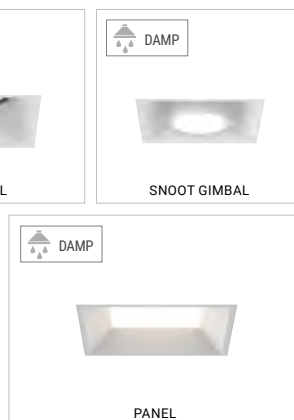

6

SELECT DRIVER / MODULE WATTAGE

10W or 15W



LED Driver Enclosed

Integral Driver,
One per module

FIXED
10W / 15W

GIMBAL
10W / 15W

SNOOT GIMBAL
10W / 15W

SUSPENSION
15W

PANEL
15W

SPOT
15W

7

SELECT CCT

KELVIN OPTIONS

2700K 3000K 3500K 4000K



DIM-TO-WARM OPTION (15W)

1800K - 3000K / 785 Lumens



★ 8

SELECT REFLECTOR


(N)
15°
Narrow

(M)
24°
Medium

(W)
38°
Wide

9

SELECT DIFFUSER



10

ADD-ONS


HONEYCOMB
LOUVRE
(Black ext/int)
HC

ORDERING GUIDE CONFIGURATOR

BVO	S	1	2	3	4	5	6
BRAVO	SURFACE MOUNT	# OF LIGHT	FINISH	LIGHT MODULE 1	LIGHT MODULE 2	LIGHT MODULE 3	WATTAGE
BVO	S	1	1-LIGHT	01 BLACK	RF RECESSED FIXED	RF RECESSED FIXED	10 10W
		2	2-LIGHT	02 WHITE	RG RECESSED GIMBAL	RG RECESSED GIMBAL	15 15W
		3	3-LIGHT		SG RECESSED SNOOT GIMBAL	SG RECESSED SNOOT GIMBAL	
				SU SUSPENSION	SU SUSPENSION	SU SUSPENSION	
				ST SPOT	ST SPOT	ST SPOT	
				PN PANEL	PN PANEL	PN PANEL	

ORDERING GUIDE EXAMPLE 1:

Bravo / Surface Mount / 1-Light / White / Recessed Gimbal / 10 Watt / 3000K / 38° Beam Angle / Clear Diffuser

CODE: **BVO-S-1-02-RG-10-30-W-CL**

ORDERING GUIDE EXAMPLE 2:

Bravo / Surface Mount / 2-Light / Black / Recessed Snoot Gimbal / Recessed Snoot Gimbal / 15 Watt / 3500K / 38° Beam Angle / Clear Diffuser

CODE: **BVO-S-2-01-SGSG-15-35-W-CL**

ORDERING GUIDE EXAMPLE 3:

Bravo / Surface Mount / 3-Light / White / Spot / Spot / Spot / 15 Watt / 3000K

CODE: **BVO-S-3-02-STSTST-15-30**

7	8	9	10
CCT	BEAM ANGLE*	DIFFUSER*	ADD-ONS*
27	N 15°	CL CLEAR	HC HONEYCOMB LOUVRE
30	M 24°	LN LINEAR SPREAD	
35	W 38°	FR FROSTED	
40		SP SOLITE	
DTW* Dim To Warm		RE RED DICHROIC	
		GR GREEN DICHROIC	
		BL BLUE DICHROIC	
		OR ORANGE DICHROIC	

*NOTE: Options 6, 7, 8, 9, 10,
For use with Recessed Fixed (RF), Recessed Gimbal (RG) & Recessed Snoot Gimbal (SG) only

FEATURES

Like a camelion, the Bravo family recessed fixtures are designed to inherently blend into their desired environments. With their clean lined, linear shape, these fixtures are impeccably beautiful in both trim or trimless form. There are three body sizes that can be outfitted with a series of listed modules designed to suit various lighting applications and installations.

SPECIFICATIONS

FIXTURE BODY

- 18 gauge powder coated steel body
Aluminum powder coated trim or mesh plate
- Standard in white or black finish. Other finishes consult factory

 **TRIM CUT HOLE:** 4 1/8" x 4 1/8"

 **TRIMLESS CUT HOLE:** 4 1/8" x 4 1/8"

 **STANDARD DRIVER BOX:** MINIMUM HEIGHT CLEARANCE: 9 1/2"

 **DOUBLE JUNCTION BOX:** MINIMUM HEIGHT CLEARANCE: See preceding modules pages

- Maximum ceiling thickness:

- Trimless: 1 1/2"

- Trim: 1 1/4"

MOUNTING

- Remodel application, new construction plates or IC / Airtight / enclosures sold separately

POWER SUPPLY

- ERP Brand 120V - 277V input, Constant Current 10W 250mA or 15W 350mA power supply
- Thermally protected
- Minimum operating temperature: -30°
- Enclosed Junction box with 12" flexible cable to mate to module connector
- Dimming: TRIAC, ELV and 0-10V

LIGHT MODULE ★

- High output, high efficiency LED COB
- CRI 90+
- Lumen Maintenance: 70% @ 50,000 hrs
- Recessed Fixed Light module wet listed, all others damp listed
- Recessed Fixed Aperture:
10W IC Rated, 840 Lumens, 15W Non-IC Rated, 1180 Lumens, all CCTs listed available
- Recessed Gimbal:
10W IC Rated, 500 Lumens, 15W Non-IC Rated, 750 Lumens, all CCTs listed available
- Snoot Gimbal:
10W IC Rated, 350 Lumens, 15W Non-IC Rated, 520 Lumens, all CCTs listed available
- Suspension & Spot:
15W IC Rated, 830 Lumens, 3000K or 4000K only
- Wall Wash & Panel:
15W Non-IC Rated, 760 Lumens, 3000K or 4000K only
- Dim-to-Warm modules 15W only, Non-IC, CCT Range 1800K to 3000K, 785 Lumens, available with Recessed Fixed Aperture, Recessed Gimbal & Recessed Snoot Gimbal only

REFLECTORS ★

- Recessed Fixed, Recessed Gimbal & Recessed Snoot Gimbal available in Narrow, Medium & Wide
- Spot & Suspension available in Narrow only
- Pull Down 100°
- Wall Wash 75°

ELECTRICAL APPROVAL




WARRANTY



2" Bravo LED 1 LT Ordering Guide


1 SELECT BETWEEN TRIM / TRIMLESS

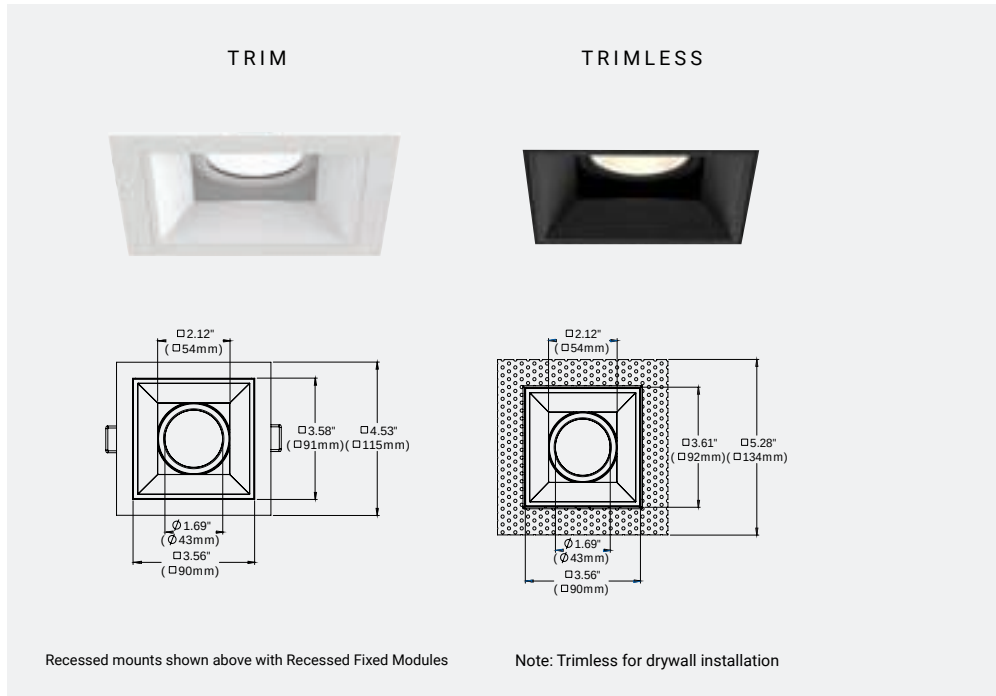

2 SELECT FINISH




★ 3 SELECT LIGHT MODULE 1

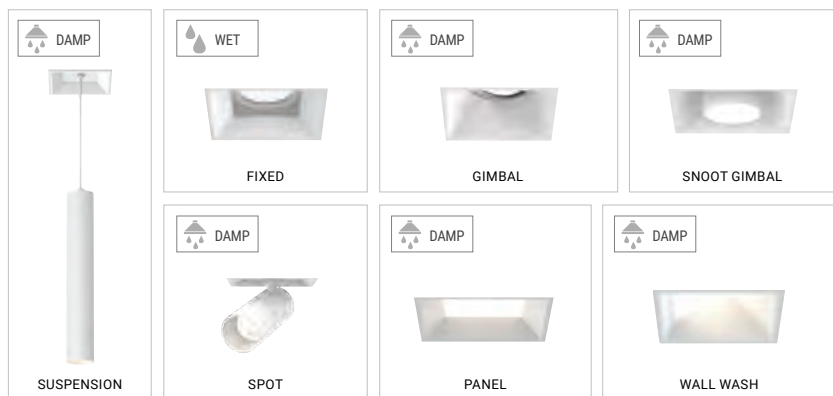

4

SELECT DRIVER / MODULE WATTAGE

10W or 15W

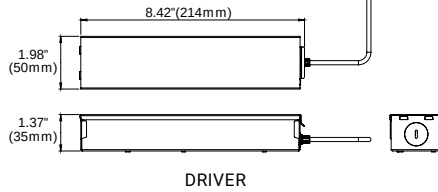


FIXED
10W / 15W



GIMBAL
10W / 15W




SNOOT GIMBAL
10W / 15W



SUSPENSION
15W



WALL WASH
15W



PANEL
15W




SPOT
15W

5

SELECT CCT

KELVIN OPTIONS



DIM-TO-WARM OPTION (15W)

1800K - 3000K / 785 Lumens



6

SELECT REFLECTOR



(N)
15°
Narrow




(M)
24°
Medium



(W)
38°
Wide

7

SELECT DIFFUSER



8

ADD-ONS



EXTENSION
BAFFLE
(Black ext/int)
XT



HONEYCOMB
LOUVRE
(Black ext/int)
HC



DOUBLE JUNCTION BOX
(Shallow Ceiling Application)

ORDERING GUIDE CONFIGURATOR

BVO	R	1	1	2	3		4		5	6	7		8					
BRavo	RECESSED	1-LIGHT	TRIM/ TRIMLESS		FINISH		LIGHT MODULE 1		WATTAGE		CCT	BEAM ANGLE*		DIFFUSER*		ADD-ONS*		
BVO	R	1	T	TRIM	01	BLACK	RF	RECESSED FIXED		10	10W	27	N	15°	CL	CLEAR	XT	EXTENSION BAFFLE
			TL	TRIMLESS	02	WHITE	RG	RECESSED GIMBAL		15	15W	30	M	24°	LN	LINEAR SPREAD	HC	HONEYCOMB LOUVRE
							SG	RECESSED SNOOT GIMBAL				35	W	38°	FR	FROSTED	DJ	DOUBLE JUNCTION BOX
							SU	SUSPENSION				40			SP	SOLITE		
							ST	SPOT				DTW* Dim To Warm			RE	RED DICHROIC		
							WL	WALL WASH						GR	GREEN DICHROIC			
							PN	PANEL						BL	BLUE DICHROIC			
														OR	ORANGE DICHROIC			

ORDERING GUIDE EXAMPLE 1:

Bravo / Recessed Mount / 1-Light / Trim / White / Recessed Fixed / 10 Watt / 3000K / 38° Beam Angle / Clear Diffuser

CODE: **BVO-R-1-T-02-RF-10-30-W-CL**

ORDERING GUIDE EXAMPLE 2:

Bravo / Recessed Mount / 1-Light / Trimless / Black / Recessed Gimbal / 15 Watt / 3500K / 38° Beam Angle / Clear Diffuser

CODE: **BVO-R-1-TL-01-RG-15-25-W-CL**

ORDERING GUIDE EXAMPLE 1:

Bravo / Recessed Mount / 1-Light / Trim / White / Recessed Fixed / 10 Watt / 3000K / 38° Beam Angle / Clear Diffuser

CODE: **BVO-R-1-T-02-RF-10-30-W-CL**

ORDERING GUIDE EXAMPLE 2:

Bravo / Recessed Mount / 1-Light / Trimless / Black / Recessed Gimbal / 15 Watt / 3500K / 38° Beam Angle / Clear Diffuser

CODE: **BVO-R-1-TL-01-RG-15-35-W-CL**


ORDERING GUIDE EXAMPLE 3:

Bravo / Recessed Mount / 1-Light / Trim / White / Spot / 15 Watt / 3000K

CODE: **BVO-R-1-T-02-ST-15-30**

*NOTE: Options 5, 6, 7 & 8, For use with Recessed Fixed (RF), Recessed Gimbal (RG) & Recessed Snoot Gimbal (SG) only


NEW CONSTRUCTION PLATES + IC/AT BOXES



TRIM & TRIMLESS
44360-016

CUT HOLE:


Trim & Trimless: 4 1/8" x 4 1/8"

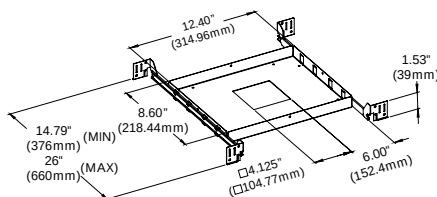

TRIM & TRIMLESS
AT/IC Box: 44367-015
IC Box: 44299-019

CUT HOLE:

Trim & Trimless: 4 1/8" x 4 1/8"

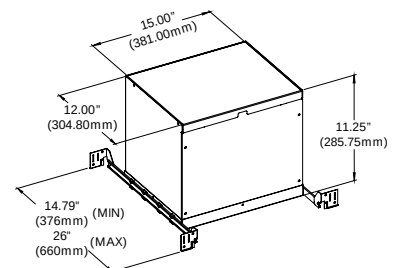

FEATURES

Like a camelion, the Bravo family recessed fixtures are designed to inherently blend into their desired environments. With their clean lined, linear shape, these fixtures are impeccably beautiful in both trim or trimless form. There are three body sizes that can be outfitted with a series of listed modules designed to suit various lighting applications and installations.

SPECIFICATIONS

FIXTURE BODY

- 18 gauge powder coated steel body
Aluminum powder coated trim or mesh plate
- Standard in white or black finish. Other finishes consult factory

 **TRIM CUT HOLE:** 7 5/8" x 4 1/8"

 **TRIMLESS CUT HOLE:** 7 5/8" x 4 1/8"

 **STANDARD DRIVER BOX:** MINIMUM HEIGHT CLEARANCE: 9 1/2"

 **DOUBLE JUNCTION BOX:** MINIMUM HEIGHT CLEARANCE: See preceding modules pages

• Maximum ceiling thickness:

- Trimless: 1 1/2"

- Trim: 1 1/4"

MOUNTING

- Remodel application, new construction plates or IC / Airtight / enclosures sold separately

POWER SUPPLY

- 2 x ERP Brand 120V - 277V input, Constant Current 10W 250mA or 15W 350mA power supply per light module
- Thermally protected
- Minimum operating temperature: -30°
- Enclosed Junction box with 12" flexible cable to mate to module connector
- Dimming: TRIAC, ELV and 0-10V

LIGHT MODULE ★

- High output, high efficiency LED COB
- CRI 90+
- Lumen Maintenance: 70% @ 50,000 hrs
- Recessed Fixed Light module wet listed, all others damp listed
- Recessed Fixed Aperture:
10W IC Rated, 840 Lumens, 15W Non-IC Rated, 1180 Lumens, all CCTs listed available
- Recessed Gimbal:
10W IC Rated, 500 Lumens, 15W Non-IC Rated, 750 Lumens, all CCTs listed available
- Snoot Gimbal:
10W IC Rated, 350 Lumens, 15W Non-IC Rated, 520 Lumens, all CCTs listed available
- Suspension & Spot:
15W IC Rated, 830 Lumens, 3000K or 4000K only
- Wall Wash & Panel:
15W Non-IC Rated, 760 Lumens, 3000K or 4000K only
- Dim-to-Warm modules 15W only, Non-IC, CCT Range 1800K to 3000K, 785 Lumens, available with Recessed Fixed Aperture, Recessed Gimbal & Recessed Snoot Gimbal only

REFLECTORS ★

- Recessed Fixed, Recessed Gimbal & Recessed Snoot Gimbal available in Narrow, Medium & Wide
- Spot & Suspension available in Narrow only
- Pull Down 100°
- Wall Wash 75°

ELECTRICAL APPROVAL




WARRANTY



2" Bravo LED 2 LT Ordering Guide

1 SELECT BETWEEN TRIM / TRIMLESS

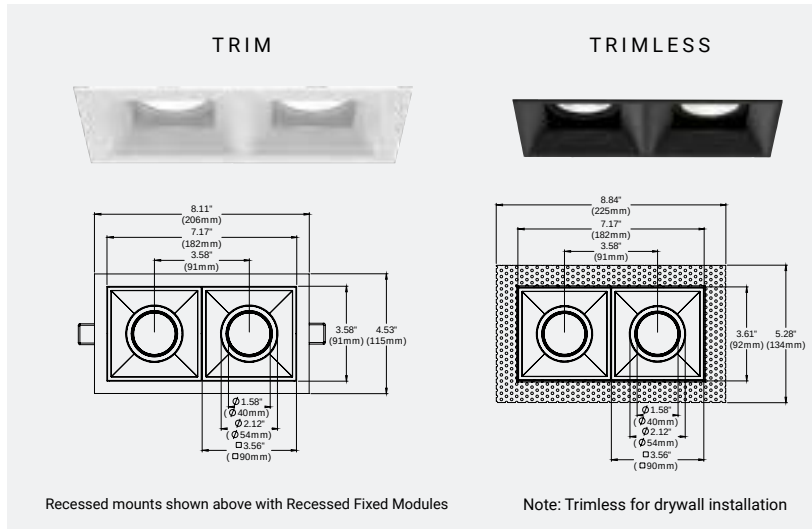


2 SELECT FINISH




★ 3 SELECT LIGHT MODULE 1



4 SELECT LIGHT MODULE 2

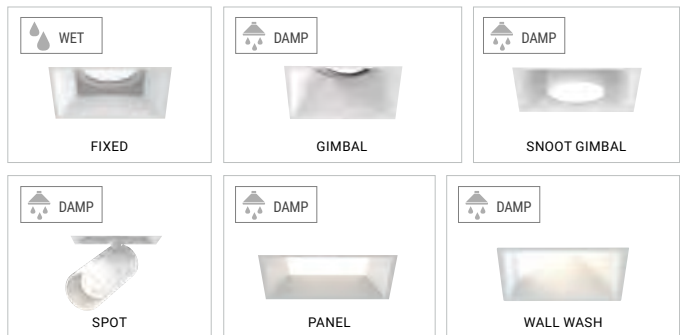

5 SELECT DRIVER / MODULE WATTAGE 10W or 15W (One Driver per module)

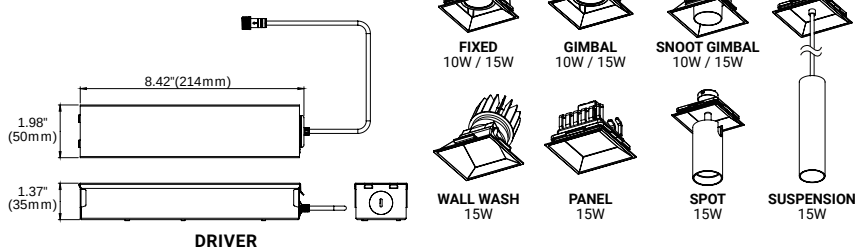

SELECT CCT

2700K 3000K 3500K 4000K

1800K - 3000K / 785 Lumens



SELECT REFLECTOR



(N)
15°
Narrow



(M)
24°
Medium



(W)
38°
Wide

SELECT DIFFUSER



9

ADD-ONS



**EXTENSION
BAFFLE**
(Black ext/int)
XT



**HONEYCOMB
LOUVRE**
(Black ext/int)
HC



DOUBLE JUNCTION BOX (Shallow Ceiling Application)

ORDERING GUIDE CONFIGURATOR

BVO	R	2	1		2		3		4		5		6	
BRAVO	RECESSED	2-LIGHT	TRIM/TRIMLESS		FINISH		LIGHT MODULE 1		LIGHT MODULE 2		WATTAGE		CCT	
BVO	R	2	T	TRIM	01	BLACK	RF	RECESSED FIXED	RF	RECESSED FIXED	10	10W	27	
			TL	TRIMLESS	02	WHITE	RG	RECESSED GIMBAL	RG	RECESSED GIMBAL	15	15W	30	
						SG	RECESSED SNOOT GIMBAL	SG	RECESSED SNOOT GIMBAL				35	
						SU	SUSPENSION	SU	SUSPENSION				40	
						ST	SPOT	ST	SPOT				DTW* Dim To Warm	
						WL	WALL WASH	WL	WALL WASH					
						PN	PANEL	PN	PANEL					
7		8		9										
BEAM ANGLE*		DIFFUSER*		ADD-ONS*										
N	15°	CL	CLEAR	XT	EXTENSION BAFFLE									
M	24°	LN	LINEAR SPREAD	HC	HONEYCOMB LOUVRE									
W	38°	FR	FROSTED	DJ	DOUBLE JUNCTION BOX									
		SP	SOLITE											
		RE	RED DICHROIC											
		GR	GREEN DICHROIC											
		BL	BLUE DICHROIC											
		OR	ORANGE DICHROIC											

ORDERING GUIDE EXAMPLE 1:

Bravo / Recessed Mount / 2-Light / Trim / White / Recessed Fixed / Recessed Gimbal / 10 Watt / 3000K / 38° Beam Angle / Clear Diffuser

CODE: **BVO-R-2-T-02-RFRG-10-30-W-CL**

ORDERING GUIDE EXAMPLE 2:

Bravo / Recessed Mount / 2-Light / Trimless / Black / Spot / Suspension / 15 Watt / 3500K / 15° Beam Angle / Clear Diffuser

CODE: **BVO-R-2-TL-01-STSU-15-30-B-CL**

Bravo / Recessed Mount / 2-Light / Trim / White / Recessed Fixed /
Recessed Gimbal / 10 Watt / 3000K / 38° Beam Angle / Clear Diffuser

CODE: BVO-R-2-T-02-RFRG-10-30-W-CL

Bravo / Recessed Mount / 2-Light / Trimless / Black / Spot /
Suspension / 15 Watt / 3500K / 15° Beam Angle / Clear Diffuser

CODE: **BVO-R-2-TL-01-STSU-15-30-B-CL**

Bravo / Recessed Mount / 2-Light / Trim / White / Wall Wash /
Wall Wash / 15 Watt / 3000K

CODE: **BVO-R-2-T-02-WLWL-15-30**


***NOTE: Options 6, 7, 8 & 9,
For use with Recessed Fixed (RF), Recessed Gimbal (RG)
& Recessed Snoot Gimbal (SG) only**

NEW CONSTRUCTION PLATES + IC/AT BOXES




TRIM & TRIMLESS
44361-013

Trim & Trimless: 7 5/8" x 4 1/8"

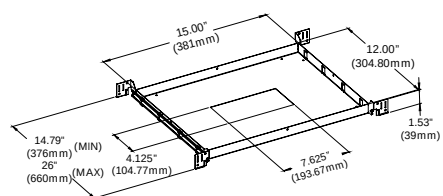

TRIM & TRIMLESS
AT/IC Box: 44364-014
IC Box: 44363-017

CUT HOLE:
Trim & Trimless: 7 5/8" x 4 1/8"

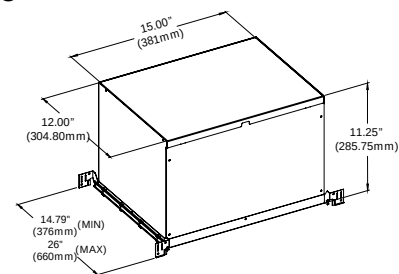

BRAVO

Architectural Recessed / Recessed Mount Fixture

FEATURES

Like a camelion, the Bravo family recessed fixtures are designed to inherently blend into their desired environments. With their clean lined, linear shape, these fixtures are impeccably beautiful in both trim or trimless form. There are three body sizes that can be outfitted with a series of listed modules designed to suit various lighting applications and installations.

SPECIFICATIONS

FIXTURE BODY

- 18 gauge powder coated steel body
Aluminum powder coated trim or mesh plate
- Standard in white or black finish. Other finishes consult factory

 **TRIM CUT HOLE:** 11 1/4" x 4 1/8"

 **TRIMLESS CUT HOLE:** 11 1/4" x 4 1/8"

 **STANDARD DRIVER BOX:** MINIMUM HEIGHT CLEARANCE: 9 1/2"

 **DOUBLE JUNCTION BOX:** MINIMUM HEIGHT CLEARANCE: See preceding modules pages

- Maximum ceiling thickness:
 - Trimless: 1 1/2"
 - Trim: 1 1/4"

MOUNTING

- Remodel application, new construction plates or IC / Airtight / enclosures sold separately

POWER SUPPLY

- 3 x ERP Brand 120V - 277V input, Constant Current 10W 250mA or 15W 350mA power supply per light module
- Thermally protected
- Minimum operating temperature: -30°
- Enclosed Junction box with 12" flexible cable to mate to module connector
- Dimming: TRIAC, ELV and 0-10V

LIGHT MODULE ★

- High output, high efficiency LED COB
- CRI 90+
- Lumen Maintenance: 70% @ 50,000 hrs
- Recessed Fixed Light module wet listed, all others damp listed
- Recessed Fixed Aperture:
 - 10W IC Rated, 840 Lumens, 15W Non-IC Rated, 1180 Lumens, all CCTs listed available
- Recessed Gimbal:
 - 10W IC Rated, 500 Lumens, 15W Non-IC Rated, 750 Lumens, all CCTs listed available
- Snoot Gimbal:
 - 10W IC Rated, 350 Lumens, 15W Non-IC Rated, 520 Lumens, all CCTs listed available
- Suspension & Spot:
 - 15W IC Rated, 830 Lumens, 3000K or 4000K only
- Wall Wash & Panel:
 - 15W Non-IC Rated, 760 Lumens, 3000K or 4000K only
- Dim-to-Warm modules 15W only, Non-IC, CCT Range 1800K to 3000K, 785 Lumens, available with Recessed Fixed Aperture, Recessed Gimbal & Recessed Snoot Gimbal only

REFLECTORS ★

- Recessed Fixed, Recessed Gimbal & Recessed Snoot Gimbal available in Narrow, Medium & Wide
- Spot & Suspension available in Narrow only
- Pull Down 100°
- Wall Wash 75°

ELECTRICAL APPROVAL




WARRANTY



2" Bravo LED 3 LT Ordering Guide

1 SELECT BETWEEN TRIM / TRIMLESS

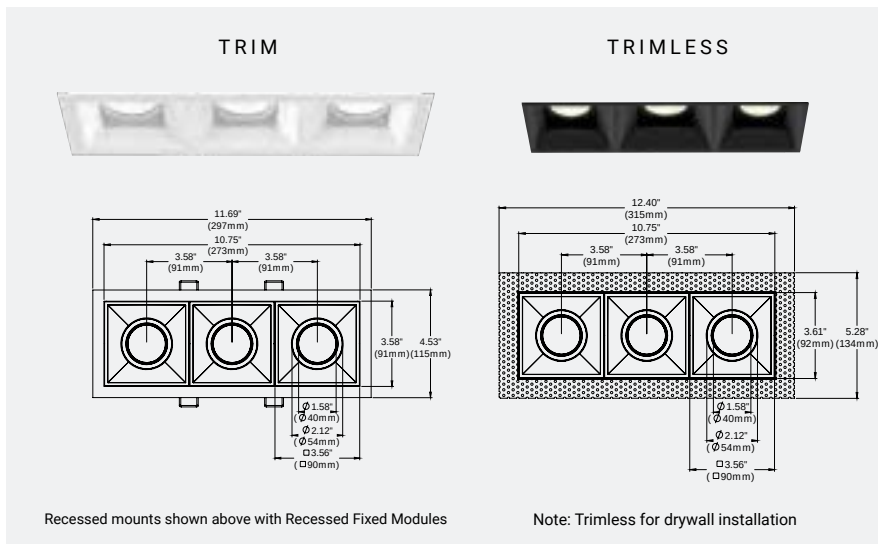


2 SELECT FINISH



★ 3 SELECT LIGHT MODULE 1



4 SELECT LIGHT MODULE 2




5 SELECT LIGHT MODULE 3



6 SELECT DRIVER / MODULE WATTAGE

10W or 15W
(One Driver per module)

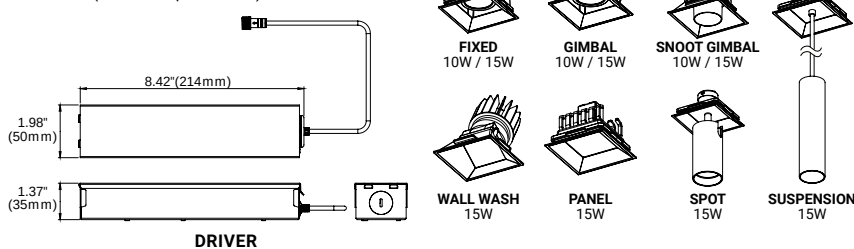

7 SELECT CCT

KELVIN OPTIONS

2700K 3000K 3500K 4000K

DIM-TO-WARM OPTION (15W)

1800K - 3000K / 785 Lumens

8 SELECT REFLECTOR

(N) 15° Narrow

(M) 24° Medium

(W) 38° Wide

9 SELECT DIFFUSER

Clear Lens (CL)

Linear Spread Lens (LN)

Frosted Lens (FR)

Solite Lens (SP)

Red Dichroic (RE)

Green Dichroic (GR)

Blue Dichroic (BL)

Orange Dichroic (OR)

10 ADD-ONS

EXTENSION BAFFLE (Black ext/int) XT

HONEYCOMB LOUVRE (Black ext/int) HC

DOUBLE JUNCTION BOX (Shallow Ceiling Application)

ORDERING GUIDE CONFIGURATOR

BVO	R	3	1	2	3	4	5
BRavo	RECESSED	3-LIGHT	TRIM/ TRIMLESS	FINISH	LIGHT MODULE 1	LIGHT MODULE 2	LIGHT MODULE 2
BVO	R	3	T TRIM	01 BLACK	RF RECESSED FIXED	RF RECESSED FIXED	RF RECESSED FIXED
			TL TRIMLESS	02 WHITE	RG RECESSED GIMBAL	RG RECESSED GIMBAL	RG RECESSED GIMBAL
					SG RECESSED SNOOT GIMBAL	SG RECESSED SNOOT GIMBAL	SG RECESSED SNOOT GIMBAL
					SU SUSPENSION	SU SUSPENSION	SU SUSPENSION
					ST SPOT	ST SPOT	ST SPOT
					WL WALL WASH	WL WALL WASH	WL WALL WASH
					PN PANEL	PN PANEL	PN PANEL

6	7	8	9	10
WATTAGE	CCT	BEAM ANGLE*	DIFFUSER*	ADD-ONS*
10 10W	27	N 15°	CL CLEAR	XT EXTENSION BAFFLE
15 15W	30	M 24°	LN LINEAR SPREAD	HC HONEYCOMB LOUVRE
	35	W 38°	FR FROSTED	DJ DOUBLE JUNCTION BOX
	40		SP SOLITE	
	DTW* Dim To Warm		RE RED DICHROIC	
			GR GREEN DICHROIC	
			BL BLUE DICHROIC	
			OR ORANGE DICHROIC	

ORDERING GUIDE EXAMPLE 1:

Bravo / Recessed Mount / 3-Light / Trim / White / Recessed Fixed / Recessed Snoot Gimbal / Recessed Fixed / 15 Watt / 4000K / 38° Beam Angle / Frosted Diffuser

CODE: BVO-R-3-T-02-RFRGRF-15-40-W-FR

ORDERING GUIDE EXAMPLE 2:

Bravo / Recessed Mount / 3-Light / Trimless / White / Suspension / Spot / Suspension / 15 Watt / 3000K

CODE: BVO-R-3-TL-02-SUSTSU-15-30



ORDERING GUIDE EXAMPLE 3:

Bravo / Recessed Mount / 3-Light / Trim / Black / Spot / Wall Wash / Spot / 15 Watt / 3000K

CODE: BVO-R-3-T-01-STWLST-15-30



***NOTE: Options 7, 8, 9 & 10,**
For use with Recessed Fixed (RF), Recessed Gimbal (RG) & Recessed Snoot Gimbal (SG) only

NEW CONSTRUCTION PLATES + IC/AT BOXES

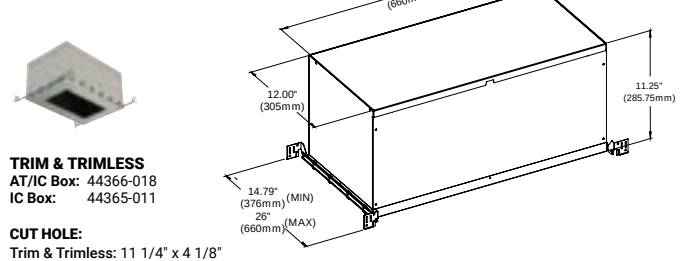
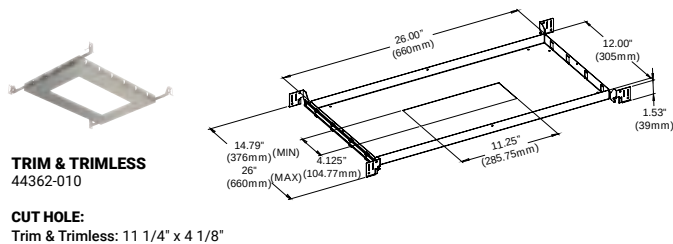


FIXED APERTURE



10W 1-LIGHT FIXED NARROW CLEAR

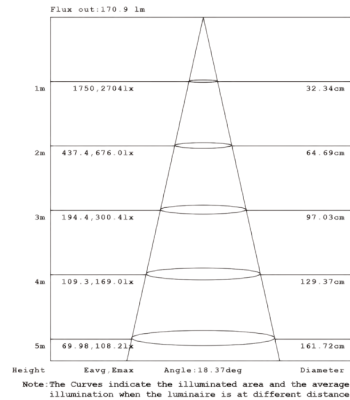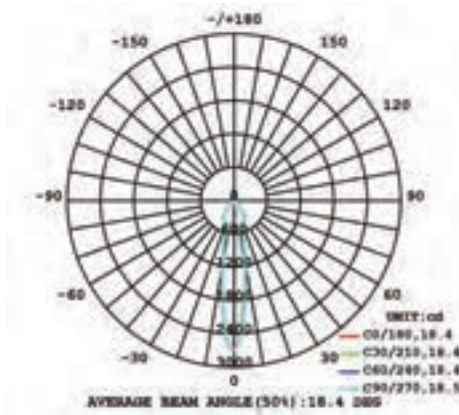

10W 1-LIGHT FIXED MEDIUM CLEAR

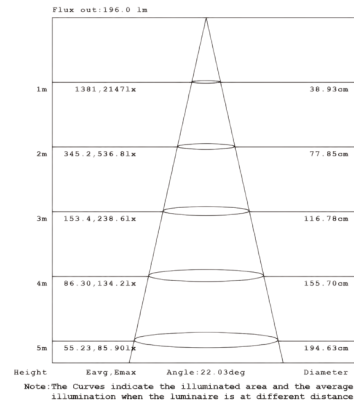
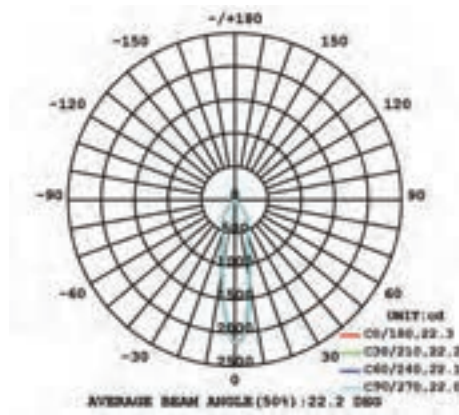


10W 1-LIGHT FIXED WIDE CLEAR

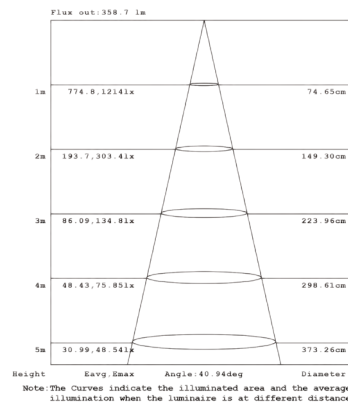
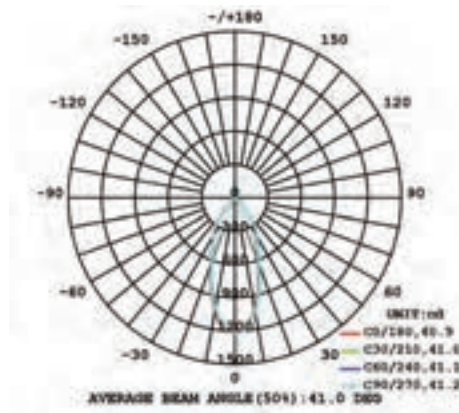


FIXED APERTURE



15W 1-LIGHT FIXED NARROW CLEAR

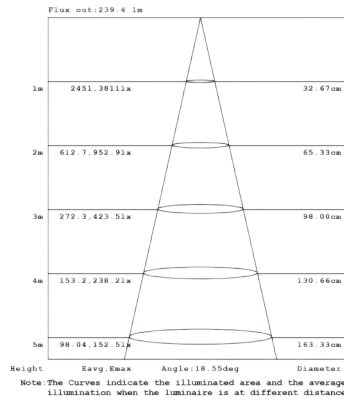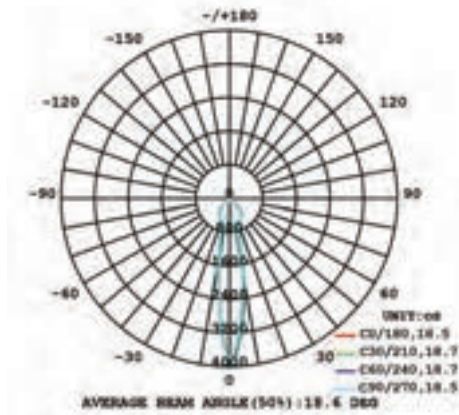

15W 1-LIGHT FIXED MEDIUM CLEAR

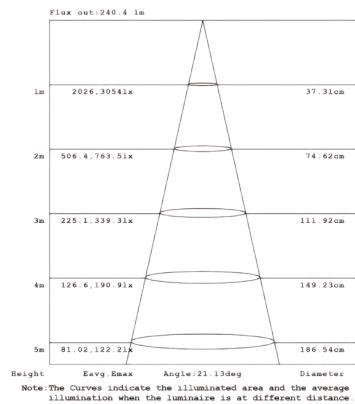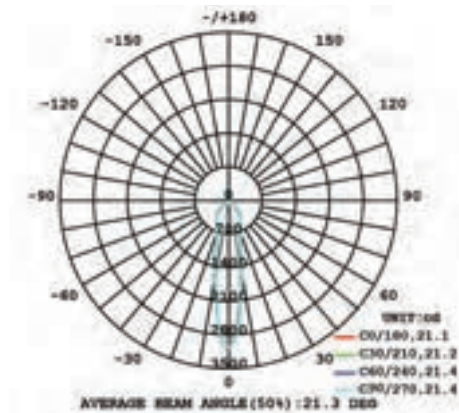


15W 1-LIGHT FIXED WIDE CLEAR

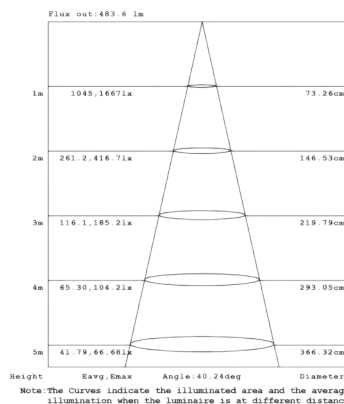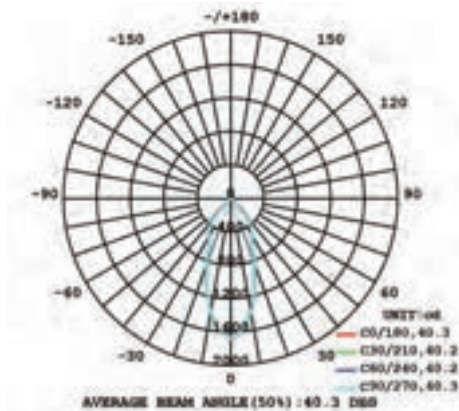


G I M B A L


10W 1-LIGHT GIMBAL NARROW CLEAR

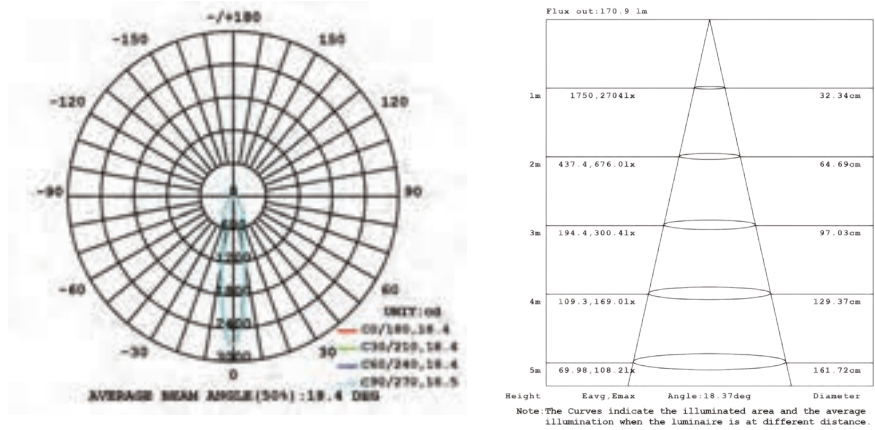

10W 1-LIGHT GIMBAL MEDIUM CLEAR


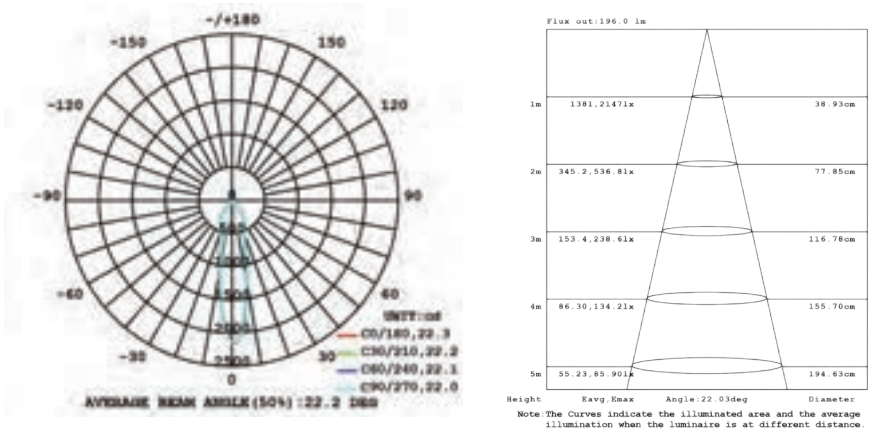


10W 1-LIGHT GIMBAL WIDE CLEAR


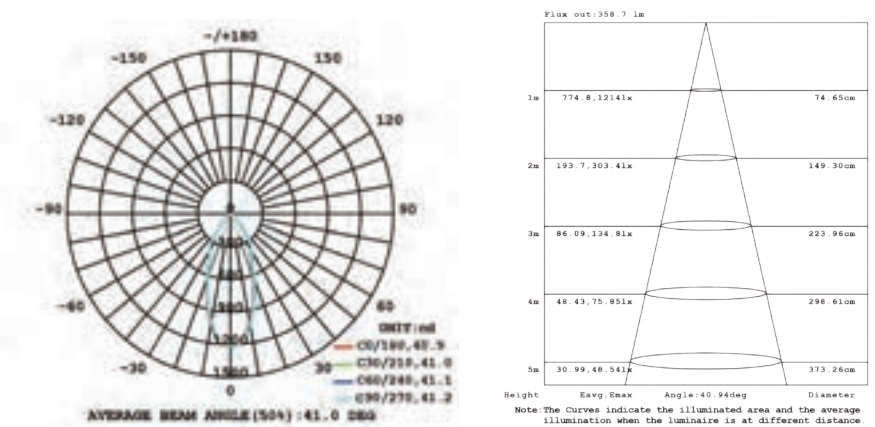


G I M B A L



15W 1-LIGHT GIMBAL NARROW CLEAR

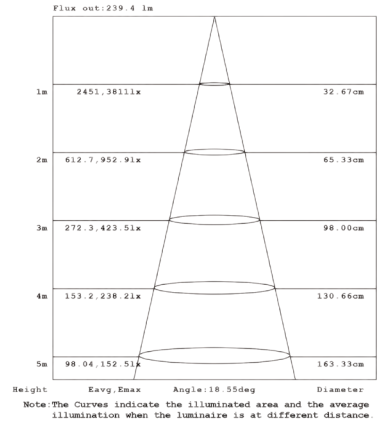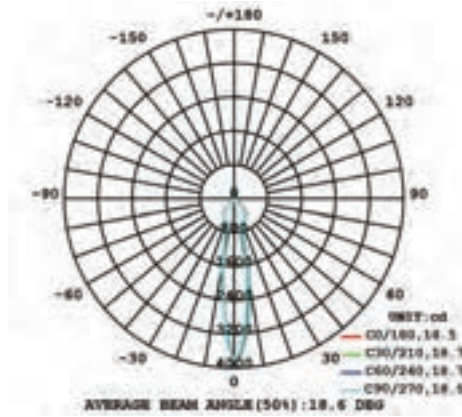

15W 1-LIGHT GIMBAL MEDIUM CLEAR

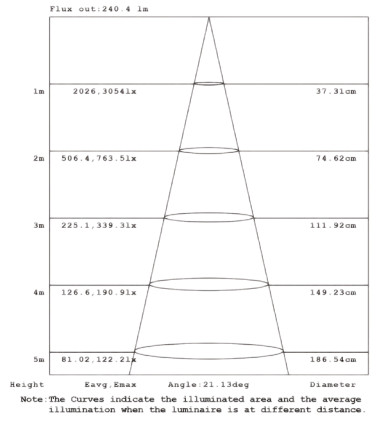
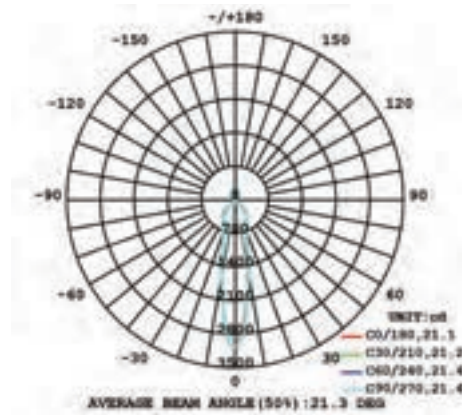


15W 1-LIGHT GIMBAL WIDE CLEAR

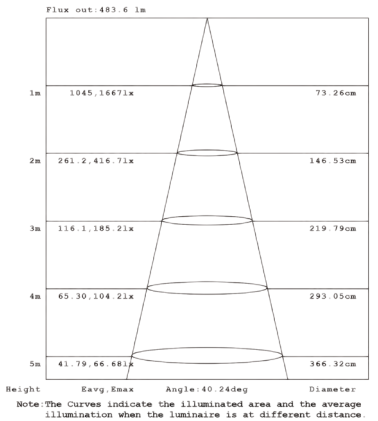
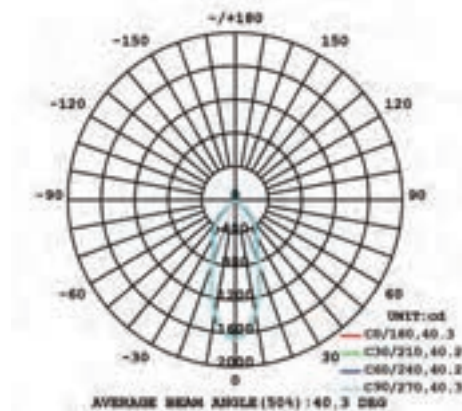


S N O O T G I M B A L



10W 1-LIGHT SNOOT GIMBAL NARROW CLEAR

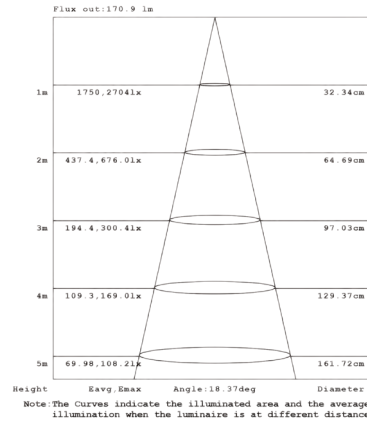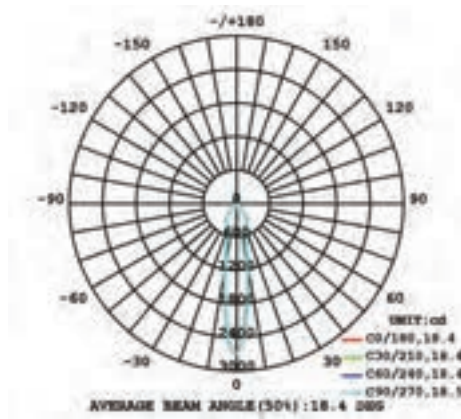

10W 1-LIGHT SNOOT GIMBAL MEDIUM CLEAR

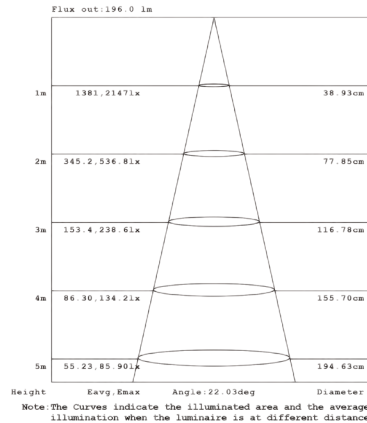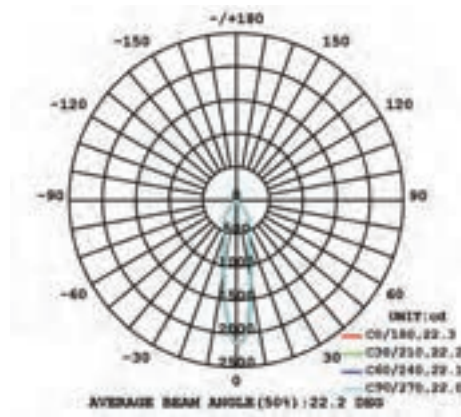


10W 1-LIGHT SNOOT GIMBAL WIDE CLEAR

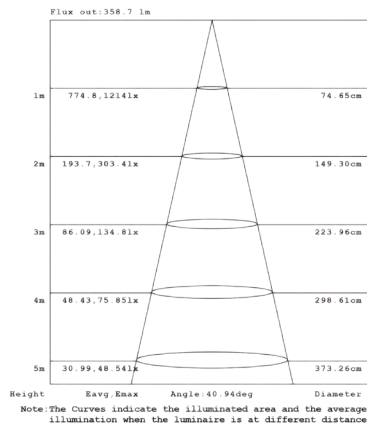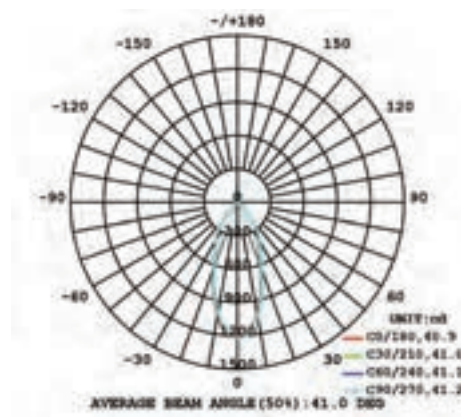


S N O O T G I M B A L


15W 1-LIGHT SNOOT GIMBAL NARROW CLEAR

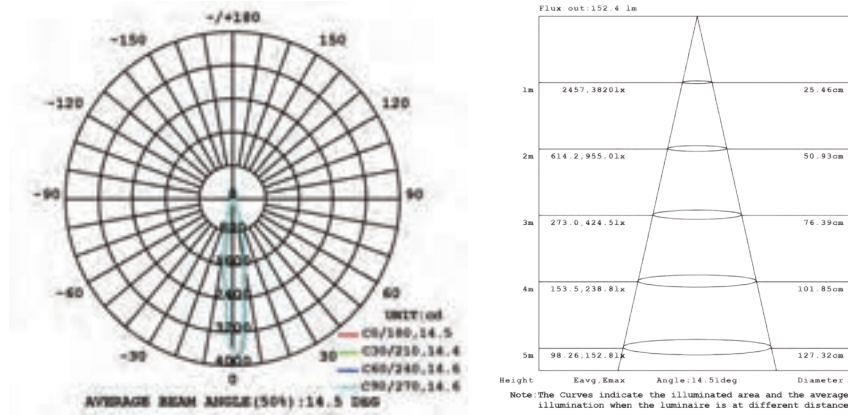

15W 1-LIGHT SNOOT GIMBAL MEDIUM CLEAR

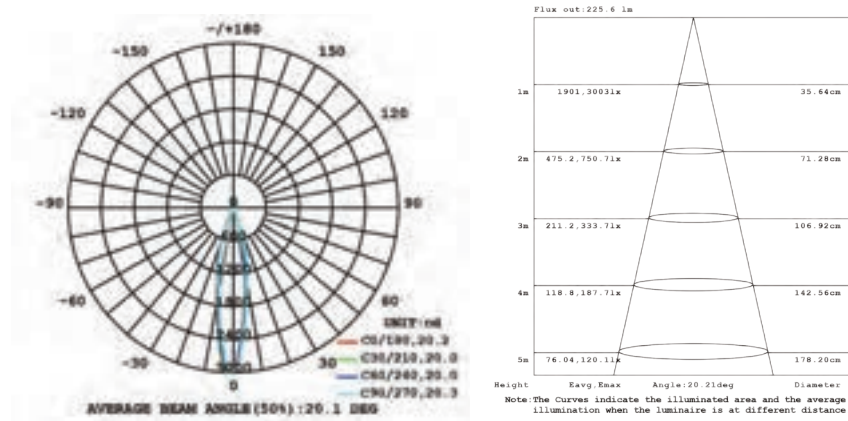



15W 1-LIGHT SNOOT GIMBAL WIDE CLEAR

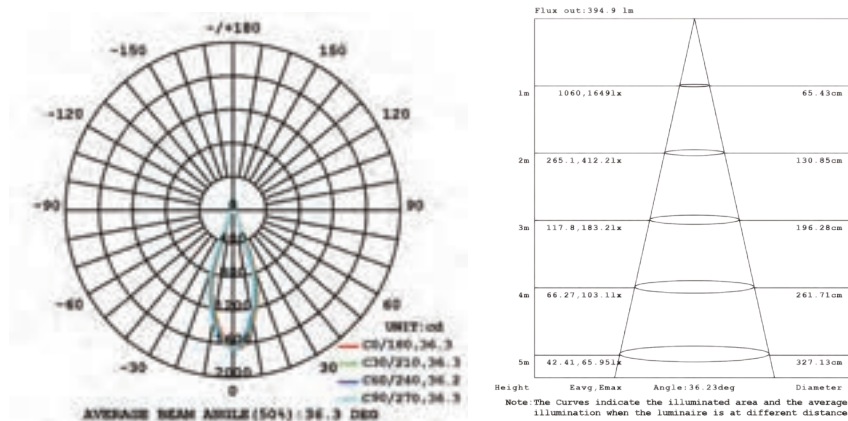



B R A V O

L I G H T P H O T O M E T R I C S

S U S P E N S I O N

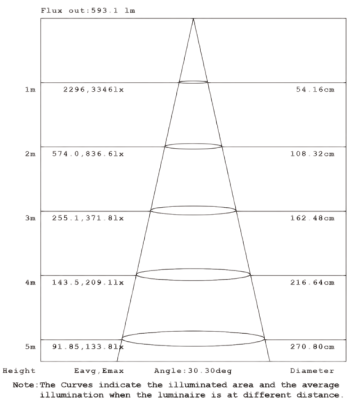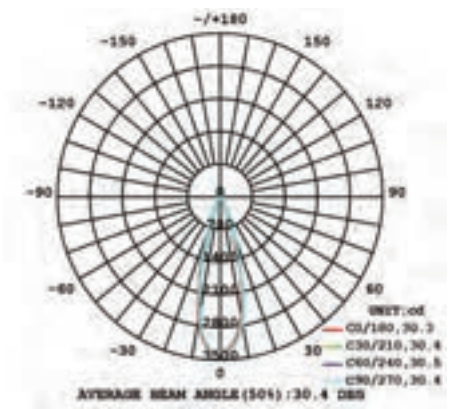


S P O T

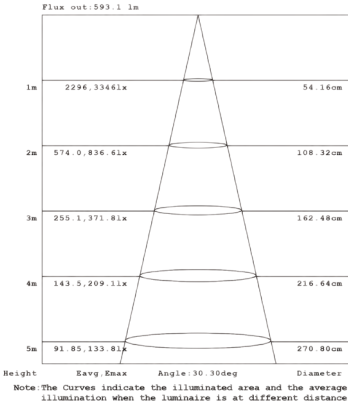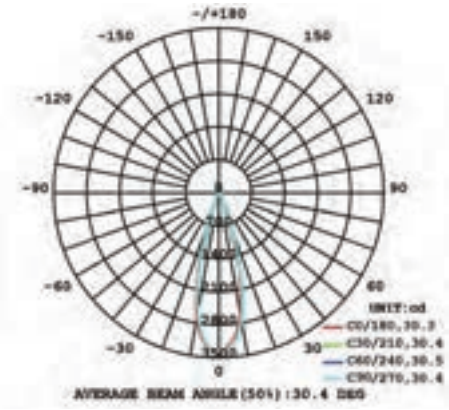


B R A V O

L I G H T P H O T O M E T R I C S


W A L L W A S H

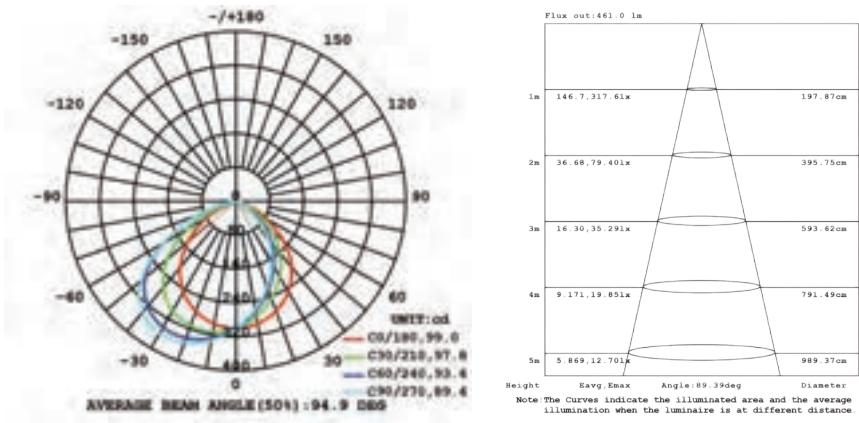

P A N E L

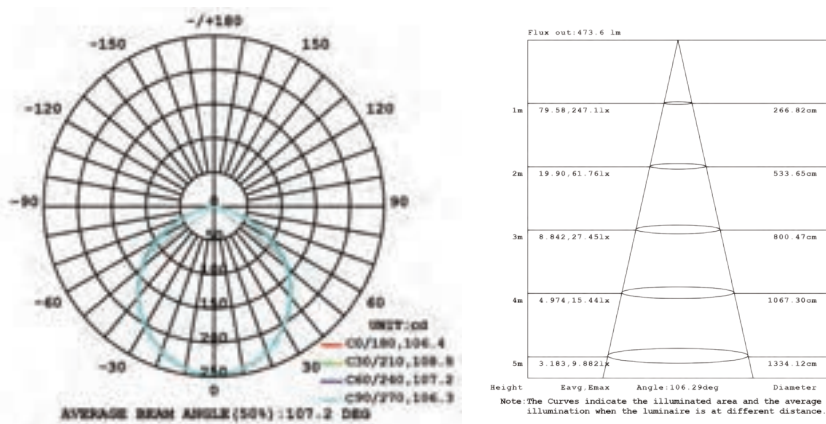


SURFACE MOUNT


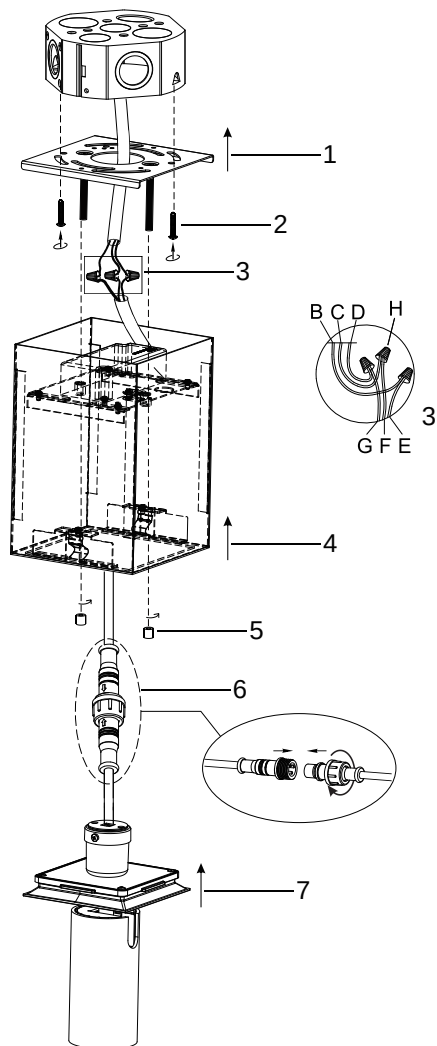


RECESSED

TRIM

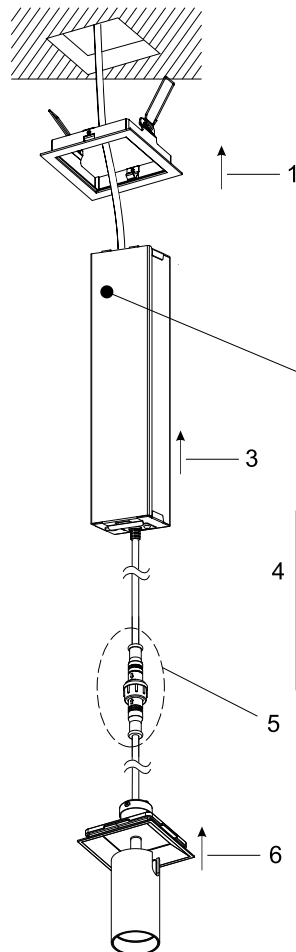

TRIMLESS

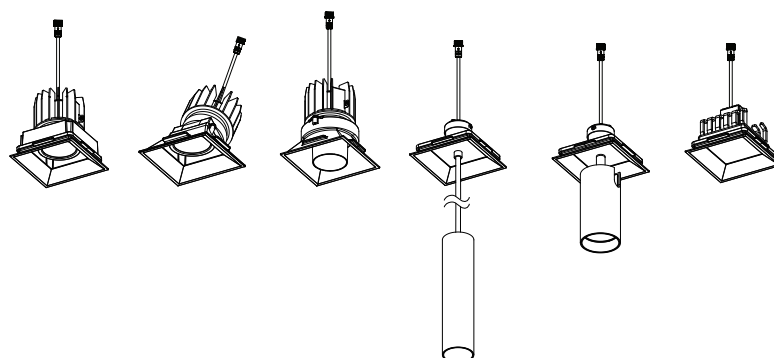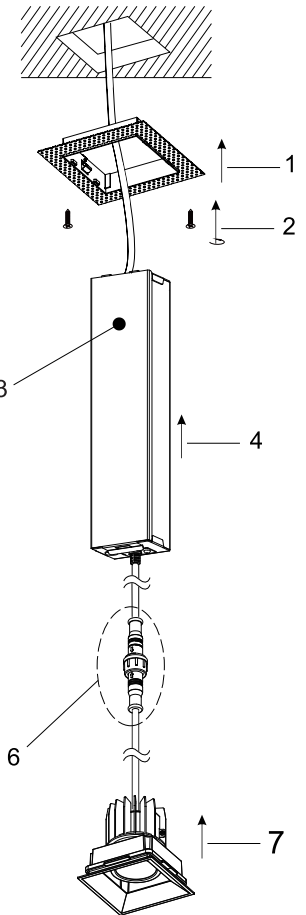



OSCAR

With their smooth, flat and edgeless design, Oscar family luminaires become a seamless part of ceiling decor. Available in larger aperture sizes with higher lumen packages makes this family ideal for use in higher ceilings, typically found in commercial settings. Oscar's three different light modules are designed for multiple applications and are available for multiple ordering options, making it both aesthetically beautiful and highly functional.



LUMINAIRES

PAGE 71



RECESSED FIXED

PAGE 73



RECESSED GIMBAL

PAGE 75




RECESSED WALL WASH

COMPLETE OSCAR FIXTURE ORDERING GUIDES

OSCAR ROUND & SQUARE RECESSED 3"	77 - 78
OSCAR ROUND & SQUARE RECESSED 4"	79 - 80
OSCAR ROUND & SQUARE RECESSED 5"	81 - 82

THE
OSCAR
REMIX

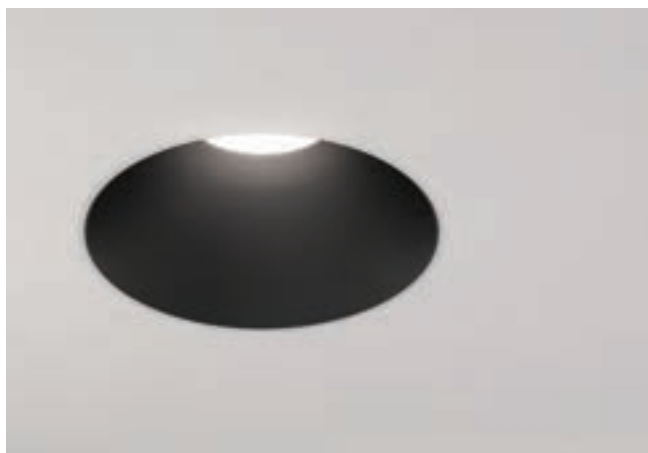





Shown as round Trim Fixed

Oscar LED Recessed Fixed

SPECIFICATIONS

Construction:	Diecast aluminum body, Powder Coated paint finish
Wattage/Lumens:	3" 10W 840 Lumens, IC Rated 3" 15W 1180 Lumens, Non-IC Rated 4" 26W 2290 Lumens, Non-IC Rated 5" 40W 3390 Lumens, Non-IC Rated
Power Supply:	ERP Brand, Constant Current LED Driver, enclosed in Junction Box with 12" flexible cable to mate to module connector
Light Module:	High output, high efficiency LED COB
Lumen Maintenance:	70%@50,000 hours
CRI:	90+
Input Voltage:	120V-277V
Dimming:	TRIAC/ELV/0-10V
Light Control:	Aluminum reflectors available: Narrow, Medium, Wide beam disbursement. Various diffusers used to customize light effect. Aluminum baffle inserts reduce glare and add aesthetic appeal



Approval:	Wet
Color Finish Options:	☐ Matte White ☐ Matte Black ☐ Custom
Electrical Approval:	COMPLIANT
Warranty:	

KELVIN OPTIONS	DIM-TO-WARM OPTION (15W)
2700K 3000K 3500K 4000K 	1800K - 3000K / 785 Lumens


BAFFLE OPTIONS



DIFFUSER OPTIONS

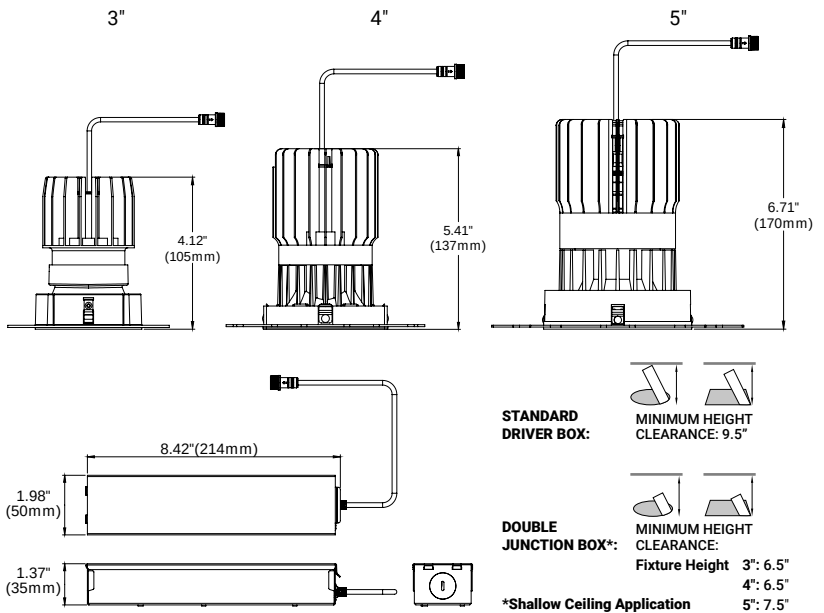

COMPATIBLE TRIMS + TRIMLESS MESH PLATES

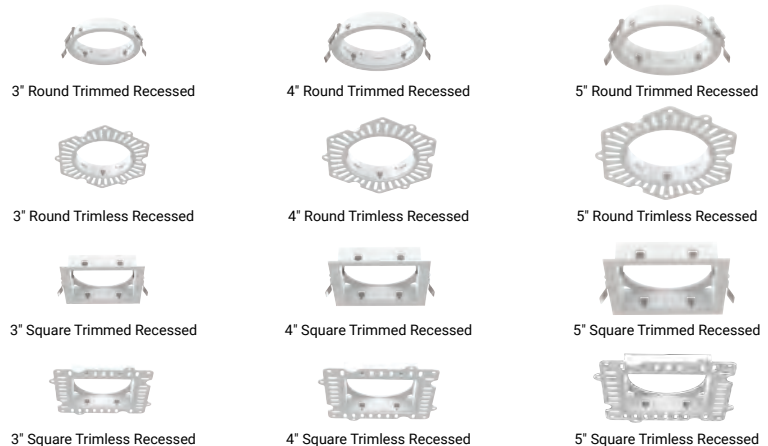

Recessed Trims and Trimless Mesh Plates for remodel application.
New Construction plates and IC boxes found within ordering guide.

COMPLETE OSCAR FIXED ORDERING GUIDES

	3" RECESSED Ordering Guide	Page 77 - 78
	4" RECESSED Ordering Guide	Page 79 - 80
	5" RECESSED Ordering Guide	Page 81 - 81





Shown as square Trimless Gimbal

Oscar LED Recessed Gimbal


SPECIFICATIONS

Construction:	Diecast aluminum body, Powder Coated paint finish
Wattage/Lumens:	3" 10W 840 Lumens, IC Rated 3" 15W 1180 Lumens, Non-IC Rated 4" 26W 2290 Lumens, Non-IC Rated 5" 40W 3390 Lumens, Non-IC Rated
Power Supply:	ERP Brand, Constant Current LED Driver, enclosed in Junction Box with 12" flexible cable to mate to module connector
Light Module:	High output, high efficiency LED COB
Lumen Maintenance:	70% @ 50,000 hours
CRI:	90+
Input Voltage:	120V-277V
Dimming:	TRIAC/ELV/0-10V
Light Control:	Aluminum reflectors available: Narrow, Medium, Wide beam disbursement. Various diffusers used to customize light effect. Aluminum baffle inserts reduce glare and add aesthetic appeal



Approval:	Damp
Color Finish Options:	☐ Matte White ☐ Matte Black ☐ Custom
Electrical Approval:	COMPLIANT
Warranty:	

KELVIN OPTIONS	DIM-TO-WARM OPTION (15W)
2700K 3000K 3500K 4000K 	1800K - 3000K / 785 Lumens


BAFFLE OPTIONS



DIFFUSER OPTIONS

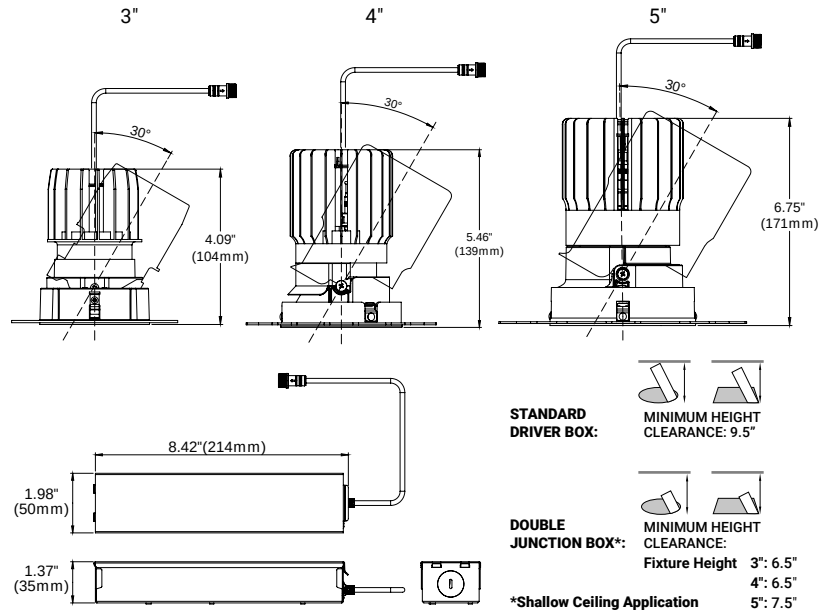

COMPATIBLE TRIMS + TRIMLESS MESH PLATES

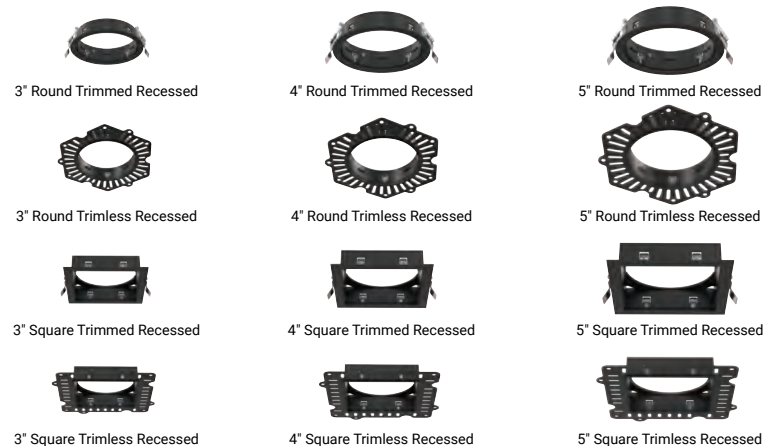

Recessed Trims and Trimless Mesh Plates for remodel application.
New Construction plates and IC boxes found within ordering guide.

COMPLETE OSCAR GIMBAL ORDERING GUIDES

	3" RECESSED Ordering Guide	Page 77 - 78
	4" RECESSED Ordering Guide	Page 79 - 80
	5" RECESSED Ordering Guide	Page 81 - 81






Shown as round Trimless Wall Wash

Oscar LED Recessed Wall Wash


SPECIFICATIONS

Construction:	Diecast aluminum body, Powder Coated paint finish
Wattage/Lumens:	3" 10W 380 Lumens, IC Rated 3" 15W 580 Lumens, Non-IC Rated 4" 26W 1200 Lumens, Non-IC Rated
Power Supply:	ERP Brand, Constant Current LED Driver, enclosed in Junction Box with 12" flexible cable to mate to module connector
Light Module:	High output, high efficiency LED COB
Lumen Maintenance:	70%@50,000 hours
CRI:	90+
Input Voltage:	120V-277V
Dimming:	TRIAC/ELV/0-10V
Light Control:	Aluminum reflectors available: Narrow, Medium, Wide beam disbursement. Various diffusers used to customize light effect. Aluminum baffle inserts reduce glare and add aesthetic appeal
Approval:	Damp
Color Finish Options:	☐ Matte White ☐ Matte Black ☐ Custom
Electrical Approval:	COMPLIANT
Warranty:	


KELVIN OPTIONS





DIM-TO-WARM OPTION (15W)



BAFFLE OPTIONS



DIFFUSER OPTIONS

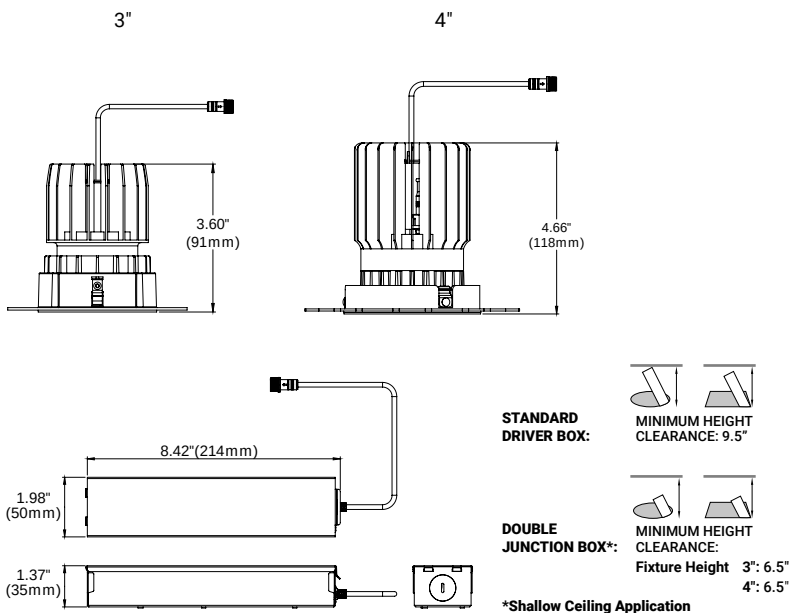

COMPATIBLE TRIMS + TRIMLESS MESH PLATES




Recessed Trims and Trimless Mesh Plates for remodel application.
New Construction plates and IC boxes found within ordering guide.

COMPLETE OSCAR WALL WASH ORDERING GUIDES



3" RECESSED Ordering Guide

Page 77 - 78



4" RECESSED Ordering Guide

Page 79 - 80



3" Oscar LED Ordering Guide

SPECIFICATIONS

FIXTURE BODY

- 18 gauge powder coated steel body
Aluminum powder coated or painted
- Standard in white or black finish. Other finishes consult factory

 SQUARE TRIM CUT HOLE: 3 1/4" x 3 1/4"

 SQUARE TRIMLESS CUT HOLE: 3" x 3"

 ROUND TRIM CUT HOLE: ø3 1/8"

 ROUND TRIMLESS CUT HOLE: ø3 1/4"

 **STANDARD DRIVER BOX:** MINIMUM HEIGHT CLEARANCE: 9 1/2"

 **DOUBLE JUNCTION BOX:** MINIMUM HEIGHT CLEARANCE: See preceding modules pages

- Maximum ceiling thickness:
 - Trimless: 1 1/2"
 - Trim: 1 1/4"

MOUNTING

- Remodel application, new construction plates or IC / Airtight / enclosures sold separately

POWER SUPPLY

- ERP Brand 120V - 277V input, Constant Current 10W 250mA or 15W 350mA power supply
- Thermally protected
- Minimum operating temperature: -30°
- Enclosed Junction box with 12" flexible cable to mate to module connector
- Dimming: TRIAC, ELV and 0-10V

LIGHT MODULE

- High output, high efficiency LED COB
- CRI 90+
- Lumen Maintenance: 70%@50,000 hrs
- Recessed Fixed Light module wet listed, all others damp listed
- 3" Recessed Fixed & Gimbal:
 - 10W IC Rated, 840 Lumens, all CCTs listed available
 - 15W Non-IC Rated, 1180 Lumens, all CCTs listed available
- 3" Recessed Wall Wash:
 - 10W IC Rated, 380 Lumens, all CCTs listed available
 - 15W Non-IC Rated, 580 Lumens, all CCTs listed available
- Wall Wash available in Matte White & Matte Black baffles only
- Dim-to-Warm modules 3" only, Non-IC Rated

REFLECTORS

- Recessed Fixed, Recessed Gimbal & Recessed Wall Wash available in Narrow, Medium & Wide


ELECTRICAL APPROVAL



WARRANTY



1 SELECT SHAPE

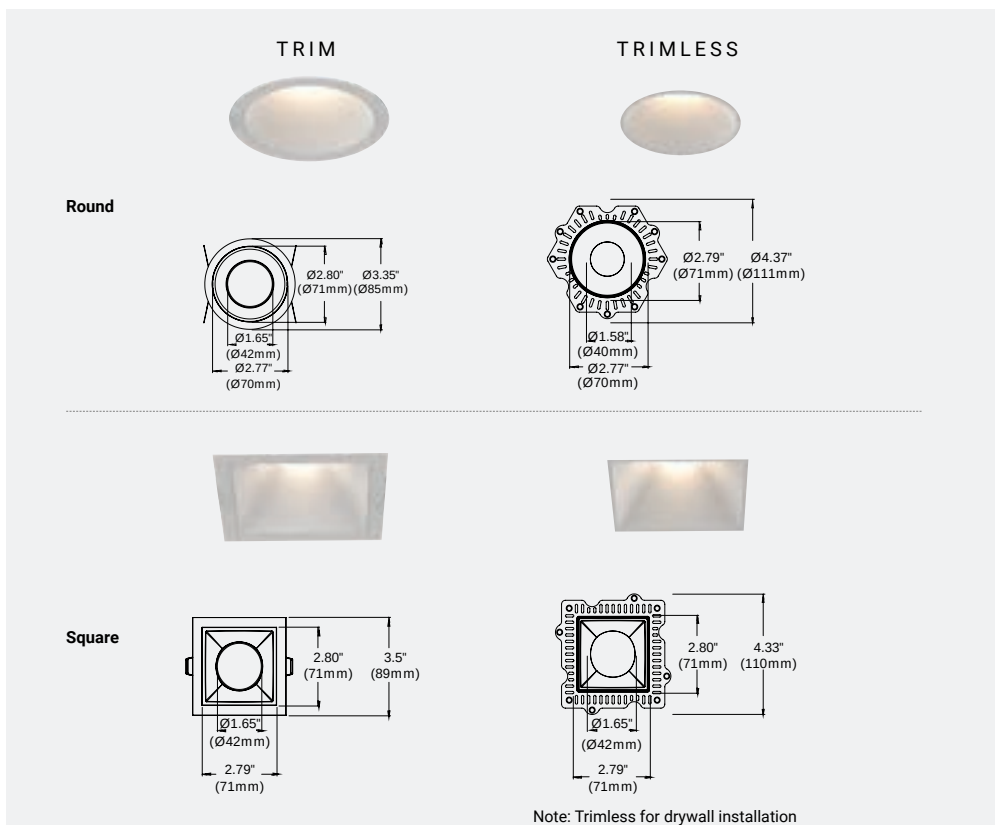

2 SELECT TRIM



3 SELECT FINISH



4 SELECT LIGHT MODULE




5 SELECT BAFFLE



6

SELECT DRIVER / MODULE WATTAGE

10W / 15W

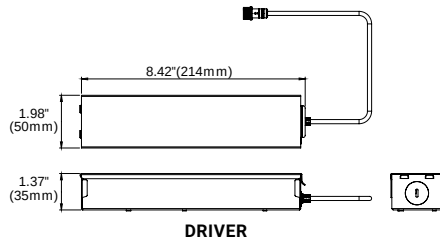

DRIVER



FIXED
10W / 15W



GIMBAL
10W / 15W




WALL WASH
10W / 15W

7

SELECT CCT

KELVIN OPTIONS



DIM-TO-WARM OPTION (15W)

1800K - 3000K / 785 Lumens



8

SELECT REFLECTOR



(N)
15°
Narrow




(M)
24°
Medium



(W)
38°
Wide

9

SELECT DIFFUSER



ORDERING GUIDE CONFIGURATOR

OSC	SIZE	1	2	3	4	5	6	7	8	9
OSCAR	3"	SHAPE	TRIM/ TRIMLESS	FINISHES	LIGHT MODULE	BAFFLE FINISHES	WATTAGE	CCT	BEAM ANGLE	DIFFUSER
OSC	3	R ROUND	T TRIM	01 BLACK	RF RECESSED FIXED	01 MATTE BLACK*	10 10W	27	N 15°	CL CLEAR*
		S SQUARE	TL TRIMLESS	02 WHITE	RG RECESSED GIMBAL	02 MATTE WHITE*	15 15W	30	M 24°	LN LINEAR SPREAD
					WL WALL WASH	03 GOLD		35	W 38°	HC HONEYCOMB
						04 CHROME		40		FR FROSTED*
						05 DARK CHROME				SP SOLITE
								DTW* Dim To Warm 15W only		RE RED DICHROIC*
										GR GREEN DICHROIC*
										BL BLUE DICHROIC*
										OR ORANGE DICHROIC*

ORDERING GUIDE EXAMPLE 1:

Oscar / 3" / Square / Trim / Black / Recessed Fixed / Gold Baffle / 10W / 3500K / 38° Beam Angle / Clear Diffuser

CODE: **OSC-3-S-T-01-RF-03-10-35-W-CL**

ORDERING GUIDE EXAMPLE 2:

Oscar / 3" / Round / Trim / White / Recessed Gimbal / Chrome / 15W / 2700K / 15° Beam Angle / Clear Diffuser

CODE: **OSC-3-R-T-02-RG-04-15-27-N-CL**

ORDERING GUIDE EXAMPLE 3:

Oscar / 3" / Square / Trimless / Black / Wall Wash / Matte Black / 15W / 3500K / 38° Beam Angle / Frosted

CODE: **OSC-3-S-TL-01-WL-01-15-35-W-FR**

Wall Wash module available with Matte Black & Matte White Baffles only.

NEW CONSTRUCTION PLATES + IC/AT BOXES

3" ROUND APERTURE



TRIM
43784-011

TRIMLESS
30534-018

CUT HOLE:
Trim: ø3 1/8"
Trimless: ø3 1/4"





TRIM
AT/IC Box: 44837-020
IC Box: 44837-013

CUT HOLE:
Trim: ø3 1/8"
Trimless: ø3 1/4"

TRIMLESS
AT/IC Box: 30530-026
IC Box: 30530-010

CUT HOLE:
Trim: ø3 1/8"
Trimless: ø3 1/4"

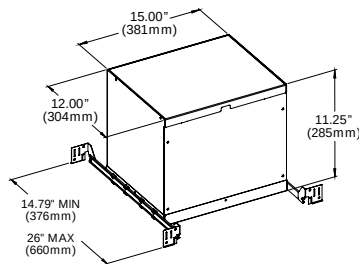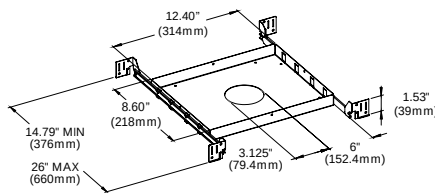

3" SQUARE APERTURE



TRIM
30535-015

TRIMLESS
30536-012

CUT HOLE:
Trim: 3 1/4"
Trimless: 3"





TRIM
AT/IC Box: 30531-021
IC Box: 30531-017

CUT HOLE:
Trim: 3 1/4"
Trimless: 3"

TRIMLESS
AT/IC Box: 30532-023
IC Box: 30532-014

CUT HOLE:
Trim: 3 1/4"
Trimless: 3"

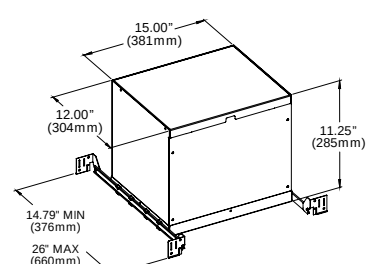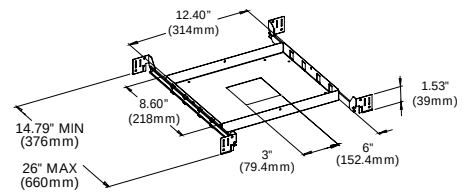

4" Oscar LED Ordering Guide

SPECIFICATIONS

FIXTURE BODY

- 18 gauge powder coated steel body. Aluminum powder coated or painted
- Standard in white or black finish. Other finishes consult factory

-  SQUARE TRIM CUT HOLE: 4" x 4"
-  SQUARE TRIMLESS CUT HOLE: 4" x 4"
-  ROUND TRIM CUT HOLE: Ø4"
-  ROUND TRIMLESS CUT HOLE: Ø4"

-  **STANDARD DRIVER BOX:** MINIMUM HEIGHT CLEARANCE: 9 1/2"
-  **DOUBLE JUNCTION BOX:** MINIMUM HEIGHT CLEARANCE: See preceding modules pages

- Maximum ceiling thickness:
 - Trimless: 1 1/2"
 - Trim: 1 1/4"

MOUNTING

- Remodel application, new construction plates or IC / Airtight / enclosures sold separately

POWER SUPPLY

- ERP Brand 120V - 277V input, Constant Current 26W 700mA power supply
- Thermally protected
- Minimum operating temperature: -30°
- Enclosed Junction box with 12" flexible cable to mate to module connector
- Dimming: TRIAC, ELV and 0-10V

LIGHT MODULE

- High output, high efficiency LED COB
- CRI 90+
- Lumen Maintenance: 70% @ 50,000 hrs
- Recessed Fixed Light module wet listed, all others damp listed
- 4" Recessed Fixed & Gimbal: 26W Non-IC Rated, 2290 Lumens, all CCTs listed available
- 4" Recessed Wall Wash: 26W Non-IC Rated, 1200 Lumens, all CCTs listed available
- Wall Wash available to Matte White & Matte Black baffles only

REFLECTORS

- Recessed Downlight, Gimbal & Wall Wash available in Narrow, Medium & Wide


ELECTRICAL APPROVAL




WARRANTY



1 SELECT SHAPE

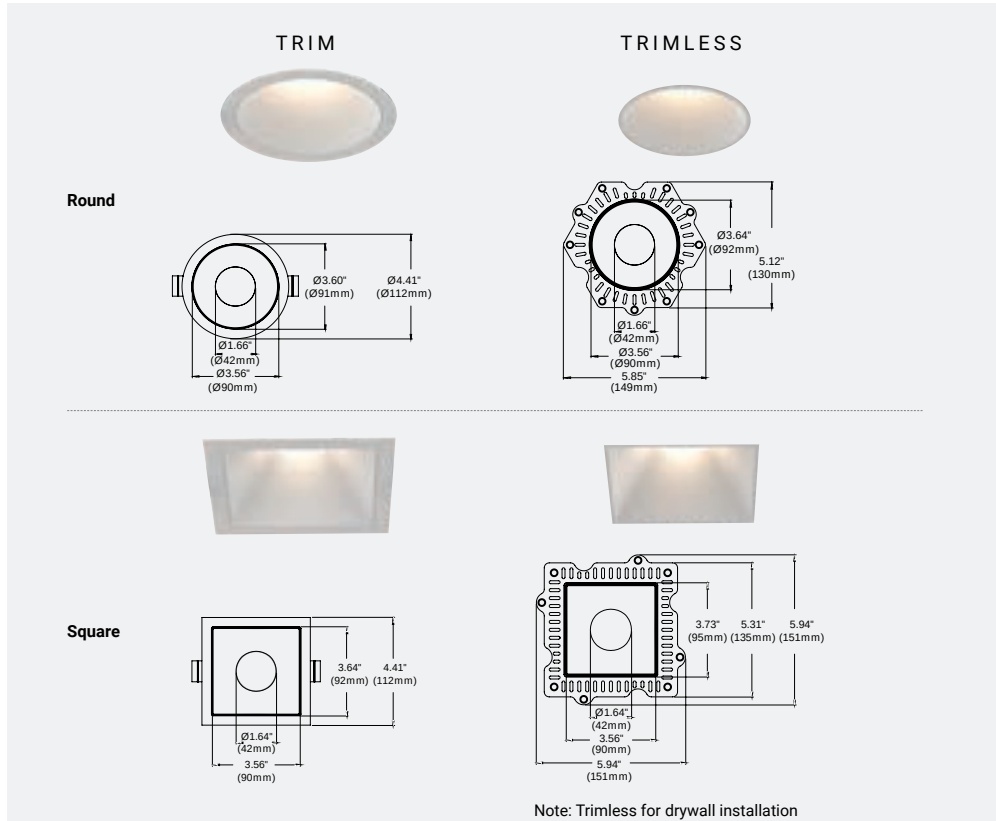

2 SELECT TRIM



3 SELECT FINISH




4 SELECT LIGHT MODULE




5 SELECT BAFFLE



6 SELECT DRIVER / MODULE WATTAGE 26W

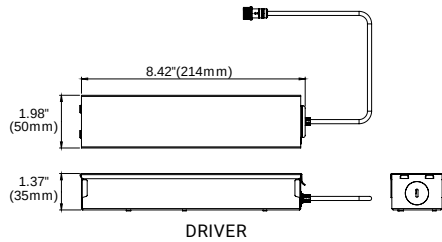

7 SELECT CCT KELVIN OPTIONS




DIM-TO-WARM OPTION (15W)


1800K - 3000K / 785 Lumens



8 SELECT REFLECTOR



9 SELECT DIFFUSER



ORDERING GUIDE CONFIGURATOR

OSC	SIZE	1	2	3	4	5	6	7	8	9
OSCAR	4"	SHAPE	TRIM/ TRIMLESS	FINISHES	LIGHT MODULE	BAFFLE FINISHES	WATTAGE	CCT	BEAM ANGLE	DIFFUSER
OSC	4	R ROUND	T TRIM	01 BLACK	RF RECESSED FIXED	01 MATTE BLACK*	26 26W	27	N 15°	CL CLEAR*
		S SQUARE	TL TRIMLESS	02 WHITE	RG RECESSED GIMBAL	02 MATTE WHITE*		30	M 24°	LN LINEAR SPREAD
					WL WALL WASH	03 GOLD		35	W 38°	HC HONEYCOMB
						04 CHROME		40		FR FROSTED
						05 DARK CHROME				SP SOLITE
										RE RED DICHROIC*
										GR GREEN DICHROIC*
										BL BLUE DICHROIC*
										OR ORANGE DICHROIC*

ORDERING GUIDE EXAMPLE 1:

Oscar / 4" / Square / Trim / Black / Recessed Fixed / Gold Baffle / 26W / 3000K / 15° Beam Angle / Spread Diffuser

CODE: **OSC-4-S-T-01-RF-03-26-30-N-SP**

ORDERING GUIDE EXAMPLE 2:

Oscar / 4" / Round / Trim / White / Recessed Gimbal / Chrome / 26W / 4000K / 24° Beam Angle / Clear Diffuser

CODE: **OSC-4-R-T-02-RG-04-26-40-M-CL**

ORDERING GUIDE EXAMPLE 3:

Oscar / 4" / Square / Trimless / Black / Wall Wash / Matte White / 26W / 3500K / 38° Beam Angle / Clear Diffuser

CODE: **OSC-4-S-TL-01-WL-02-26-35-W-CL**

Wall Wash module available with Matte Black & Matte White Baffles only.



NEW CONSTRUCTION PLATES + IC/AT BOXES

ROUND APERTURE




TRIM / TRIMLESS
43786-015

CUT HOLE:
Trim & Trimless: Ø4"

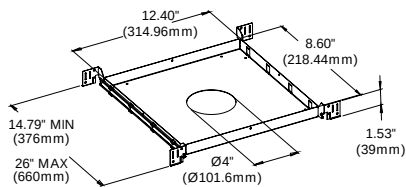

TRIM / TRIMLESS
AT/IC Box: 44300-026
IC Box: 44300-012

CUT HOLE:
Trim & Trimless: Ø4"


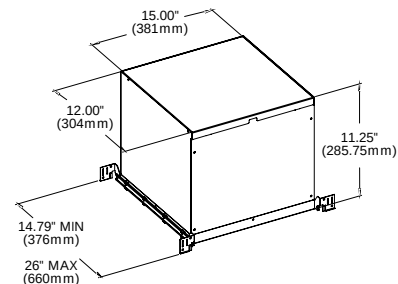


SQUARE APERTURE




TRIM / TRIMLESS
44838-010

CUT HOLE:
Trim & Trimless: 4" x 4"

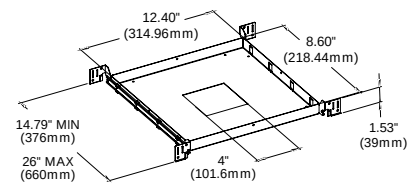

TRIM / TRIMLESS
AT/IC Box: 44839-024
IC Box: 44839-017

CUT HOLE:
Trim & Trimless: 4" x 4"

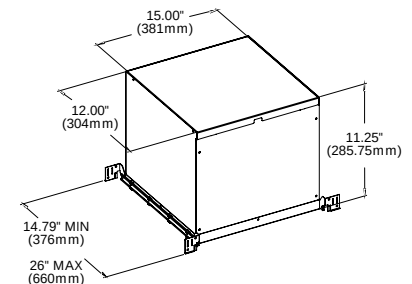


5" Oscar LED Ordering Guide

SPECIFICATIONS

FIXTURE BODY

- 18 gauge powder coated steel body. Aluminum powder coated or painted
- Standard in white or black finish. Other finishes consult factory

-  SQUARE TRIM CUT HOLE: 5 1/8" x 5 1/8"
-  SQUARE TRIMLESS CUT HOLE: 5 1/8" x 5 1/8"
-  ROUND TRIM CUT HOLE: ø5 1/8"
-  ROUND TRIMLESS CUT HOLE: ø5 1/8"

-  **STANDARD DRIVER BOX:** MINIMUM HEIGHT CLEARANCE: 9 1/2"
-  **DOUBLE JUNCTION BOX:** MINIMUM HEIGHT CLEARANCE: See preceding modules pages

- Maximum ceiling thickness:
 - Trimless: 1 1/2"
 - Trim: 1 1/4"

MOUNTING

- Remodel application, new construction plates or IC / Airtight / enclosures sold separately

POWER SUPPLY

- ERP Brand 120V - 277V input, Constant Current 40W 1050mA power supply
- Thermally protected
- Minimum operating temperature: -30°
- Enclosed Junction box with 12" flexible cable to mate to module connector
- Dimming: TRIAC, ELV and 0-10V

LIGHT MODULE

- High output, high efficiency LED COB
- CRI 90+
- Lumen Maintenance: 70%@50,000 hrs
- Recessed Fixed Light module wet listed, all others damp listed
- 5" Recessed Fixed & Gimbal: 26W Non-IC Rated, 3390 Lumens, all CCTs listed available

REFLECTORS

- Recessed Fixed & Gimbal available in Narrow, Medium & Wide


ELECTRICAL APPROVAL




WARRANTY



1 SELECT SHAPE

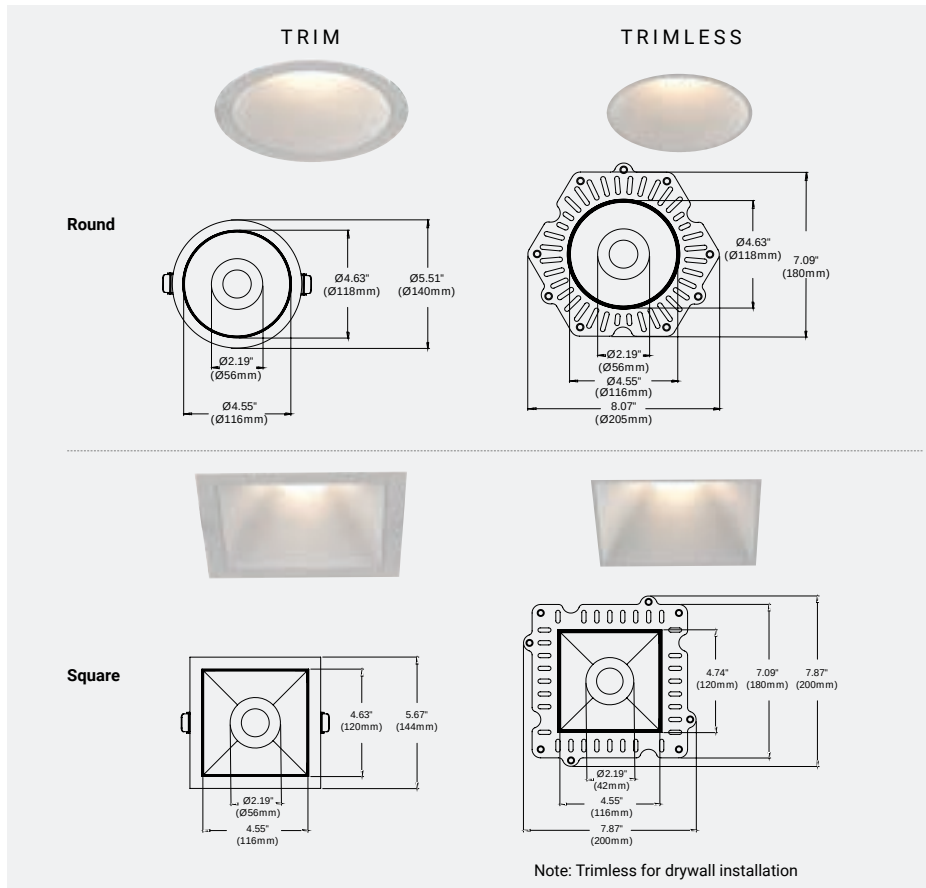

2 SELECT TRIM



3 SELECT FINISH




4 SELECT LIGHT MODULE



5 SELECT BAFFLE




6 SELECT DRIVER / MODULE WATTAGE
40W

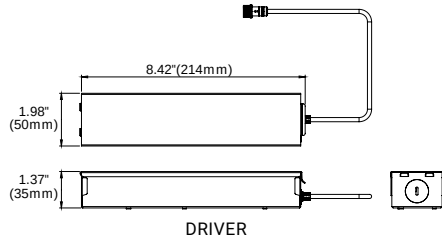


7 SELECT CCT
KELVIN OPTIONS
2700K 3000K 3500K 4000K



8 SELECT REFLECTOR



9 SELECT DIFFUSER



ORDERING GUIDE CONFIGURATOR

OSC	SIZE	1	2	3	4	5	6	7	8	9
OSCAR	5"	SHAPE	TRIM/ TRIMLESS	FINISHES	LIGHT MODULE	BAFFLE FINISHES	WATTAGE	CCT	BEAM ANGLE	DIFFUSER
OSC	5	R ROUND	T TRIM	01 BLACK	RF RECESSED FIXED	01 MATTE BLACK	40 40W	27	N 15°	CL CLEAR
		S SQUARE	TL TRIMLESS	02 WHITE	RG RECESSED GIMBAL	02 MATTE WHITE		30	M 24°	LN LINEAR SPREAD
						03 GOLD		35	W 38°	HC HONEYCOMB
						04 CHROME		40		FR FROSTED
						05 DARK CHROME				SP SOLITE
										RE RED DICHROIC
										GR GREEN DICHROIC
										BL BLUE DICHROIC
										OR ORANGE DICHROIC

ORDERING GUIDE EXAMPLE 1:

Oscar / 5" / Round / Trim / Black / Recessed Fixed / Chrome / 40W / 3000K / 24° Beam Angle / Linear Spread Diffuser

CODE: **OSC-5-R-T-01-RF-04-40-30-M-LN**

ORDERING GUIDE EXAMPLE 2:

Oscar / 5" / Square / Trimless / White / Recessed Gimbal / Gold / 40W / 3500K / 24° Beam Angle / Frosted Diffuser

CODE: **OSC-5-S-T-02-RG-03-40-35-M-FR**


NEW CONSTRUCTION PLATES + IC/AT BOXES

ROUND APERTURE




TRIM / TRIMLESS
43788-019

CUT HOLE:
Trim & Trimless: $\phi 5 \frac{1}{8}"$

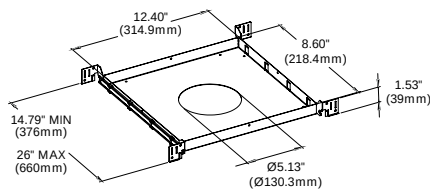

TRIM / TRIMLESS
AT/IC Box: 44302-021
IC Box: 44302-016

CUT HOLE:
Trim & Trimless: $\phi 5 \frac{1}{8}"$

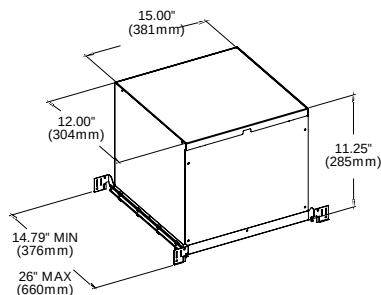


SQUARE APERTURE




TRIM / TRIMLESS
24051-019

CUT HOLE:
Trim & Trimless: $5 \frac{1}{8}" \times 5 \frac{1}{8}"$

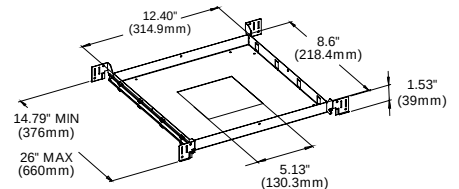



TRIM / TRIMLESS
AT/IC Box: 30366-015
IC Box: 24071-017

CUT HOLE:
Trim & Trimless: $5 \frac{1}{8}" \times 5 \frac{1}{8}"$


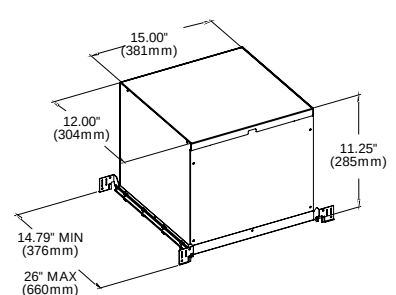


RECESSED FIXED



10W 1-LIGHT DOWNLIGHT NARROW CLEAR

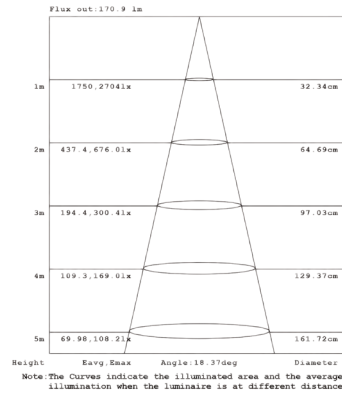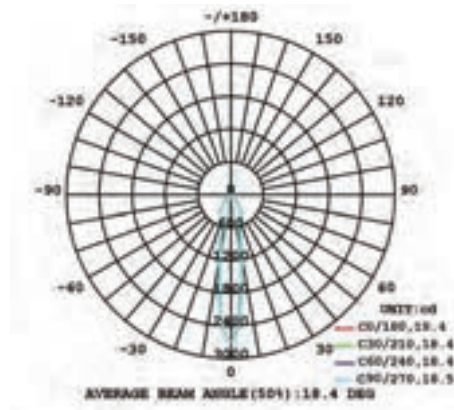

10W 1-LIGHT DOWNLIGHT MEDIUM CLEAR

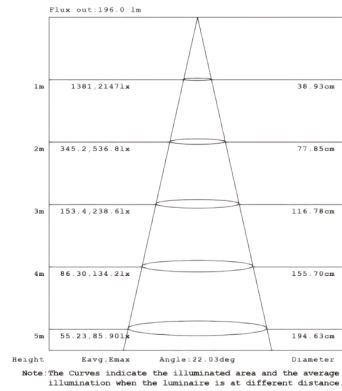
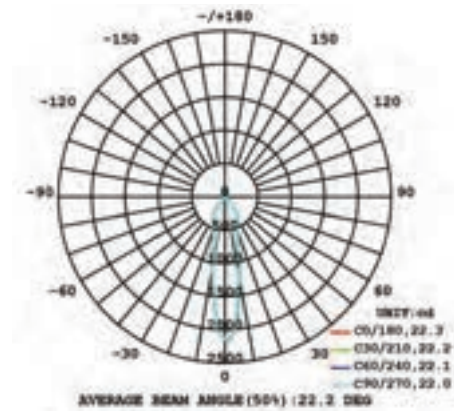


10W 1-LIGHT DOWNLIGHT WIDE CLEAR

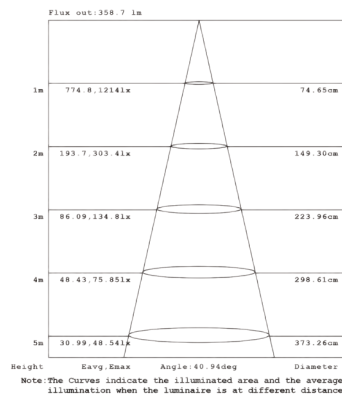
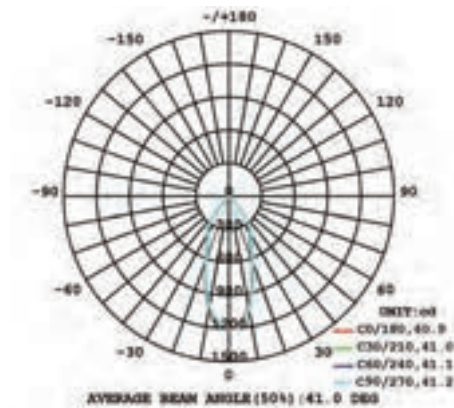


RECESSED FIXED



15W 1-LIGHT DOWNLIGHT NARROW CLEAR

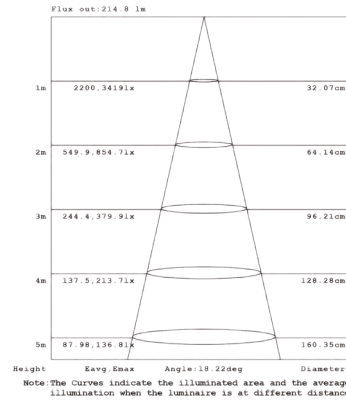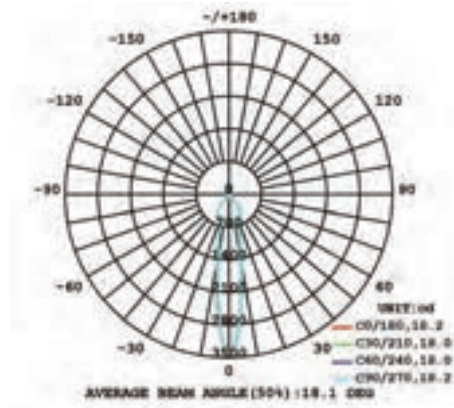

15W 1-LIGHT DOWNLIGHT MEDIUM CLEAR

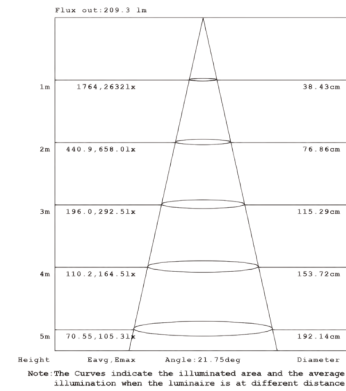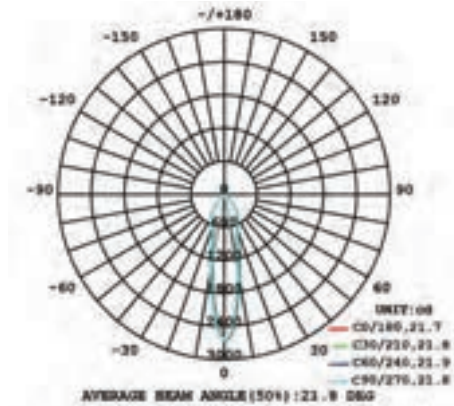


15W 1-LIGHT DOWNLIGHT WIDE CLEAR

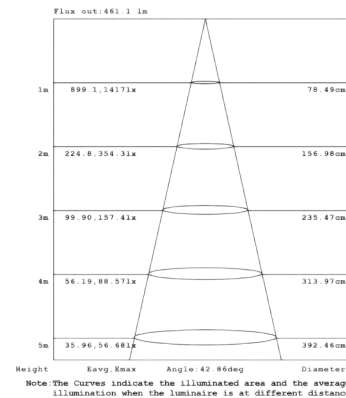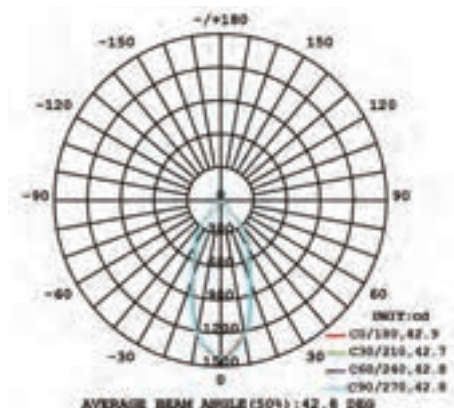


RECESSED GIMBAL


10W 1-LIGHT GIMBAL NARROW CLEAR

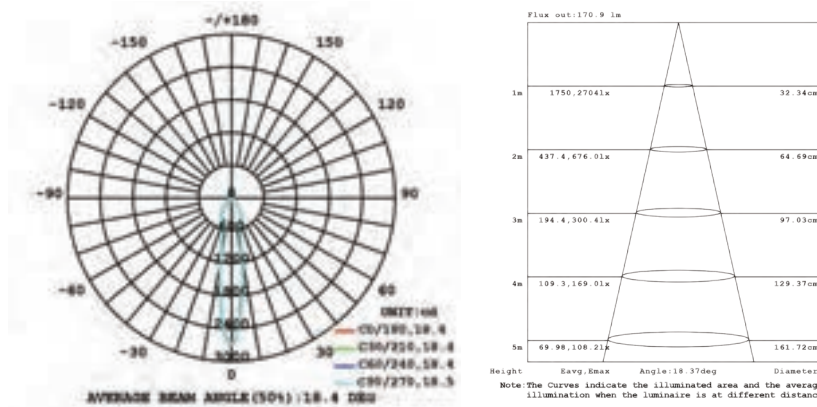

10W 1-LIGHT GIMBAL MEDIUM CLEAR


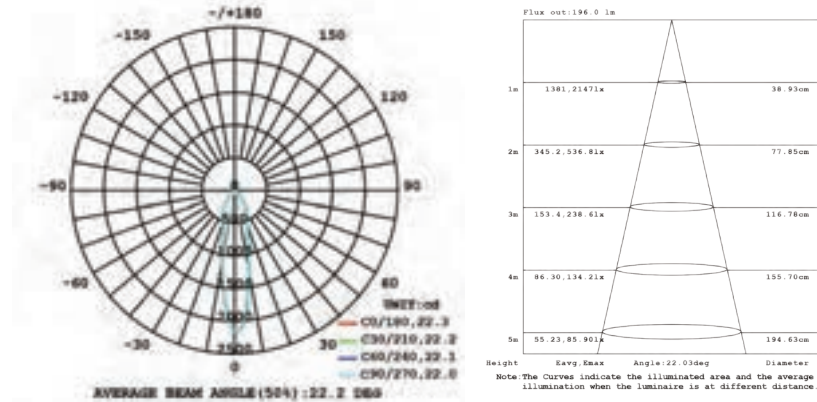


10W 1-LIGHT GIMBAL WIDE CLEAR


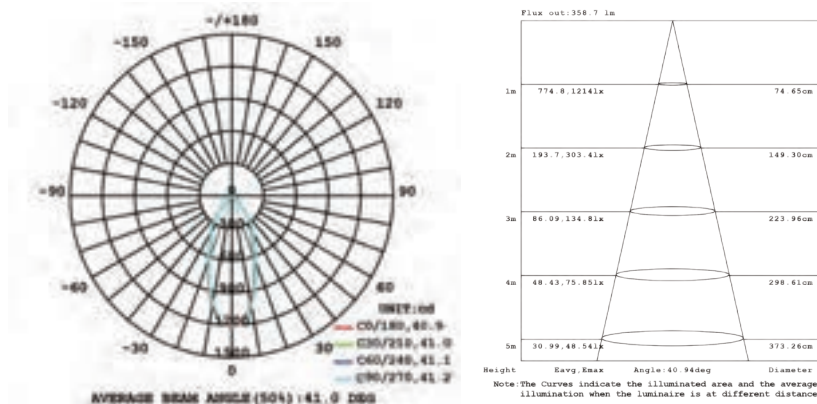


RECESSED GIMBAL



15W 1-LIGHT GIMBAL NARROW CLEAR

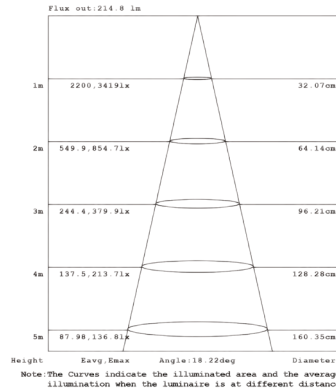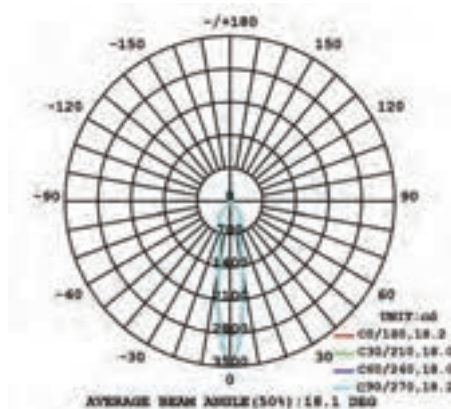

15W 1-LIGHT GIMBAL MEDIUM CLEAR

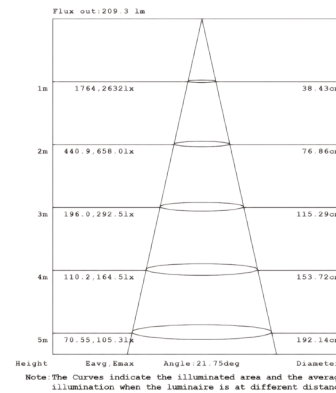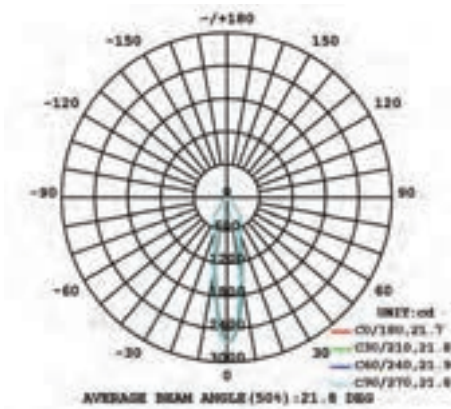


15W 1-LIGHT GIMBAL WIDE CLEAR

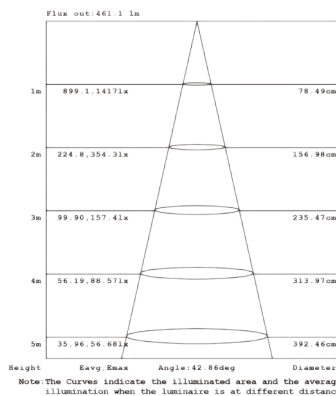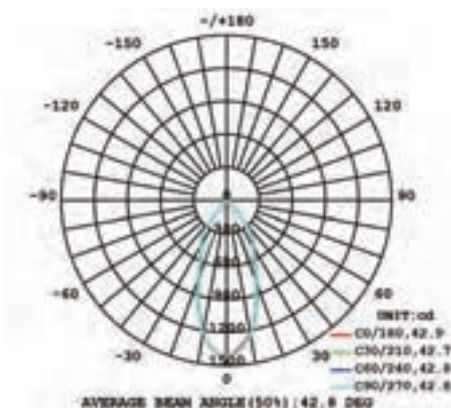


RECESSED WALL WASH

15W 1-LIGHT WALL WASH CLEAR

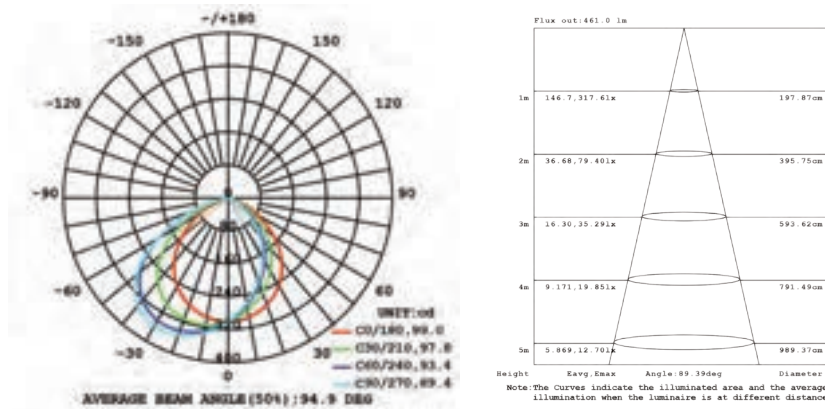

26W 1-LIGHT WALL WASH CLEAR

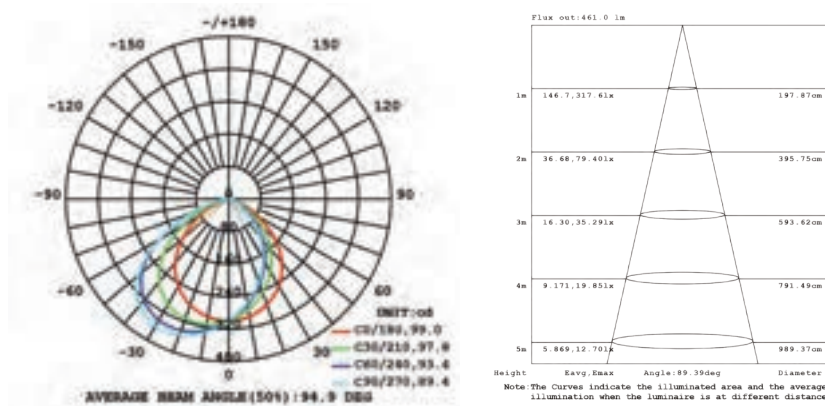



TRIMLESS CREATIVITY*

Linkable plaster frames
for infinite configurations

BEFORE



AFTER




*Applicable for Remodel Applications only

WHISKEY

Whiskey family cylinders are remarkable in appearance and highly functional with designs to suit 3 applications, two diameters and three fixture lengths. With multiple options to choose from, it's easy to find the right luminaire for your project.

A robust yet elegant extruded aluminum body and powder coated finish make it ideal for commercial, residential or hospitality settings.

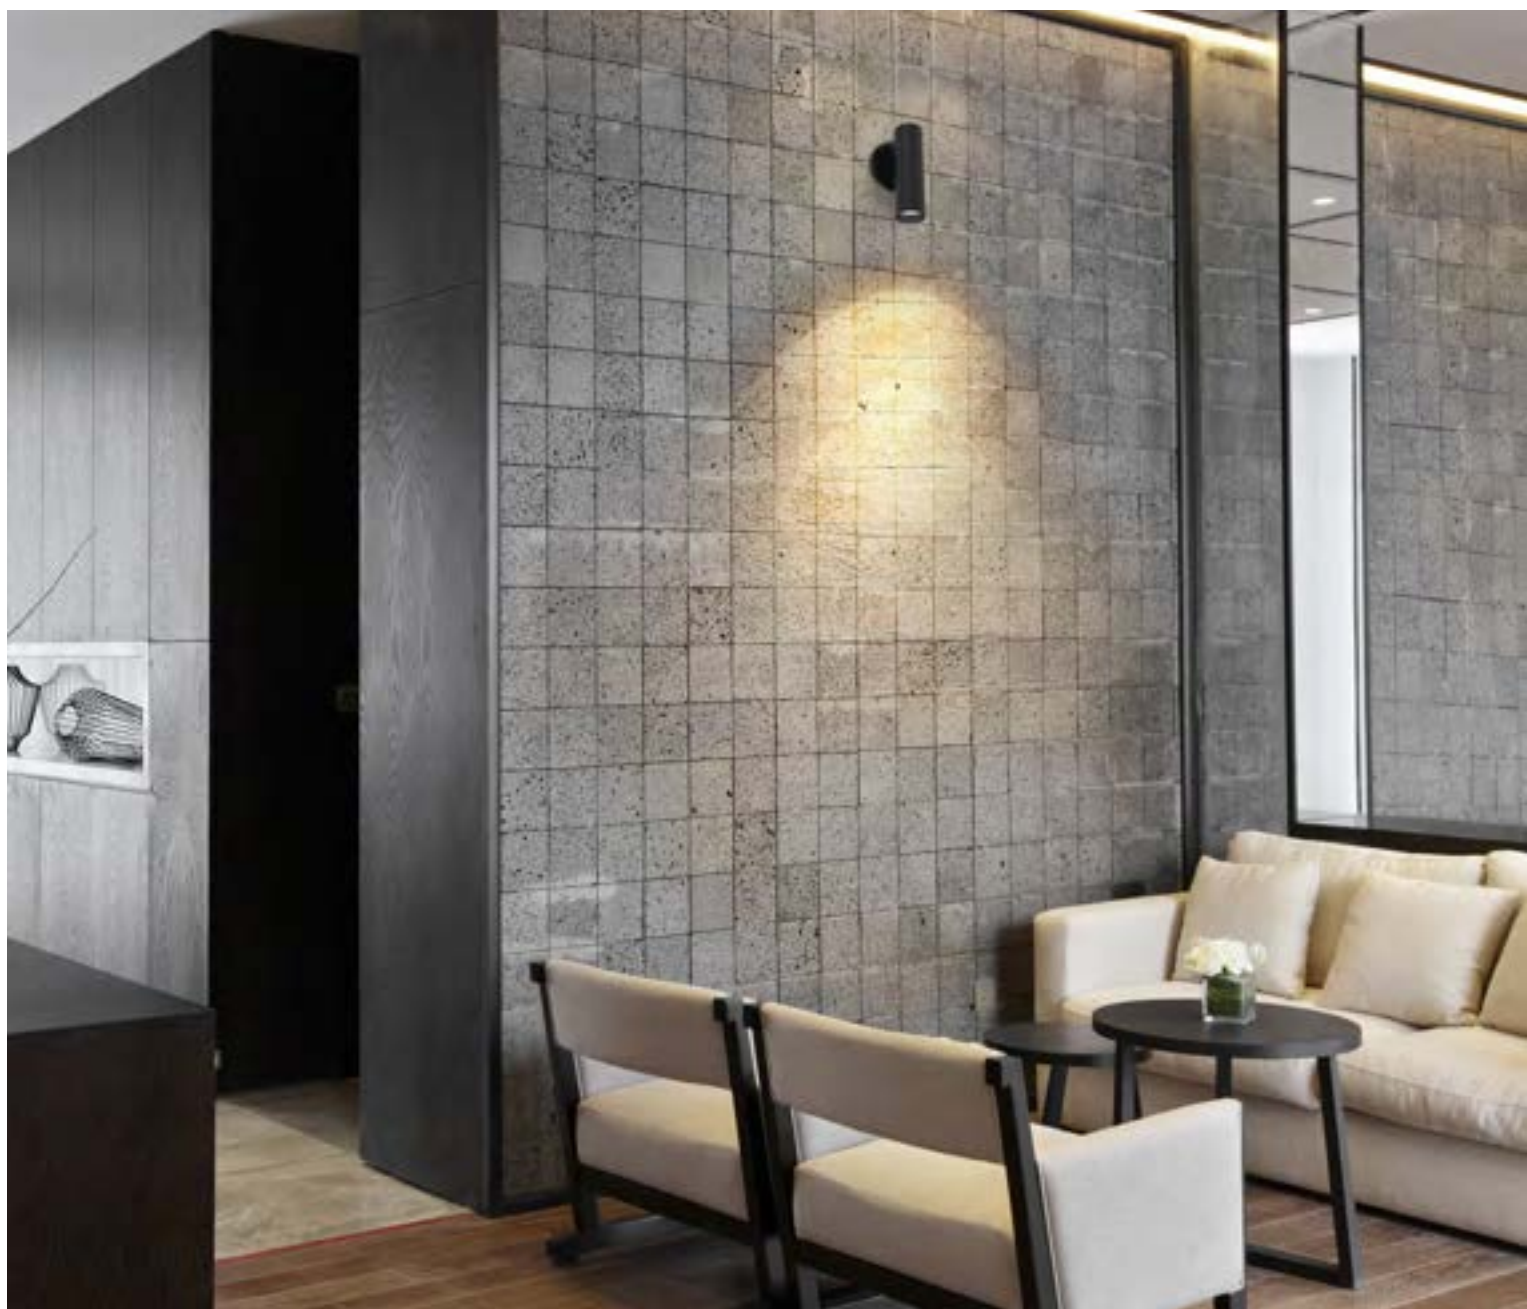



COMPLETE WHISKEY FIXTURE ORDERING GUIDES

WHISKEY SURFACE MOUNT	95 - 96
WHISKEY SUSPENSION	97 - 98
WHISKEY WALL MOUNT	99 - 100

THE
WHISKEY
REMIX









WHISKEY

Architectural Surface Mount Fixture



Whiskey LED Surface Mount Ordering Guide

1 SELECT FINISH



Matte White



Matte Black



Custom

2 SELECT CYLINDER SIZE

FEATURES

Whiskey family cylinders are remarkable in appearance and highly functional with designs to suit 3 applications, two diameters and three fixture lengths with multiple options to choose from, it's easy to find the right luminaire for your project. A robust yet elegant extruded aluminum body and powder coated finish make it ideal for commercial, residential or hospitality settings.

SPECIFICATIONS

FIXTURE BODY

- Extruded aluminum body powder coat painted 2.5" or 4.5" diameter
- Three lengths per diameter ranging from 7" to 18"
- Standard in white or black finish. Other finishes consult factory

MOUNTING

- Mounts over standard octagon box (canopy included)

POWER SUPPLY

- 13W 350mA or 26W 700mA Constant Current driver
- Dimming: TRIAC, ELV and 0-10V
- Concealed inside fixture body
- Minimum operating temp - 30°C

LED LIGHT MODULE

- Slim 15W, 1260 Lumens, Broad 15W, 1260 Lumens or 26W, 2030 Lumens
- Available in multiple CCT options
- Lumen Maintenance: 70% @ 50,000 Hrs
- Approval: Damp

BAFFLE INSERT

- Aluminum baffle inserts designed to cut glare and add aesthetic appeal, available in 4 finishes

BEAM CONTROL

- Deep cone shaped low iridescence aluminum reflectors available in Narrow, Medium & Wide

LIGHT DIFFUSER

- Located above the baffle insert and below the reflector, several different designs to optimize light control

ELECTRICAL APPROVAL




COMPLIANT


WARRANTY




SLIM 8" (SL8)




SLIM 13" (SLM13)




SLIM 18" (SL18)




BROAD 6" (BR6)



BROAD 10" (BR10)



BROAD 18" (BR18)



See Whiskey Photometrics on page 101 - 103

3 SELECT BAFFLE




4 SELECT DRIVER / MODULE WATTAGE

SLIM: 13W
BROAD: 13W or 26W

LED Driver Enclosed
Integral Driver,
One per module



5 SELECT CCT



6 SELECT REFLECTOR



7 SELECT DIFFUSER



ORDERING GUIDE CONFIGURATOR

WHS	MOUNT	1	2	3	4	5	6	7
WHISKEY	SURFACE MOUNT	FINISH	CYLINDER SIZE	WHISKEY BAFFLE FINISH	WATTAGE	CCT	BEAM ANGLE	DIFFUSER
WHS	S	01	BLACK	SL8 SLIM 8"	01 MATTE BLACK	13 13W	27 N 15°	CL CLEAR
		02	WHITE	SL13 SLIM 13"	02 MATTE WHITE	26 26W	30 M 24°	LN LINEAR SPREAD
				SL18 SLIM 18"	03 CHROME		35 W 38°	HC HONEYCOMB
				BR6 BROAD 6"	04 GOLD		40	FR FROSTED
				BR10 BROAD 10"				SP SOLITE
				BR18 BROAD 18"				

ORDERING GUIDE EXAMPLE 1:

Whiskey / Surface Mount / Black / Slim 13" / Chrome /
13W / 3000K / 38° Beam Angle / Clear Diffuser

CODE: **WHS-S-01-SL13-03-13-30-W-CL**

WHISKEY



Architectural Suspension Fixture

Whiskey LED Suspension Ordering Guide

1 SELECT FINISH



Matte White



Matte Black



Custom

2 SELECT CYLINDER SIZE

FEATURES

Whiskey family cylinders are remarkable in appearance and highly functional with designs to suit 3 applications, two diameters and three fixture lengths with multiple options to choose from, it's easy to find the right luminaire for your project. A robust yet elegant extruded aluminum body and powder coated finish make it ideal for commercial, residential or hospitality settings.

SPECIFICATIONS

FIXTURE BODY

- Extruded aluminum body powder coat painted 2.5" or 4.5" diameter
- Three lengths per diameter ranging from 7" to 18"
- Standard in white or black finish. Other finishes consult factory

MOUNTING

- Mounts over standard octagon box (canopy included)
- Field adjustable height (max 72" cord), for cord length modification or solid stem suspension options consult factory

POWER SUPPLY

- 13W 350mA or 26W 700mA Constant Current driver
- Dimming: TRIAC, ELV and 0-10V
- Concealed inside fixture body
- Minimum operating temp - 30°C

LED LIGHT MODULE

- Slim 13W, 1260 Lumens, Broad 13W, 1260 Lumens or 26W, 2030 Lumens
- Available in multiple CCT options
- Lumen Maintenance: 70% @ 50,000 Hrs
- Approval: Damp

BAFFLE INSERT

- Aluminum baffle inserts designed to cut glare and add aesthetic appeal, available in 4 finishes

BEAM CONTROL

- Deep cone shaped low iridescence aluminum reflectors available in Narrow, Medium & Wide

LIGHT DIFFUSER

- Located above the baffle insert and below the reflector, several different designs to optimize light control

ELECTRICAL APPROVAL




COMPLIANT

WARRANTY




SLIM 8" (SL8)

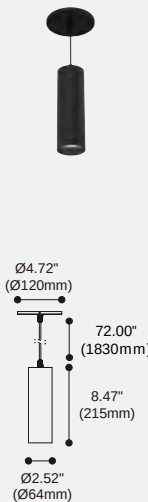


SLIM 13" (SLM13)




SLIM 18" (SL18)

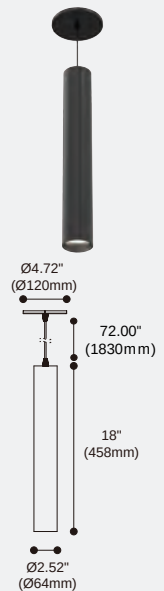


BROAD 6" (BR6)

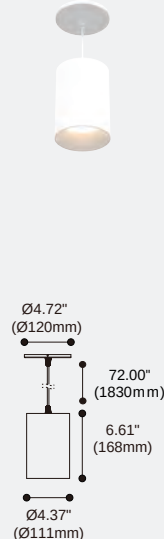

BROAD 10" (BR10)

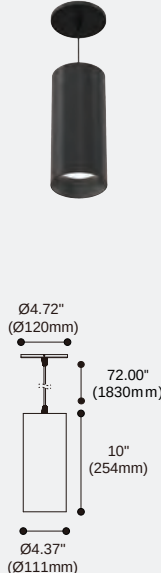

BROAD 18" (BR18)

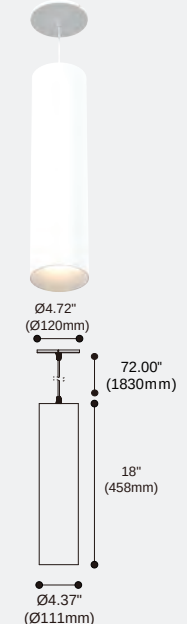

See Whiskey Photometrics on page 104 - 106

3 SELECT BAFFLE




4 SELECT DRIVER / MODULE WATTAGE

SLIM: 13W
BROAD: 13W or 26W

LED Driver Enclosed
Integral Driver,
One per module



5 SELECT CCT



6 SELECT REFLECTOR



7 SELECT DIFFUSER



ORDERING GUIDE CONFIGURATOR

WHS	MOUNT	1	2	3	4	5	6	7
WHISKEY	SUSPENSION	FINISH	CYLINDER SIZE	WHISKEY BAFFLE FINISH	WATTAGE	CCT	BEAM ANGLE	DIFFUSER
WHS	SU	01 BLACK	SL8 SLIM 8"	01 MATTE BLACK	13 13W	27	N 15°	CL CLEAR
		02 WHITE	SL13 SLIM 13"	02 MATTE WHITE	26 26W	30	M 24°	LN LINEAR SPREAD
			SL18 SLIM 18"	03 CHROME		35	W 38°	HC HONEYCOMB
			BR6 BROAD 6"	04 GOLD		40		FR FROSTED
			BR10 BROAD 10"					SP SOLITE
			BR18 BROAD 18"					

ORDERING GUIDE EXAMPLE 1:

Whiskey / Suspension / Black / Slim 13" / Chrome /
13W / 3000K / 38° Beam Angle / Clear Diffuser

CODE: **WHS-SU-01-SL13-03-13-30-W-CL**

WHISKEY

WALL MOUNT



Architectural Wall Mount Fixture

Whiskey LED Wall Mount Ordering Guide

1

SELECT FINISH



Matte
White



Matte
Black



Custom

2

SELECT CYLINDER SIZE

FEATURES

Whiskey family cylinders are remarkable in appearance and highly functional with designs to suit 3 applications, two diameters and three fixture lengths with multiple options to choose from, it's easy to find the right luminaire for your project. A robust yet elegant extruded aluminum body and powder coated finish make it ideal for commercial, residential or hospitality settings.

SPECIFICATIONS

FIXTURE BODY

- Extruded aluminum body powder coat painted 2.5" or 4.5" diameter
- Three lengths per diameter ranging from 7" to 18"
- Standard in white or black finish. Other finishes consult factory

MOUNTING

- Mounts over standard octagon box (canopy included)

POWER SUPPLY

- 13W 350mA or 26W 700mA Constant Current driver
- Dimming: TRIAC, ELV and 0-10V
- Concealed inside fixture body
- Minimum operating temp - 30°C

LED LIGHT MODULE

- High powered LED chip 15W 1260 Lumens or 26W 2030 Lumens
- Available in multiple CCT options
- Lumen Maintenance: 70% @ 50,000 Hrs
- Approval: Damp

BAFFLE INSERT

- Aluminum baffle inserts designed to cut glare and add aesthetic appeal, available in 4 finishes

BEAM CONTROL

- Deep cone shaped low iridescence aluminum reflectors available in Narrow, Medium & Wide

LIGHT DIFFUSER

- Located above the baffle insert and below the reflector, several different designs to optimize light control

ELECTRICAL APPROVAL




COMPLIANT


WARRANTY




SLIM 8" (SL8)




SLIM 13" (SLM13)




SLIM 18" (SL18)




BROAD 6" (BR6)



BROAD 10" (BR10)




BROAD 18" (BR18)



See Whiskey Photometrics on page 107 - 109

3 SELECT BAFFLE

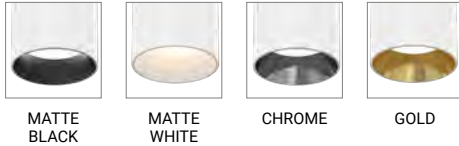

4 SELECT DRIVER / MODULE WATTAGE


SLIM: 13W
BROAD: 13W or 26W

LED Driver Enclosed
Integral Driver,
One per module




5 SELECT CCT


KELVIN OPTIONS



6 SELECT REFLECTOR



7 SELECT DIFFUSER



ORDERING GUIDE CONFIGURATOR

WHS	MOUNT	1	2	3	4	5	6	7
WHISKEY	WALL MOUNT	FINISH	CYLINDER SIZE	WHISKEY BAFFLE FINISH	WATTAGE	CCT	BEAM ANGLE	DIFFUSER
WHS	W	01 BLACK	SL8 SLIM 8"	01 MATTE BLACK	13 13W	27	N 15°	CL CLEAR
		02 WHITE	SL13 SLIM 13"	02 MATTE WHITE	26 26W	30	M 24°	LN LINEAR SPREAD
			SL18 SLIM 18"	03 CHROME		35	W 38°	HC HONEYCOMB
			BR6 BROAD 6"	04 GOLD		40		FR FROSTED
			BR10 BROAD 10"					SP SOLITE
			BR18 BROAD 18"					

ORDERING GUIDE EXAMPLE 1:

Whiskey / Wall Mount / Black / Slim 13" / Chrome / 13W / 3000K / 38° Beam Angle / Clear Diffuser

CODE: **WHS-W-01-SL13-03-13-30-W-CL**

ORDERING GUIDE EXAMPLE 2:

Whiskey / Wall Mount / White / Broad 10" / Gold / 13W / 4000K / 15° Beam Angle / Honey Comb Diffuser

CODE: **WHS-W-02-BR10-04-13-40-N-HC**

ORDERING GUIDE EXAMPLE 3:

Whiskey / Wall Mount / Black / Broad 18" / Matte White / 26W / 4000K / 15° Beam Angle / Honey Comb Diffuser


CODE: **WHS-W-01-BR18-01-26-40-N-HC**

W H I S K E Y


L I G H T P H O T O M E T R I C S

13W SURFACE MOUNT (SLIM)


13W NARROW CLEAR - SLIM

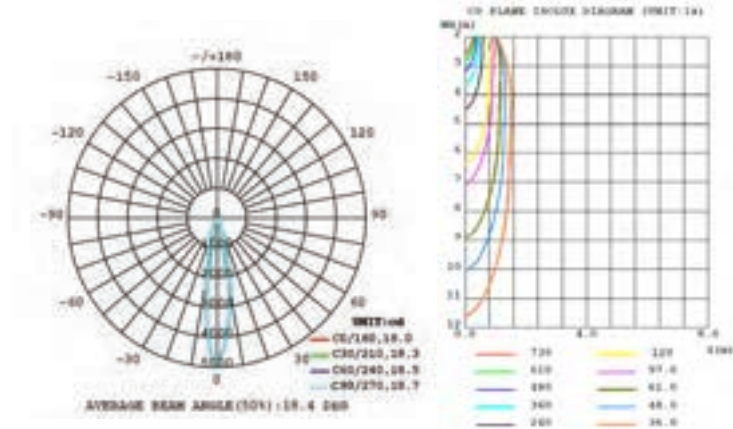

13W MEDIUM CLEAR - SLIM

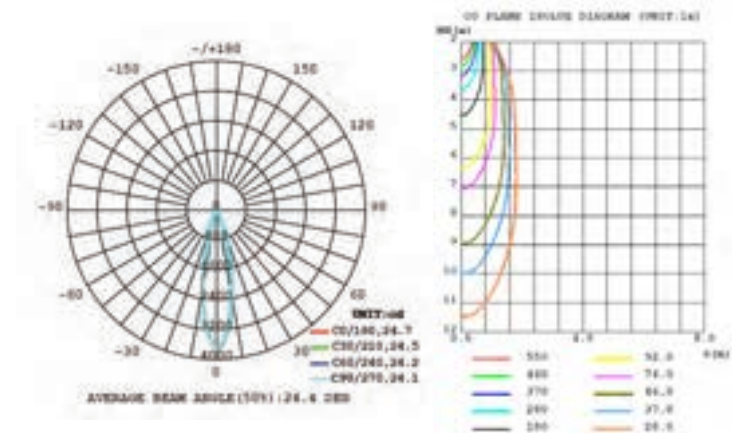


13W WIDE CLEAR - SLIM

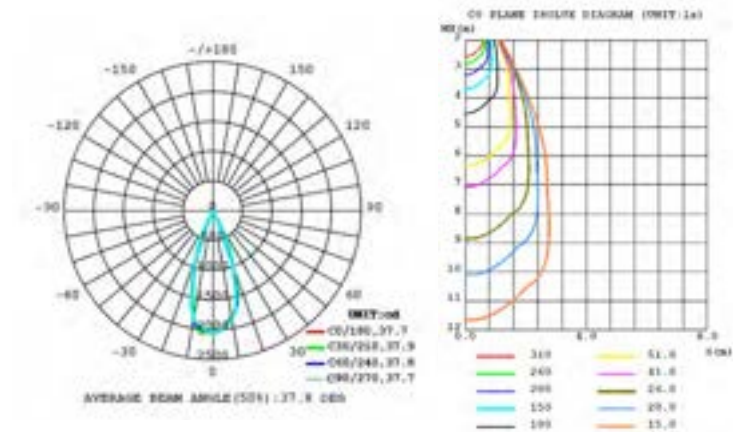


13W SURFACE MOUNT (BROAD)


13W NARROW CLEAR - BROAD

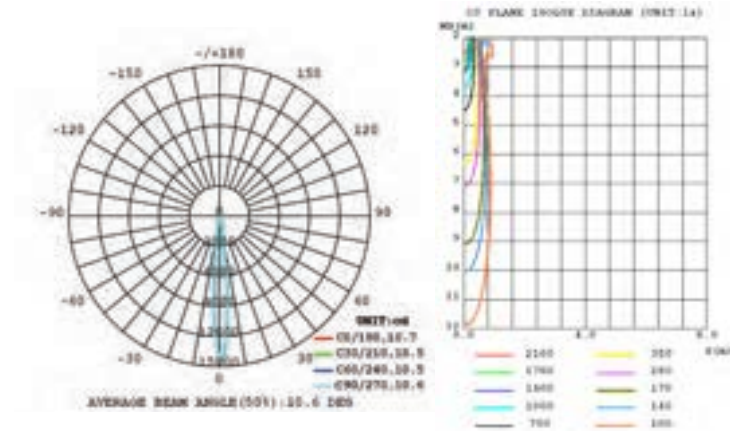

13W MEDIUM CLEAR - BROAD

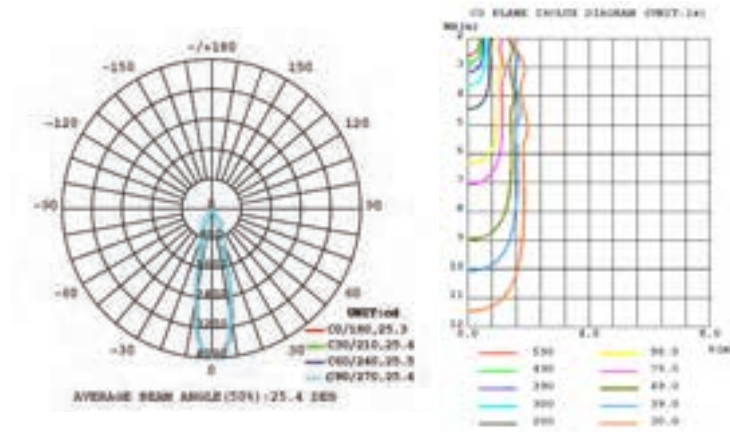


13W WIDE CLEAR - BROAD

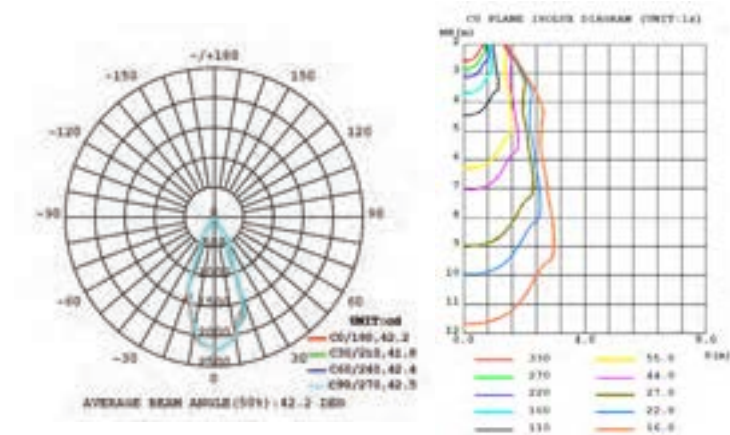


26 W SURFACE MOUNT (BROAD)


26W NARROW CLEAR - BROAD

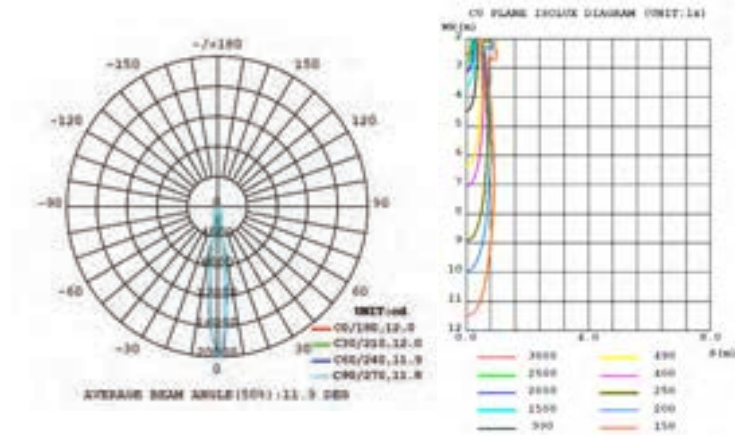

26W MEDIUM CLEAR - BROAD

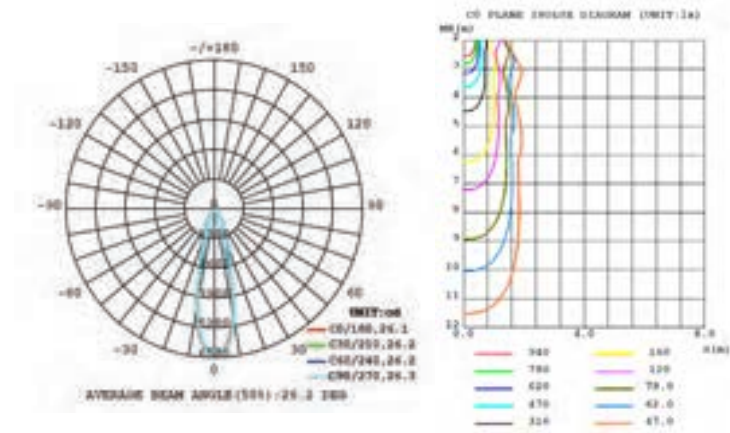


26W WIDE CLEAR - BROAD

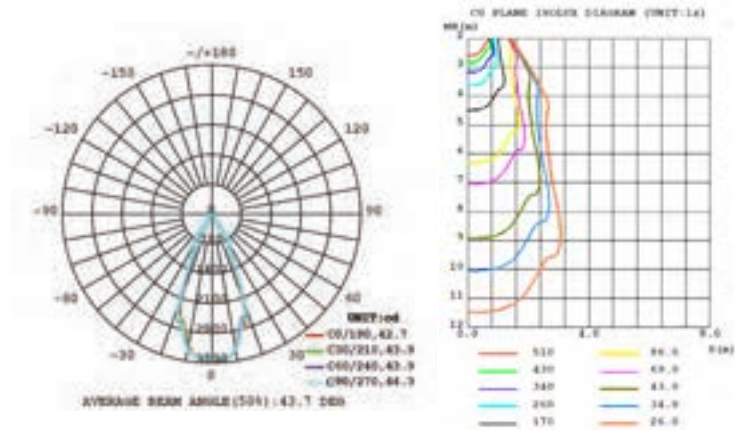


13 W S U S P E N S I O N (S L I M)


13W NARROW CLEAR - SLIM

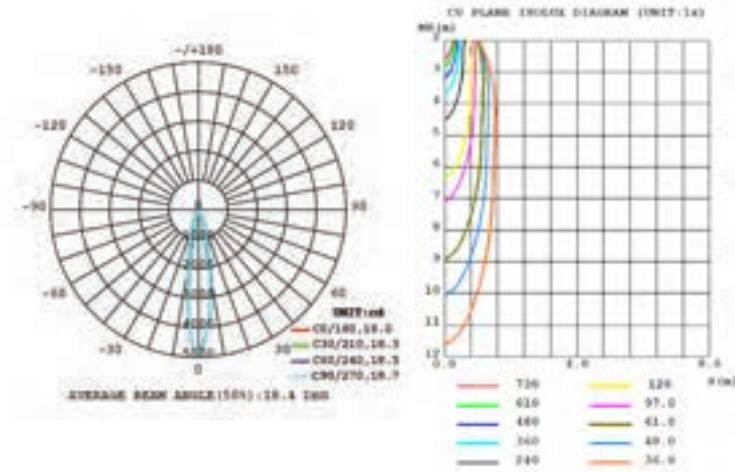

13W MEDIUM CLEAR - SLIM

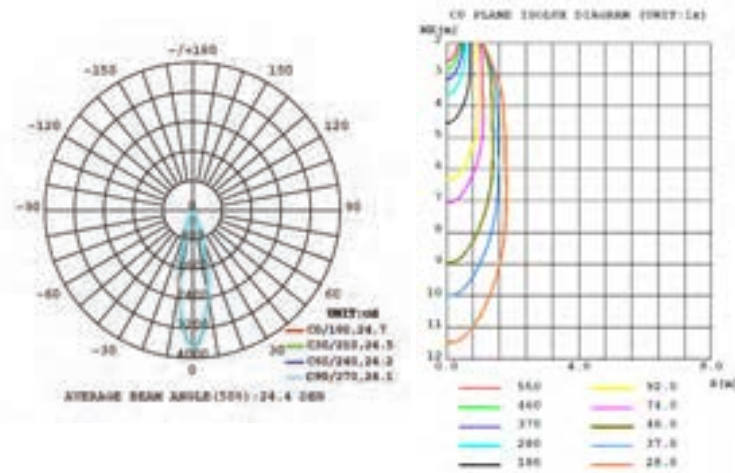


13W WIDE CLEAR - SLIM

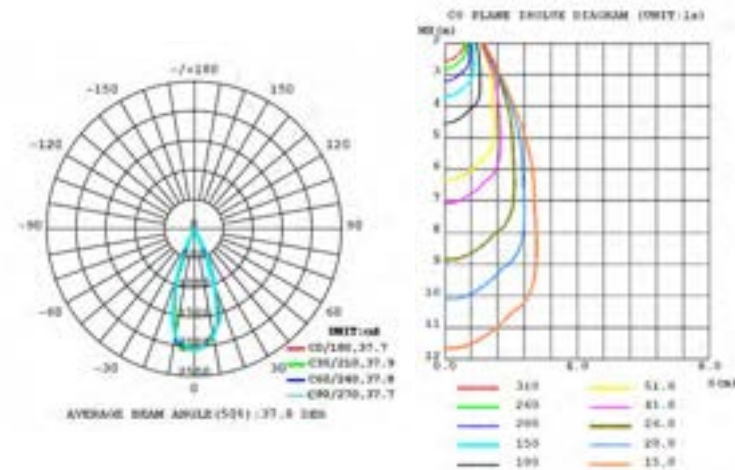


13W SUSPENSION (BROAD)


13W NARROW CLEAR - BROAD

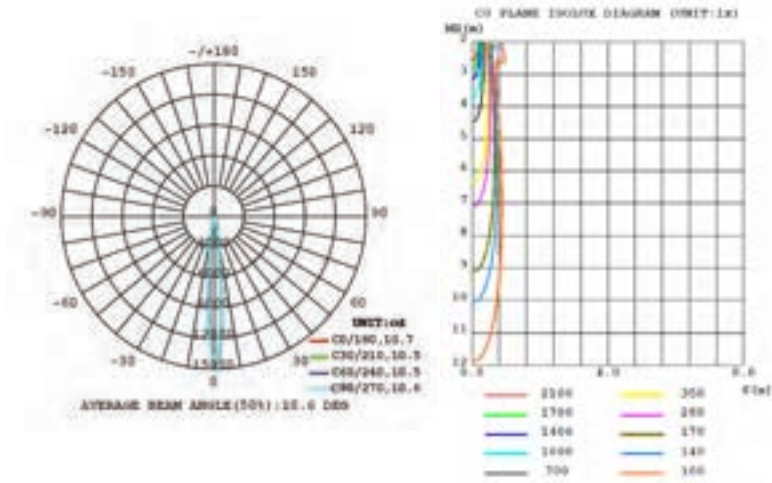

13W MEDIUM CLEAR - BROAD

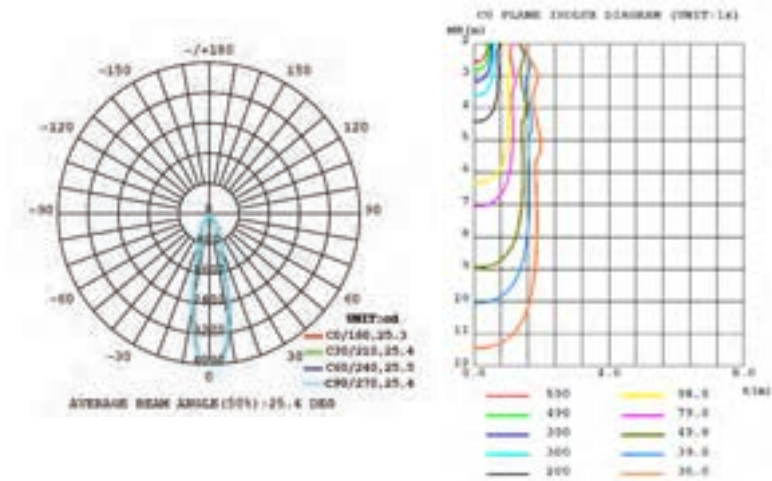


13W WIDE CLEAR - BROAD

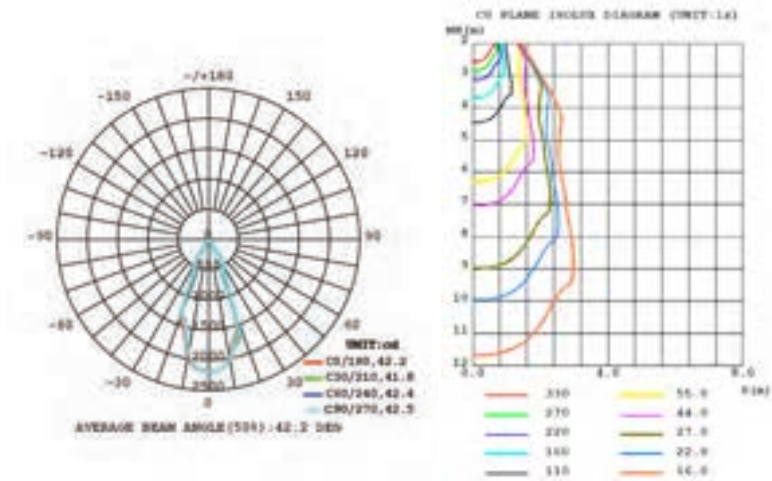


26 W S U S P E N S I O N (B R O A D)


26W NARROW CLEAR - BROAD

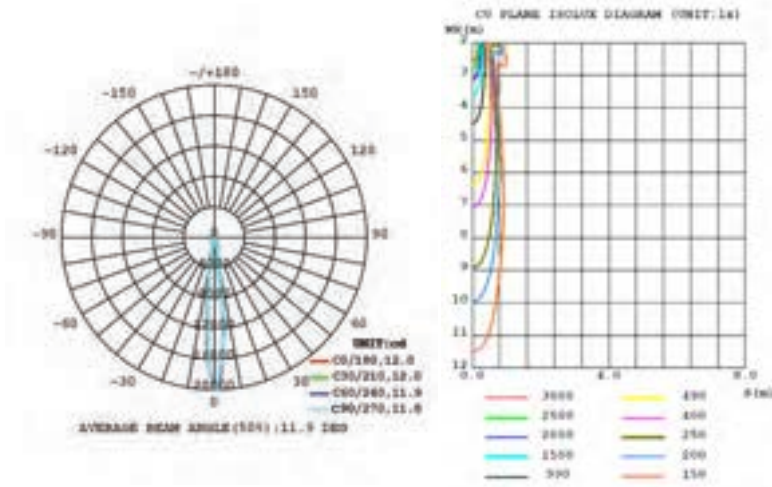

26W MEDIUM CLEAR - BROAD

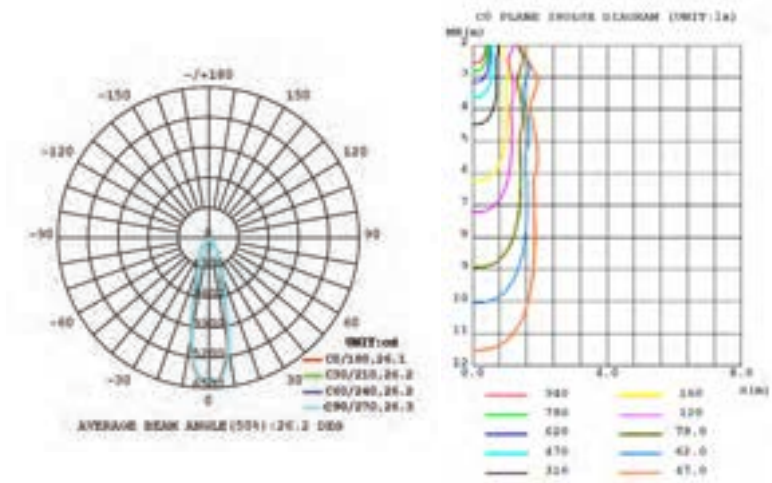


26W WIDE CLEAR - BROAD

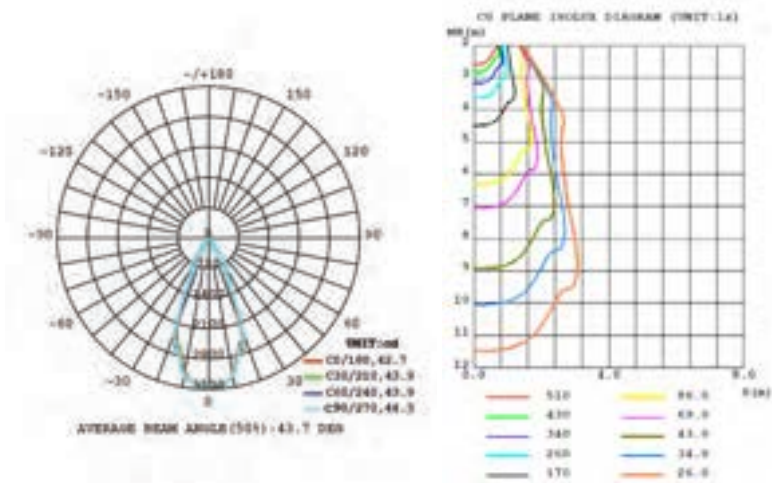


13W WALL MOUNT (SLIM)


13W NARROW CLEAR - SLIM

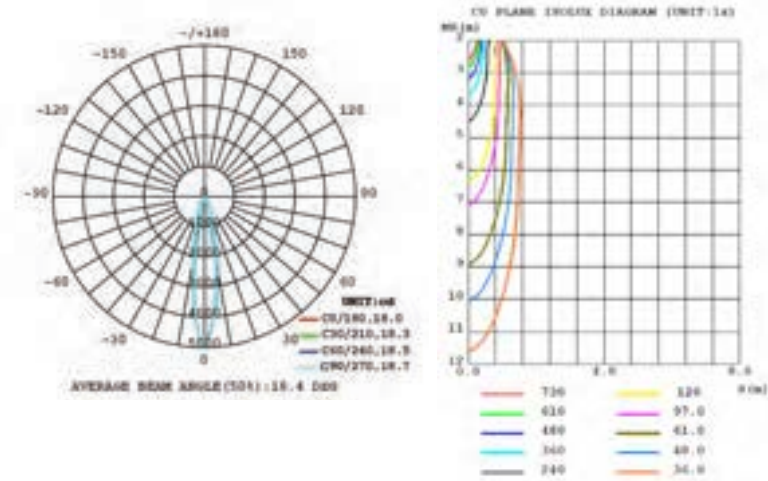

13W MEDIUM CLEAR - SLIM

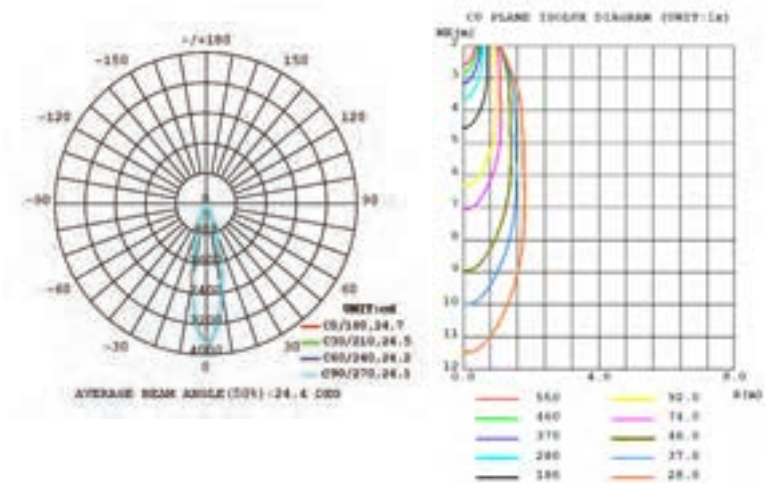


13W WIDE CLEAR - SLIM

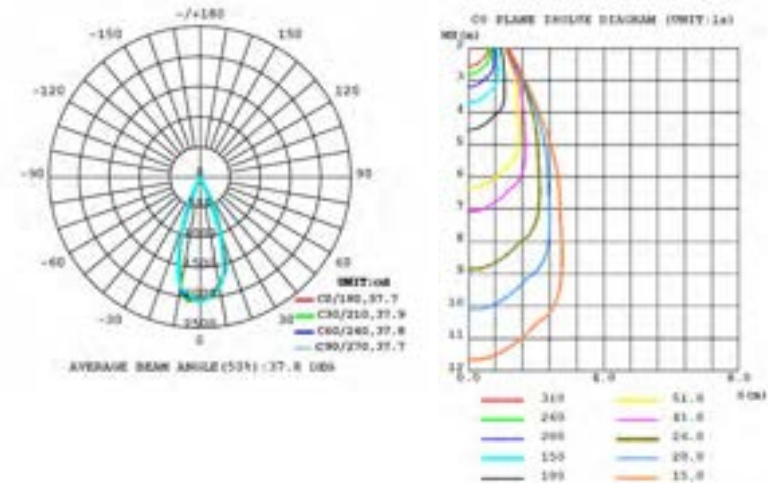


13W WALL MOUNT (BROAD)


13W NARROW CLEAR - BROAD

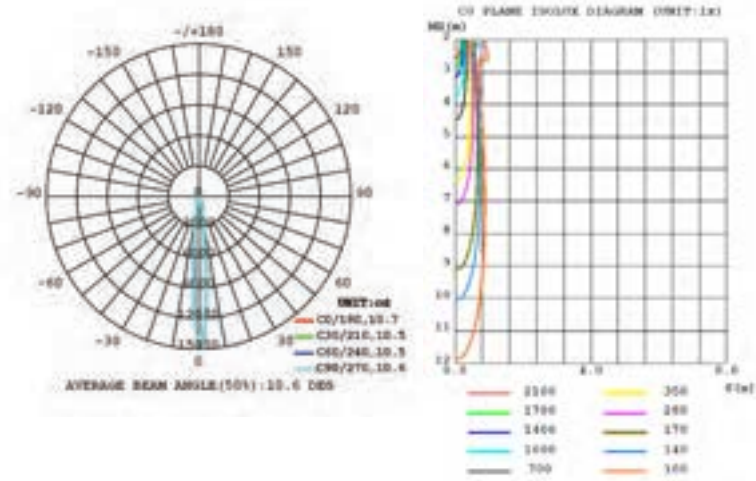

13W MEDIUM CLEAR - BROAD

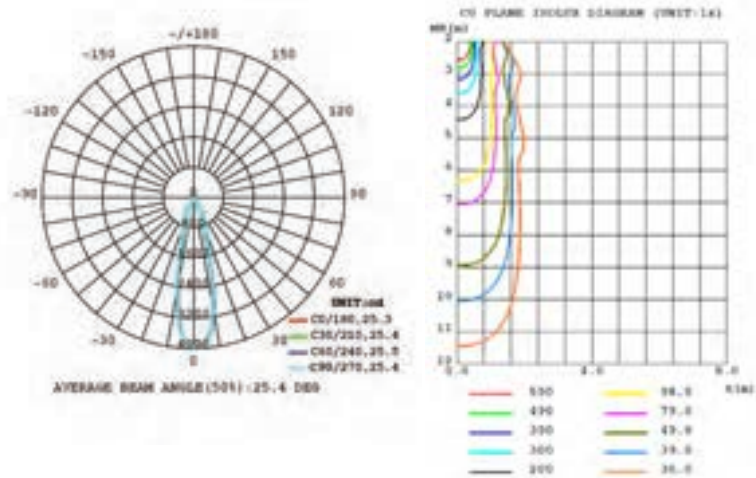


13W WIDE CLEAR - BROAD

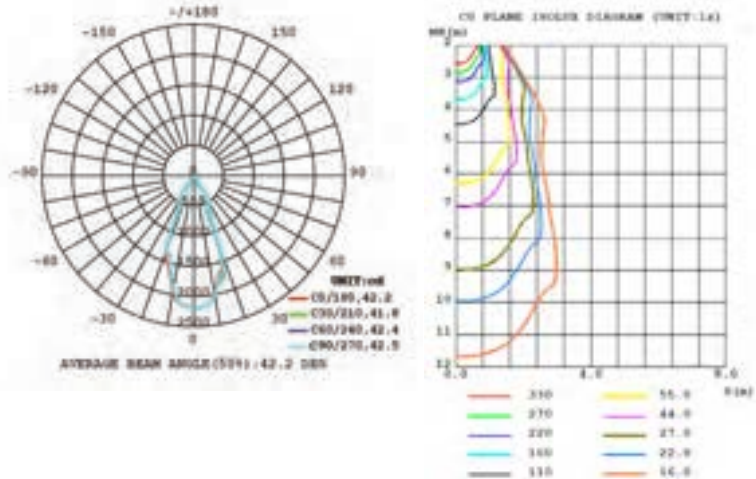


26W WALL MOUNT (BROAD)


26W NARROW CLEAR - BROAD

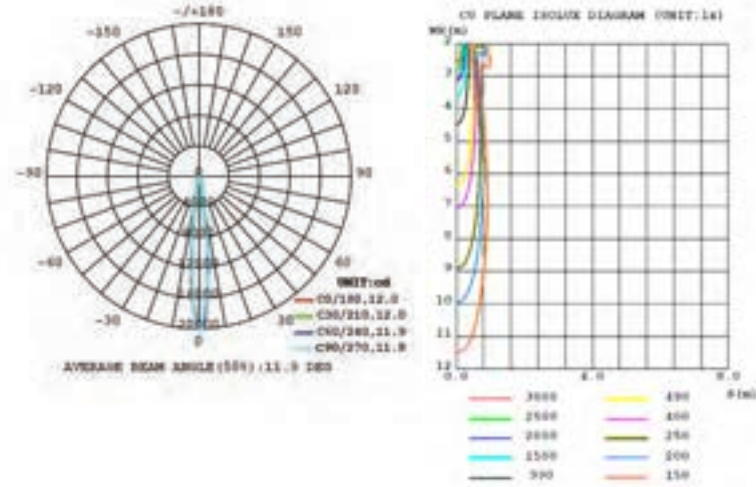

26W MEDIUM CLEAR - BROAD

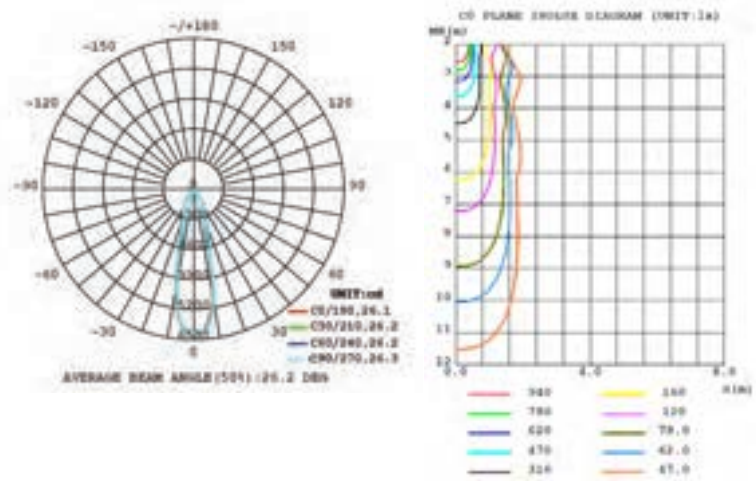

26W WIDE CLEAR - BROAD

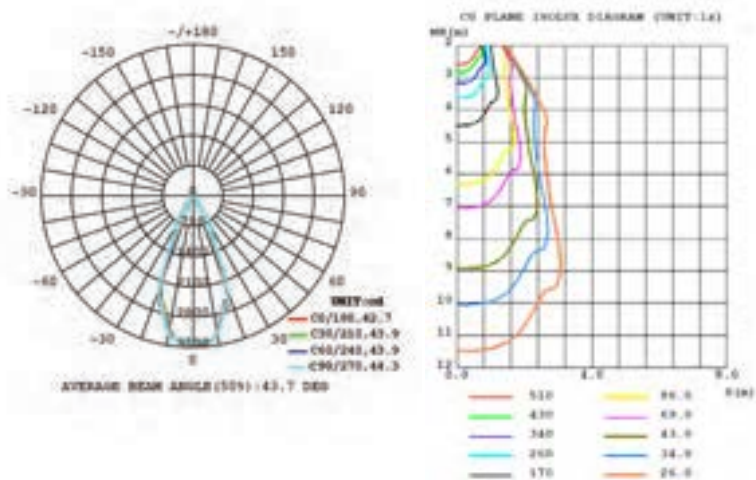



SUBTRACKT

The Subtrackt Family is an above ceiling track lighting system consisting of non-electrical aluminum channels, traditional H-Track and light fixtures. The channels are installed above the ceiling through the pre-cut troughs and blend gracefully into the drywall ceiling. These troughs are formed depending on the length and shape of desired runs which are job specific. Adjacent to the channels is the H-Track that draws power from the end feed. The light fixture mounts on the non-electrical aluminum channel but draws power from a cable adapter which is connected to the traditional live H-style Track.

The Subtrackt light heads are available in 15W or 26W and are highly versatile in both how they can be mounted and their range of motion with their 4 pivot points. With its state of the art design and stunning high powered fixtures the Subtrackt family truly redefines lighting from above.



ABOVE CEILING LED TRACK LIGHTING SYSTEM

PAGE 113




PAGE 113




Channel & Track Components

Non-electrical aluminum mounting channels

LINEAR ALUMINUM CHANNEL

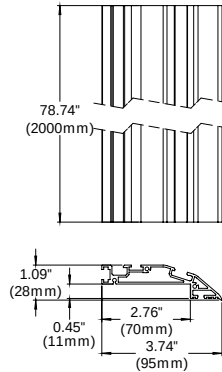

SQUARE ALUMINUM CHANNEL

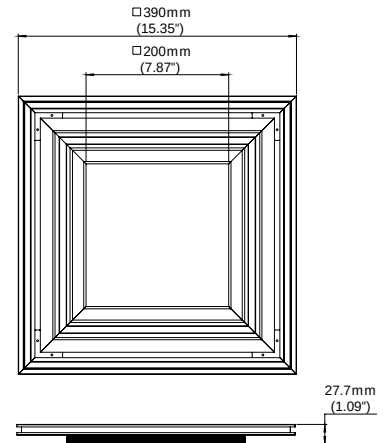

Linear Aluminum Channel	38653-01	Black	6.5FT
	38653-02	White	6.5FT
Square Aluminum Channel	41900-01	Black	15.35"
	41900-02	White	15.35"

***Field Cuttable**

Electrical H-Style track

- Single circuit track, 3-conductor, 20A maximum per circuit
- Can be surface mounted on walls or ceilings
- Field cuttable to desired length
- Use components to build any desired configuration
- Includes 2 dead-end covers

1002-01	Black	2FT
1002-02	White	2FT
1004-01	Black	4FT
1004-02	White	4FT
1008-01	Black	8FT
1008-02	White	8FT

Connectors



Use with appropriate electrical connector to feed power at track end
Can be fed from the back or top

1617-01	White
1617-02	Black



Mini Connector

Joins two tracks mechanically and electrically

1560-01	White
1560-02	Black



L Connector


For joining two tracks at a 90° angle and feeding power
Allows independent feed or same circuit
Polarized and pre-wired

1530-01	White
1530-02	Black

***Field Cuttable**




15W Subtrackt LED Light Head

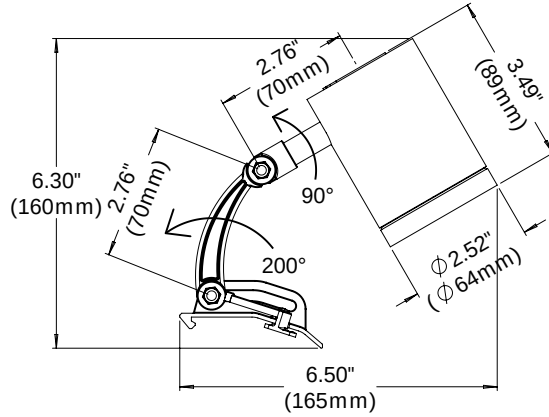

SPECIFICATIONS

Construction:	Diecast aluminum body
Wattage:	15W Integrated LED
Lumens:	1380 Lumens
Input Voltage:	120V
Beam Angle:	40°
Vertical Rotation:	90°/200°
Horizontal Rotation:	130°
Kelvin:	2700K/3000K/3500K/4000K
CRI:	90+
Dimming:	TRIAC/ELV/0-10V
Adjustable Head:	Yes
Approval:	Dry
Color Finish Options:	☐ White ☒ Black
Electrical Approval:	COMPLIANT
Warranty:	

CUT HOLE: 6" minimum

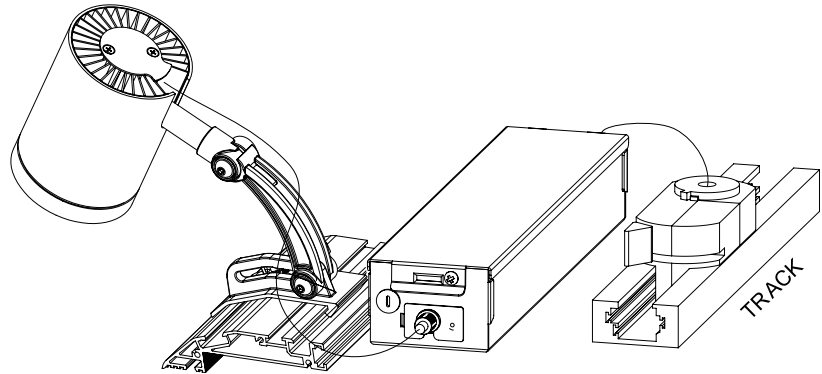


COMPLETE SUBTRACKT 15W ORDERING GUIDES

ITEM	CCT	BEAM ANGLE	FINISH
38656	27 2700K	4 40°	01 MATTE BLACK
	30 3000K		02 MATTE WHITE
	35 3500K		
	40 4000K		

ORDERING GUIDE EXAMPLE:
38656 / 3500K / 40° Beam Angle / Matte Black
CODE: **38656-35-4-01**


30W Subtrackt LED Light Head

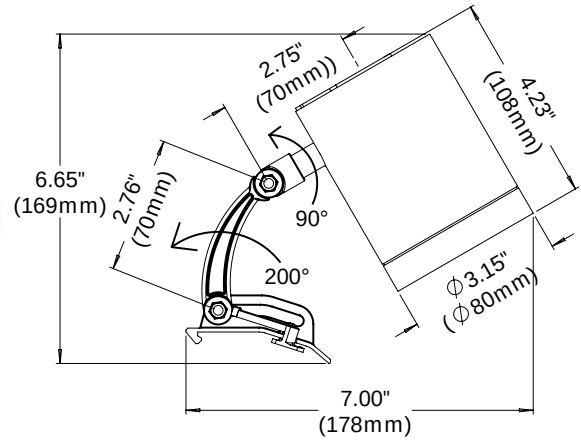

CUT HOLE: 7.5" minimum

SPECIFICATIONS

Construction:	Diecast aluminum body,
Wattage:	30W Integrated LED
Lumens:	2670 Lumens
Input Voltage:	120V
Beam Angle:	40°
Vertical Rotation:	90°/200°
Horizontal Rotation:	130°
Kelvin:	3000K/3500K/4000K
CRI:	90+
Dimming:	TRIAC/ELV/0-10V
Adjustable Head:	Yes
Approval:	Dry
Color Finish Options:	☐ White ☒ Black
Electrical Approval:	   COMPLIANT
Warranty:	

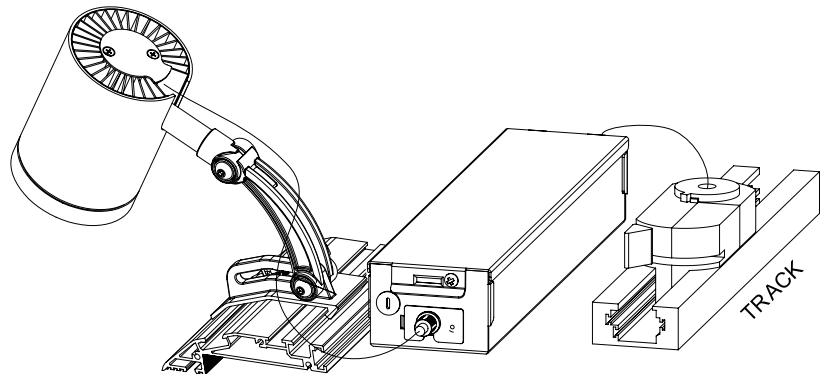

COMPLETE SUBTRACKT 30W ORDERING GUIDES


ITEM	CCT	BEAM ANGLE	FINISH
38657	30	3000K	4 40° 01 MATTE BLACK
	35	3500K	02 MATTE WHITE
	40	4000K	

ORDERING GUIDE EXAMPLE:
38657 / 4000K / 40° Beam Angle / Matte White
CODE: 38657-40-4-02

SUBTRACK

FUNCTIONALITIES

SAMPLE APPLICATIONS

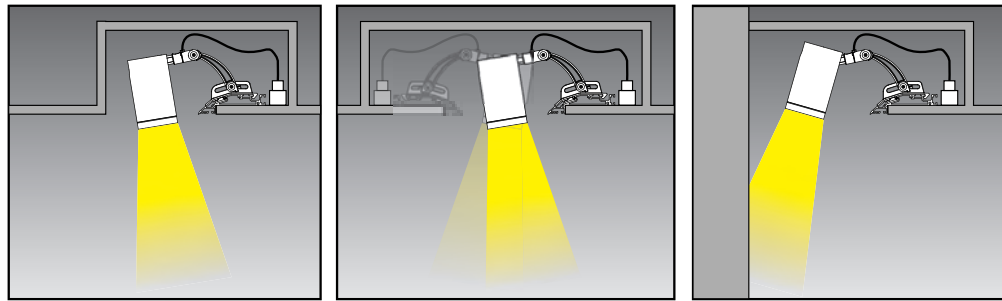


SINGLE

DOUBLE

GRAZER

4-WAY MOVEMENTS

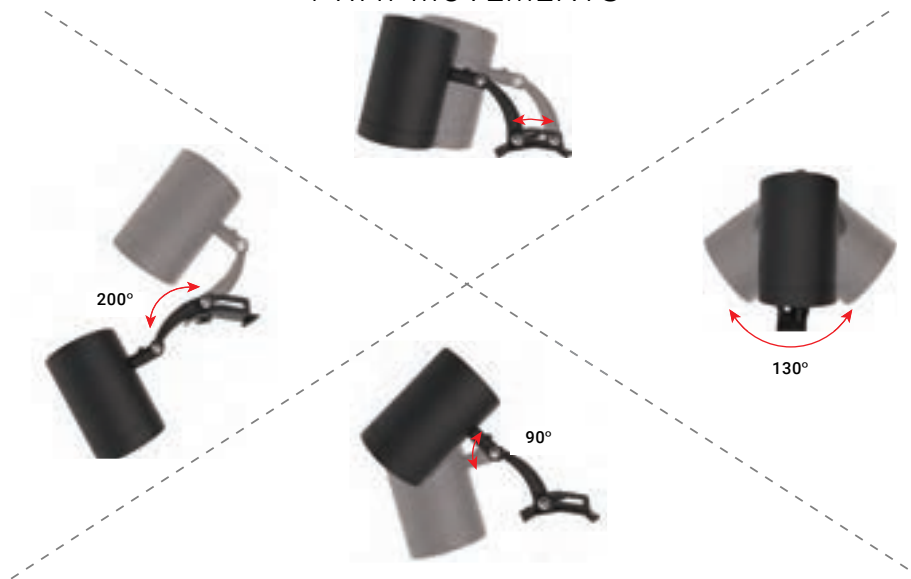

Need Help?

Follow 2 simple steps:

1. Identify the length and shape of each aluminum run desired
2. Choose which lighting fixture and how many to be used on each run

Email sales@eurofase.com for further inquiries

EXAMPLE RUN 1

One 12 ft. straight channel run in black with 6 x 38656-30-4-01





EXAMPLE RUN 2

One 12' x 18' rectangle in white with 14 x 38657-30-4-02

SUBTRACK

INSTALLATION GUIDE


SERIES	A	B	C	D
38656	Minimum.11 3/4"(300mm)	Minimum.6"(150mm)	1/2"(12mm)	Minimum.8 5/8"(220mm)
38657	Minimum.11 3/4"(300mm)	Minimum.7 1/2"(190mm)	1/2"(12mm)	Minimum.8 5/8"(220mm)

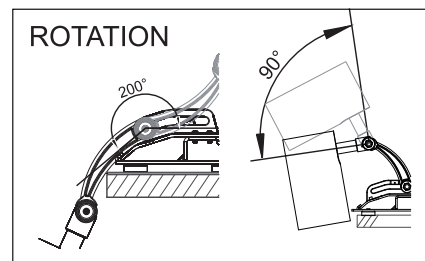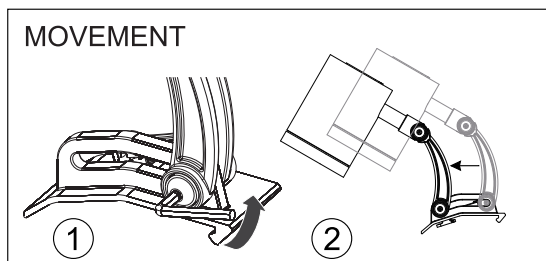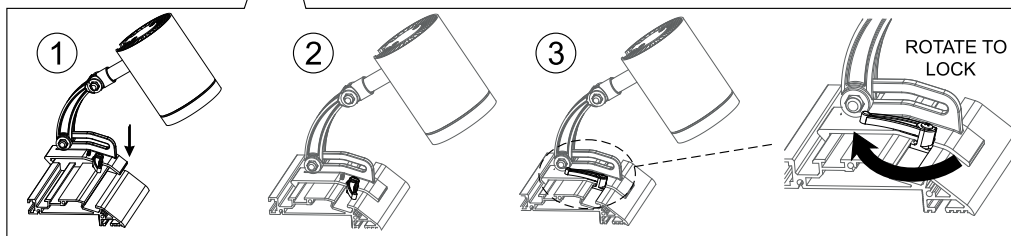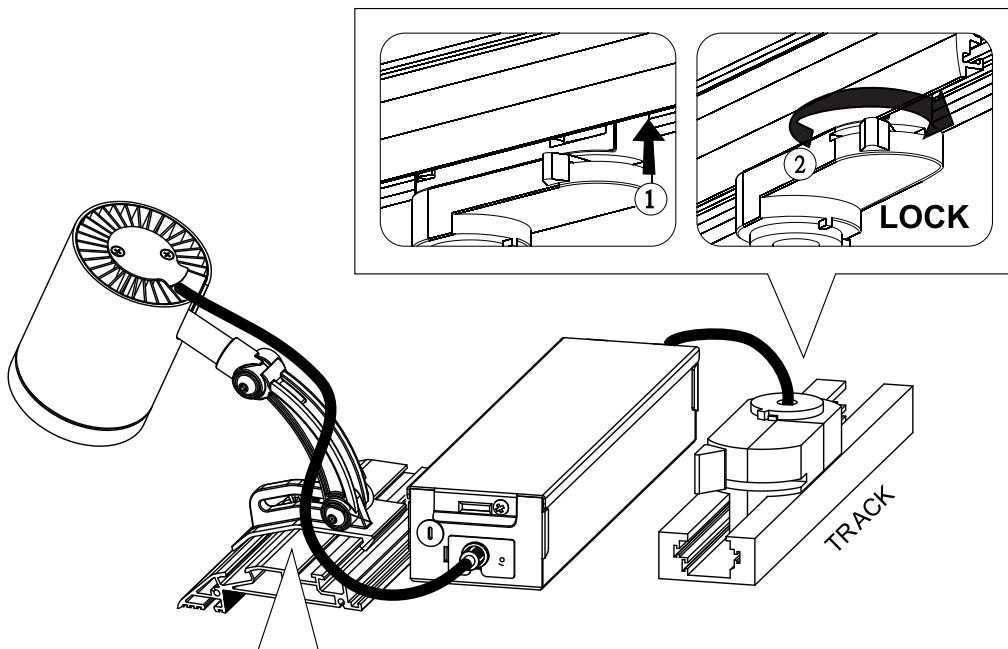


SUBTRACT

LIGHT PHOTOMETRICS

15W LED LIGHT HEAD

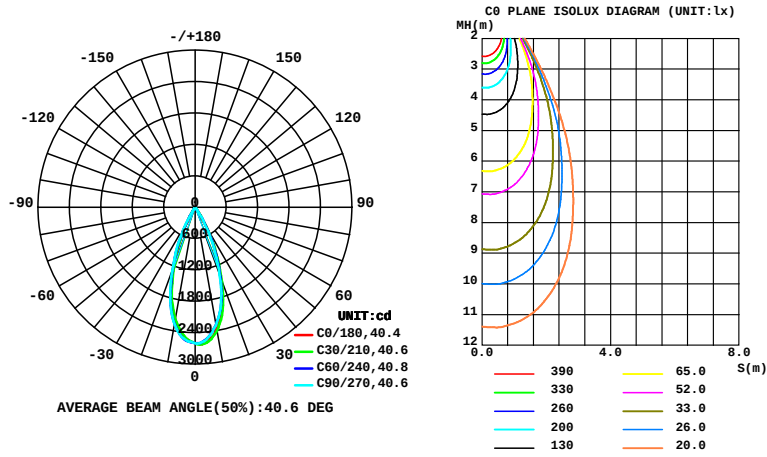

30W LED LIGHT HEAD

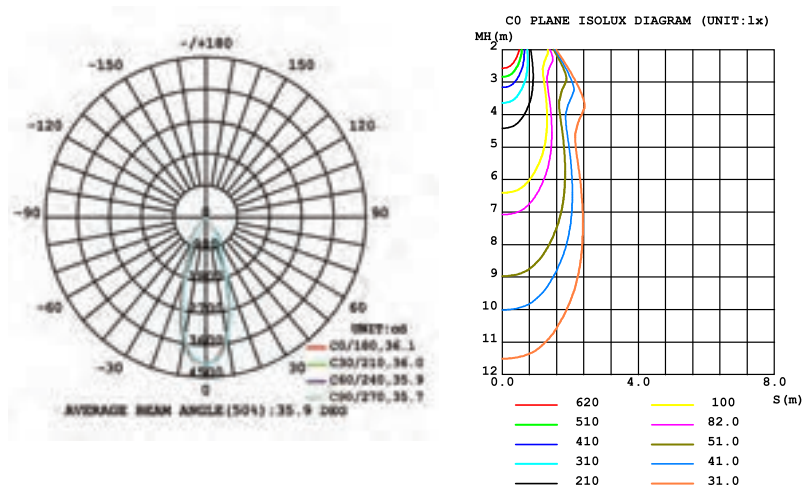



FOCUS

Focus stays true to the conventional style of track lighting and incorporates a simplistic, modern style. Made out of 1070 pure aluminum, it is built to last with durable strength like no other. A special machined rotating front bezel feature controls beam spread from its double bifocal lenses. This allows the beam to change from 15° to 55° with maximum uniformity.

Available in both a matte black and white finish, the Focus family will easily match a variety of décor for consistent style. Allow us to help you focus on what truly matters.



FIELD BEAM ADJUSTABLE LED TRACK FIXTURES

PAGE 125



FOCUS 14W

PAGE 127



FOCUS 29W

FOCUS



Vertical Rotation: **90°**

Horizontal Rotation: **350°**

The spot module is the best choice for directional lighting to highlight specific pieces that deserve that extra attention. Each movement is decisive with discreet luxury. Detail is essential. Specific to the Focus collection is a field adjustable aperture ring which controls the beam angle, zooming and focusing between 20° - 55°, 15° - 45°, functioning similarly to that of a DSLR camera.

Aperture Adjustability: **20°**



55°





FOCUS

14W LED Track Head

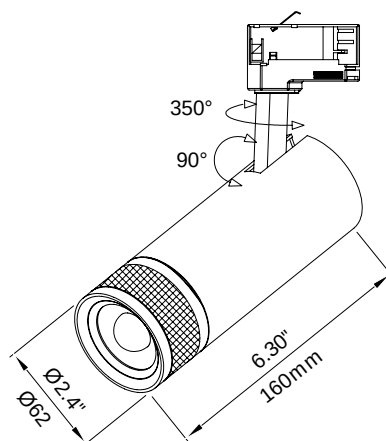

SPECIFICATIONS

Light Source:	14W Integrated LED
Beam Angle:	20° - 55° adjustable
Vertical Rotation:	90°
Horizontal Rotation:	350°
Kelvin:	3000K/3500K/4000K
Lumens:	820-1120 Lm
CRI:	90+
Dimming:	TRIAC
Color:	Black/White
Compatibility:	H-Style Track

Electrical Approval:



Warranty:



COMPLETE FOCUS 14W ORDERING GUIDES

ITEM	CCT	FINISH
39713	30 3000K	01 BLACK
	35 3500K	02 WHITE
	40 4000K	

ORDERING GUIDE EXAMPLE:
39713 / 4000K / Black
CODE: **39713-40-01**

OPTIONAL ACCESSORY



HONEY COMB LOUVRE



ITEM	FINISH	EXTENSION
39757	01 BLACK	018

ORDERING GUIDE EXAMPLE:
39757 / Black
CODE: **39757-01-018**



FOCUS

29W LED Track Head

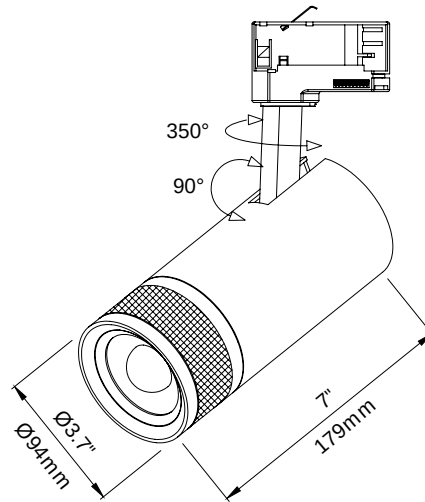

SPECIFICATIONS

Light Source:	29W Integrated LED
Beam Angle:	15° - 45° adjustable
Vertical Rotation:	90°
Horizontal Rotation:	350°
Kelvin:	3000K/3500K/4000K
Lumens:	1655-2165 Lm
CRI:	90+
Dimming:	TRIAC
Color:	Black/White
Compatibility:	H-Style Track

Electrical Approval:



Warranty:



COMPLETE FOCUS 29W ORDERING GUIDES

ITEM	CCT	FINISH
39714	30 3000K	01 BLACK
	35 3500K	02 WHITE
	40 4000K	

ORDERING GUIDE EXAMPLE:
39714 / 4000K / Black
CODE: **39714-40-01**

OPTIONAL ACCESSORY



HONEY COMB LOUVRE

ITEM	FINISH	EXTENSION
39757	01 BLACK	018

ORDERING GUIDE EXAMPLE:
39757 / Black
CODE: **39757-01-018**





FOCUS



LIGHT PHOTOMETRICS

14W / 3500K LED LIGHT HEAD

14W - 3500K - 20°

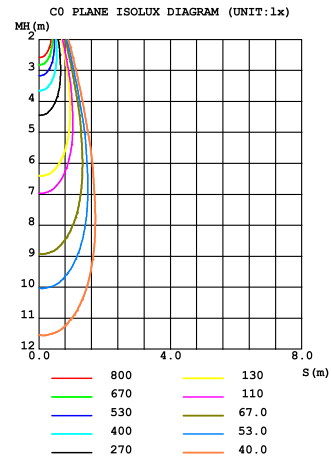
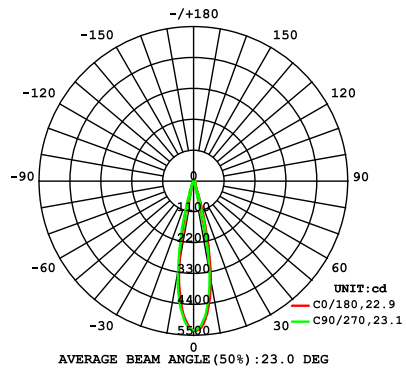


14W - 3500K - 55°

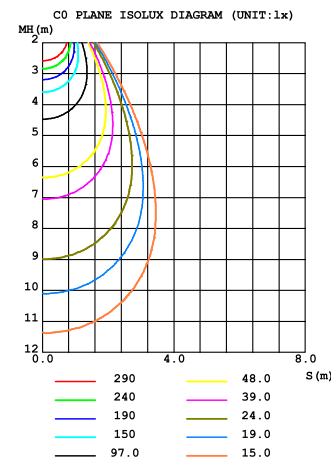
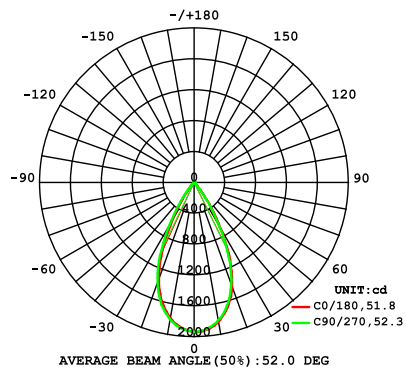


29W / 3000K LED LIGHT HEAD

29W - 3000K - 15°

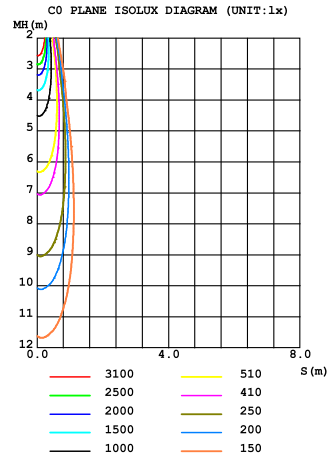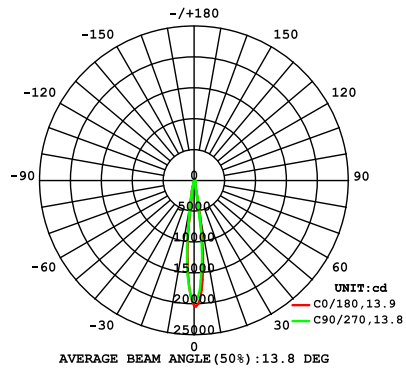

29W - 3000K - 45°

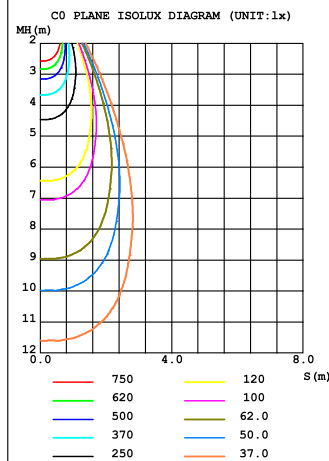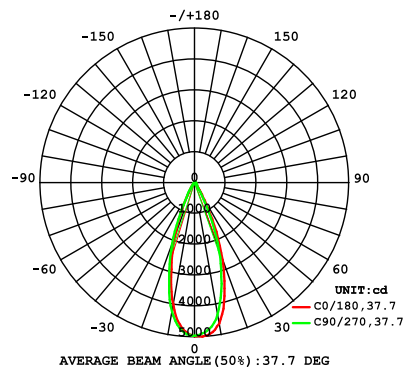


FOCUS


LIGHT PHOTOMETRICS

29 W / 3500 K LED LIGHT HEAD

29W - 3500K - 15°

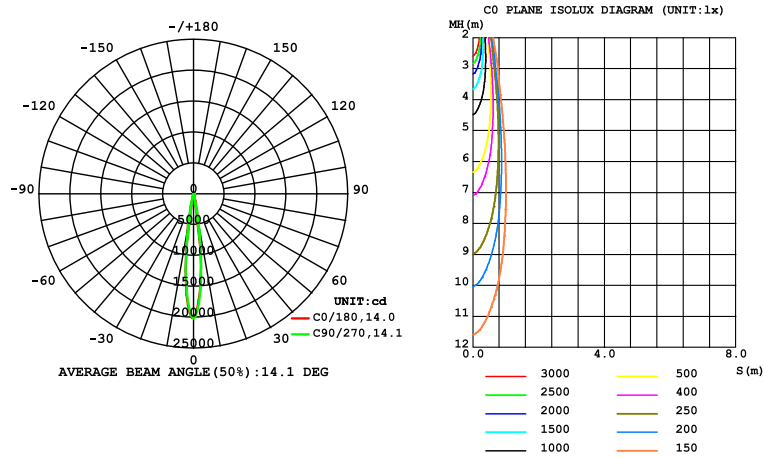

29W - 3500K - 45°

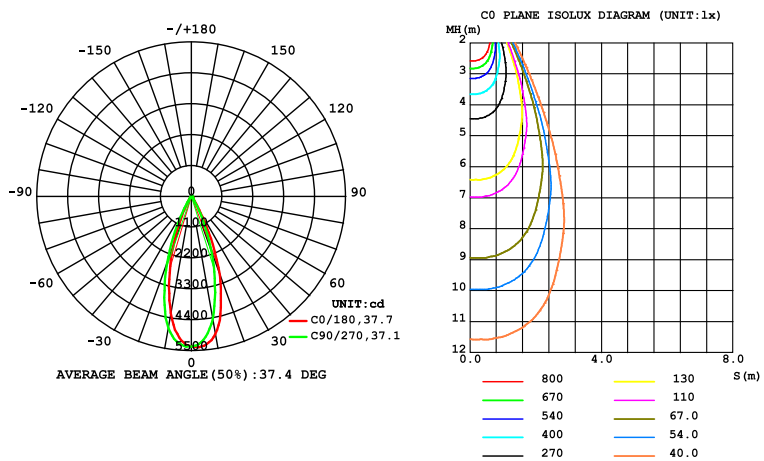

CHARLIE

Charlie stays true to the conventional style of track lighting systems and incorporates a simplistic, modern style. Made out of diecast aluminum, it is built to last with durable strength like no other.

Available in both a matte black and white finish, the Charlie collection will easily match a variety of décor for consistent style.



C H A R L I E

LED TRACK FIXTURES

PAGE 135



CHARLIE 7W

PAGE 137



CHARLIE 15W


PAGE 139




CHARLIE 30W

CHARLIE

7W LED Track Head

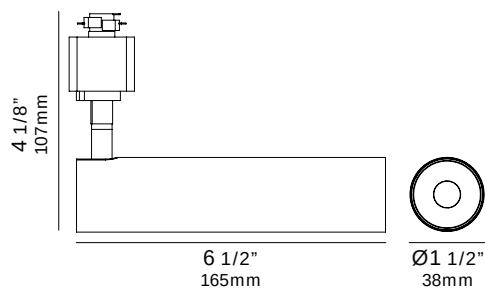

**VERTICAL
& HORIZONTAL
ROTATIONS**



SPECIFICATIONS

Light Source:	7W Integrated LED
Beam Angle:	24°
Vertical Rotation:	90°
Horizontal Rotation:	350°
Kelvin:	3000K/3500K
Lumens:	540 Lm
CRI:	90+
Dimming:	TRIAC
Color:	Black/White
Input:	120V
Compatibility:	H-Style Track

Electrical Approval:



COMPLIANT

Warranty:



COMPLETE CHARLIE 7W ORDERING GUIDES


ITEM	CCT		FINISH	
35457	30	3000K	01	BLACK
	35	3500K	02	WHITE

ORDERING GUIDE EXAMPLE:
35457 / 3000K / Black
CODE: **35457-30-01**




CHARLIE

15W LED Track Head

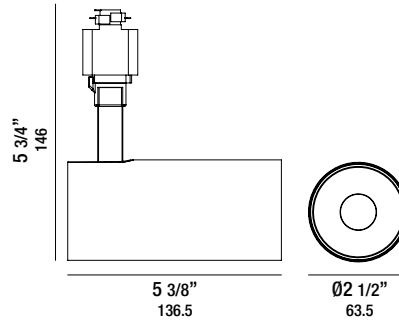

**VERTICAL
& HORIZONTAL
ROTATIONS**



SPECIFICATIONS

Light Source:	15W Integrated LED
Beam Angle:	30°
Vertical Rotation:	90°
Horizontal Rotation:	350°
Kelvin:	3000K/3500K
Lumens:	1380 Lm
CRI:	90+
Dimming:	TRIAC
Color:	Black/White
Input:	120V
Compatibility:	H-Style Track

Electrical Approval:



COMPLIANT

Warranty:



COMPLETE CHARLIE 15W ORDERING GUIDES


ITEM	CCT		FINISH	
35456	30	3000K	01	BLACK
	35	3500K	02	WHITE

ORDERING GUIDE EXAMPLE:
35456 / 3000K / Black
CODE: **35456-30-01**




CHARLIE

30W LED Track Head

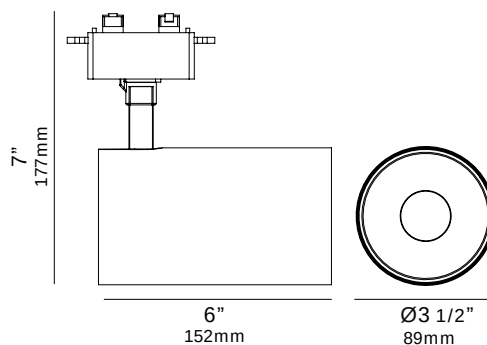

**VERTICAL
& HORIZONTAL
ROTATIONS**



SPECIFICATIONS

Light Source:	30W Integrated LED
Beam Angle:	30°
Vertical Rotation:	90°
Horizontal Rotation:	350°
Kelvin:	3000K/3500K/4000K
Lumens:	2670 Lm
CRI:	90+
Dimming:	TRIAC
Color:	Black/White
Input:	120V
Compatibility:	H-Style Track

Electrical Approval:



COMPLIANT

Warranty:






ITEM	CCT	FINISH
35455	30 3000K	01 BLACK
	35 3500K	02 WHITE
	40 4000K	

ORDERING GUIDE EXAMPLE:
35455 / 3500K / Black
CODE: **35455-35-01**




3000K LED TRACK HEAD

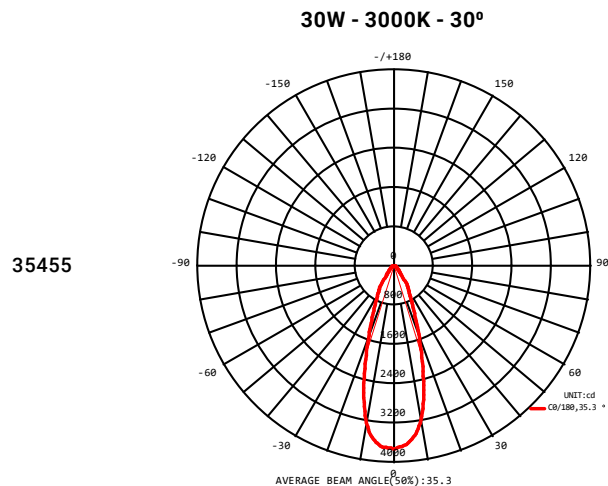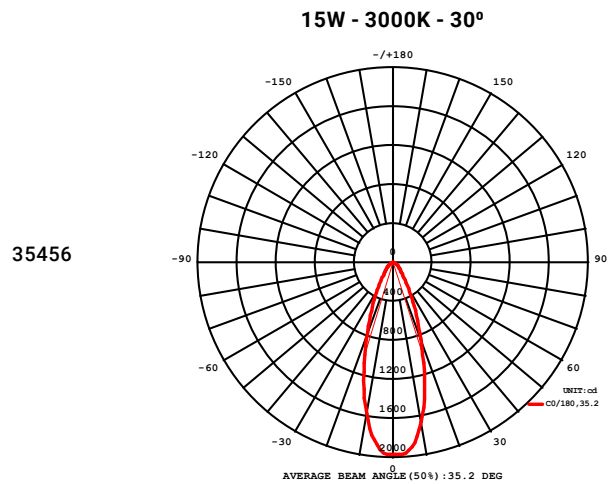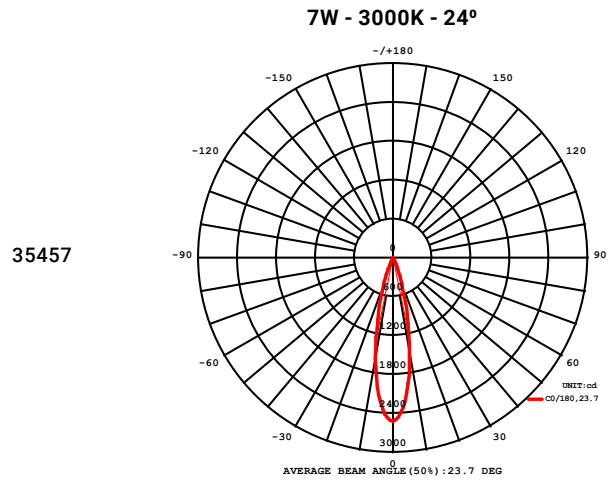



MODULAR TRACK

- Versatile and adaptable, modular lighting allows you to configure a lighting scheme that is custom configured to your needs
- Allows for placing track lights anywhere on the track where light is desired
- Field-cuttable track sections are combined with feeds and joiners making virtually any configuration possible

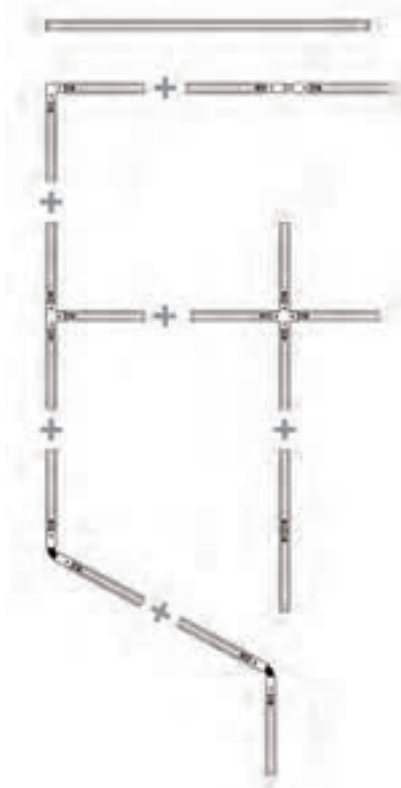

POWER CONNECTION H-STYLE TRACK

- Single circuit track, 3-conductor, 20A maximum per circuit
- Can be surface mounted on walls or ceilings
- Field cuttable to desired length
- Use components to build any desired configuration
- Includes 2 dead-end covers

1002-01	Black	2FT
1002-02	White	2FT
1004-01	Black	4FT
1004-02	White	4FT
1008-01	Black	8FT
1008-02	White	8FT




ACCESSORIES

FLOATING CANOPY

- Mounts on any point along the track
- Feeds power and covers outlet box

ITEM# FINISHES
1615 -01 ○ -02 ●

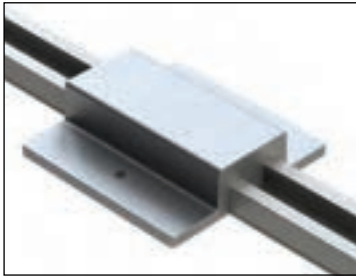

MINI CONNECTOR

- Joins two tracks mechanically and electrically
- Power cannot be fed


ITEM# FINISHES
1560 -01 ○ -02 ●



T CONNECTOR

- For joining three tracks in "T" configuration and feeding power
- Allows independent feed or same circuit.
- Polarized and pre-wired

ITEM# FINISHES
1540 -01 ○ -02 ●

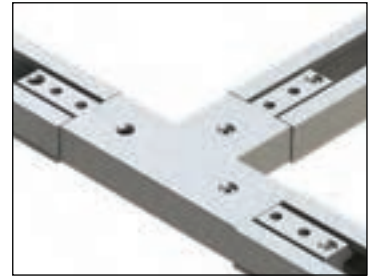

LIVE END CONNECTOR

- For feeding track mounted flush to surface without outlet box or canopy

ITEM# FINISHES
1510 -01 ○ -02 ●



FLEXIBLE CONNECTOR

- For joining two tracks in a variable angle 0 to 90 degrees and feeding power

ITEM# FINISHES
1570 -01 ○ -02 ●



X CONNECTOR

- For joining three tracks in an "X" configuration and feeding power
- Allows independent feed or same circuit
- Polarized and pre-wired

ITEM# FINISHES
1550 -01 ○ -02 ●



LIVE END CONDUIT

- Use with appropriate electrical conduit connector to feed power at track end
- Can be fed from the back or top

ITEM# FINISHES
1617 -01 ○ -02 ●



L CONNECTOR


- For joining two tracks at a 90 degree angle and feeding power
- Allows independent feed or same circuit
- Polarized and pre-wired

ITEM# FINISHES
1530 -01 ○ -02 ●



CONSTRUCT

24V DC Multi-Application Modular Channel Lighting System



**Now Available:
in White Finish**

Construct is a 24v DC modular track system that consists of an assortment of low profile, narrow extruded aluminum channels, joined and powered by various connectors and power feeds. With this system, you can build almost any straight or 90° shaped structure. The channel is electrified by power feeds which come with wire leads, connected to a remote power supply.

Construct is a modern take on the traditional track lighting system that has existed since the 1960's, except it is much more versatile. Instead of standard surface mounting, Construct also features channels for trimless recessed, trimmed recessed or pendant mount application. Construct channels, connectors and fixtures come standard in black & white finish and 3000K color temperature. Variations could be available by special request. Now it's time you use your imagination and create your very own unique design to illuminate your space!




LIGHT FIXTURES

PAGE 151




SUSPENDED

PAGE 153

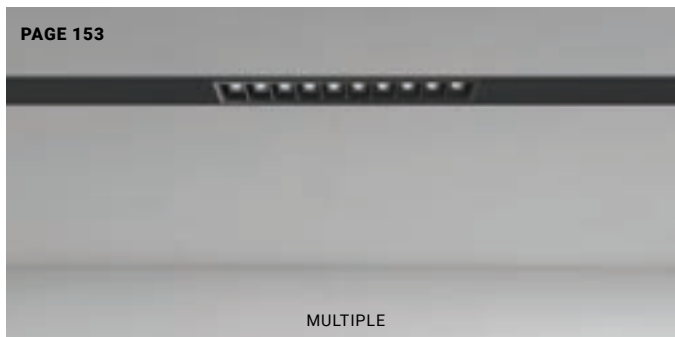


MULTIPLE

PAGE 155

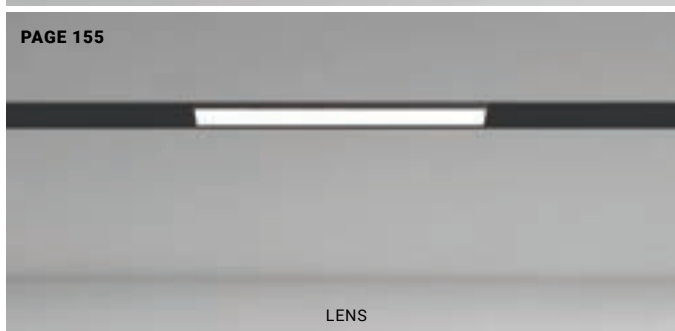


LENS

PAGE 157

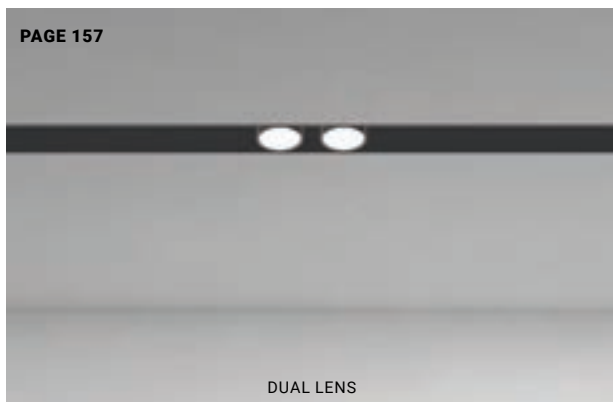

DUAL LENS

PAGE 159

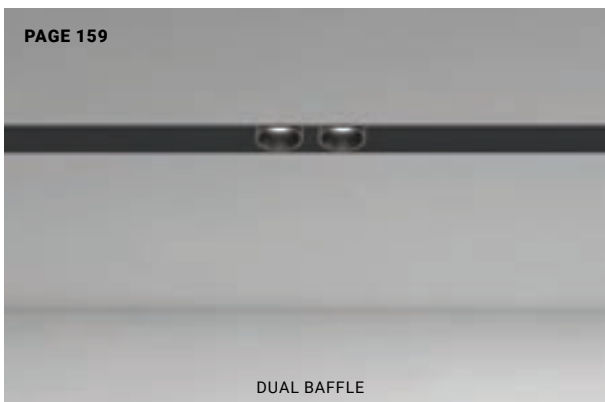

DUAL BAFFLE

PAGE 161



MULTIPLE SPOT

PAGE 163




WALL WASH

PAGE 165




SPOTS

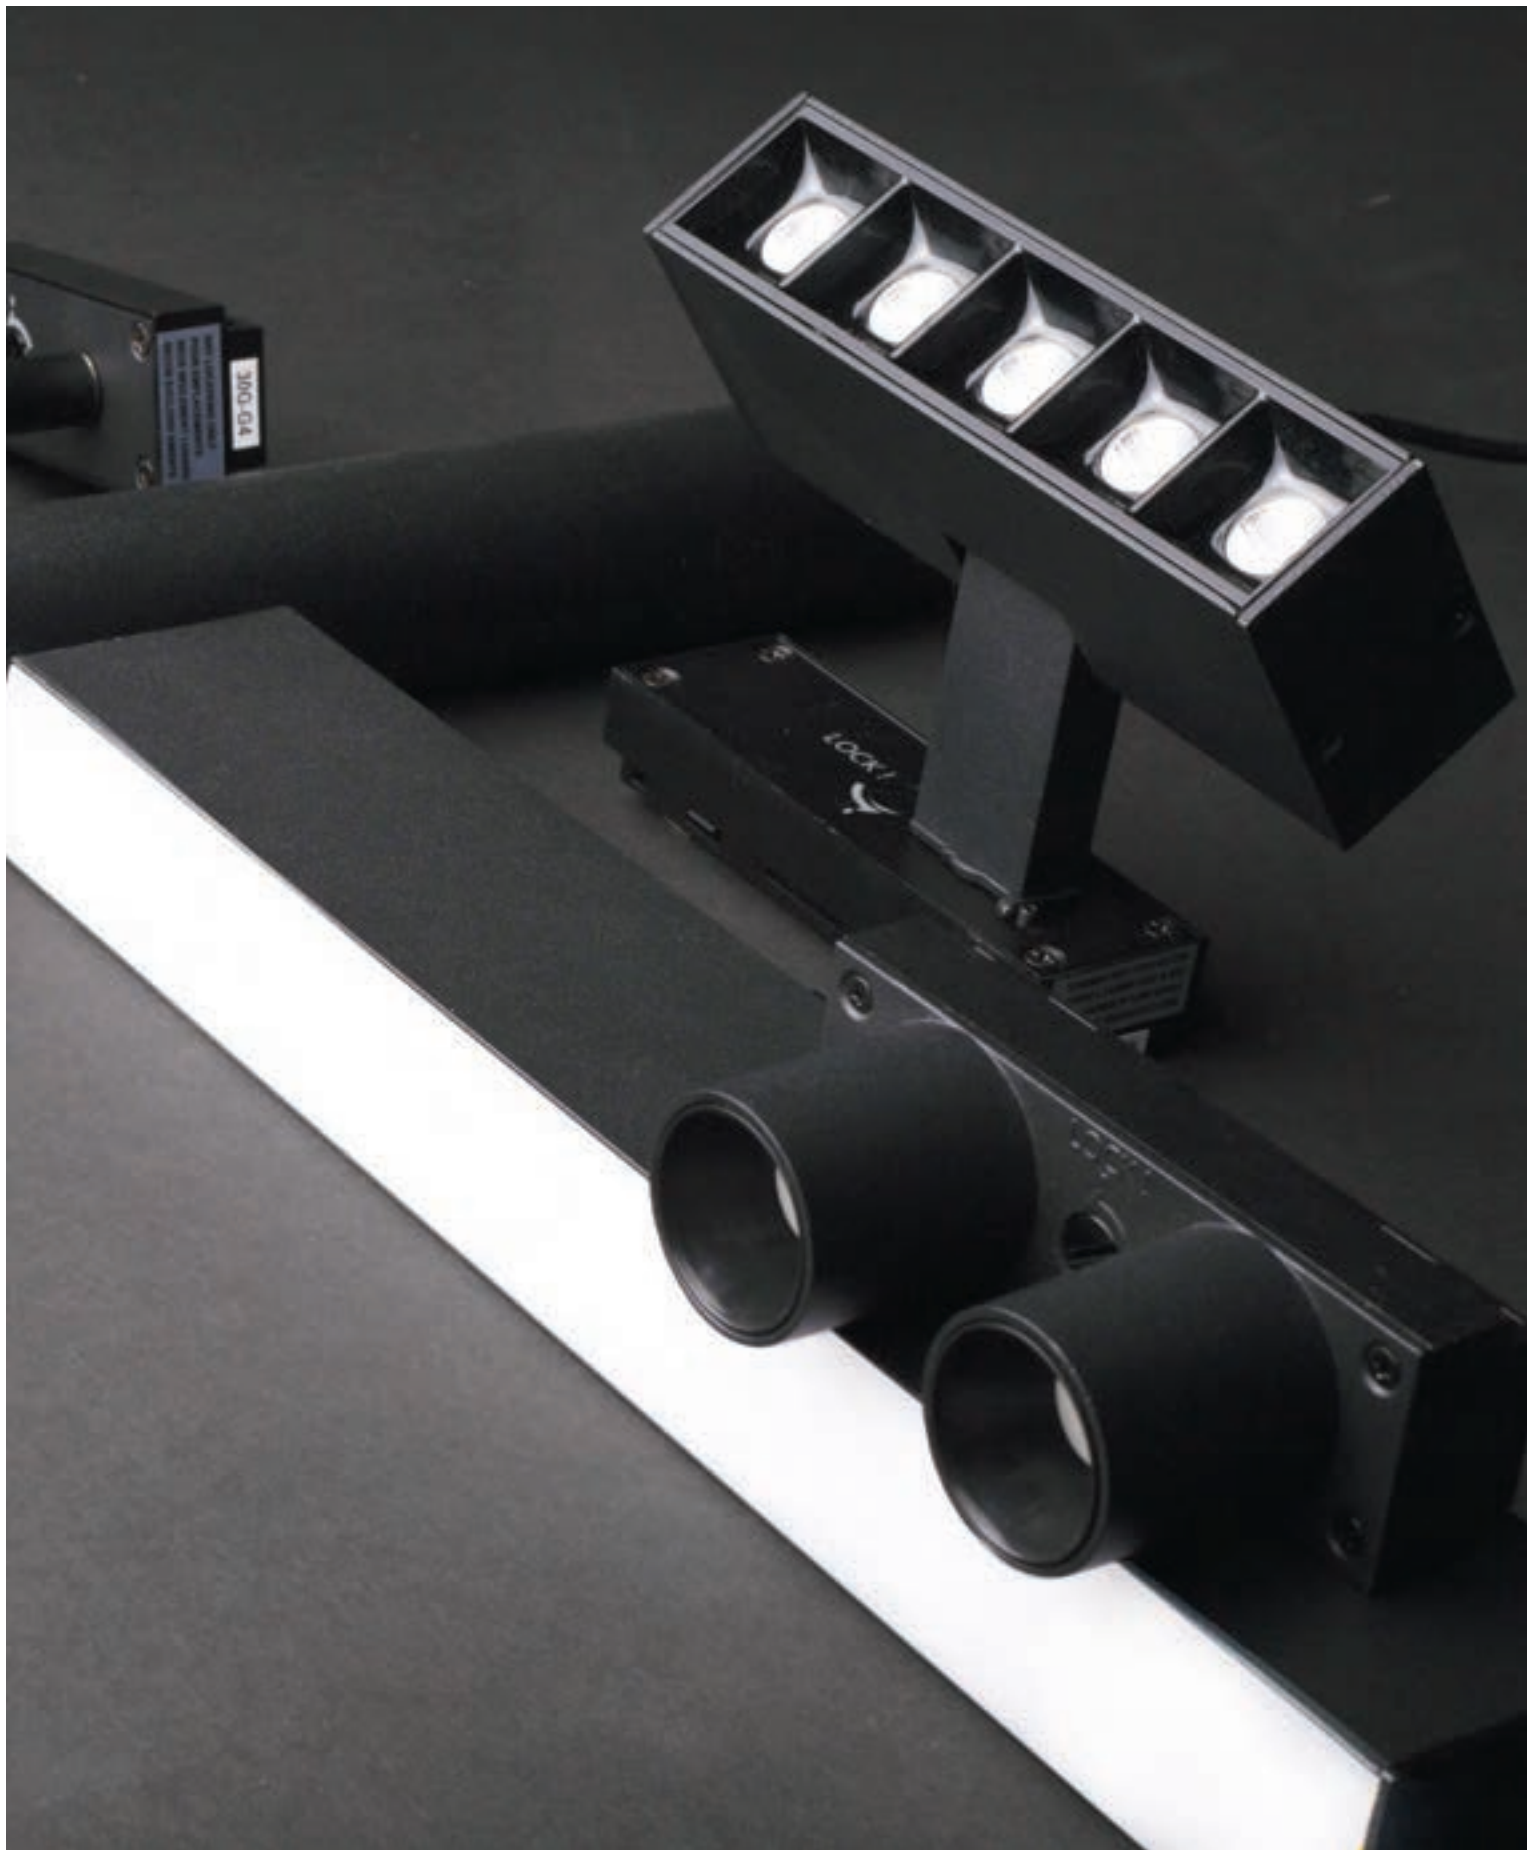

CONSTRUCT
MOUNTING OPTIONS

SURFACE MOUNT + PENDANT CHANNELS

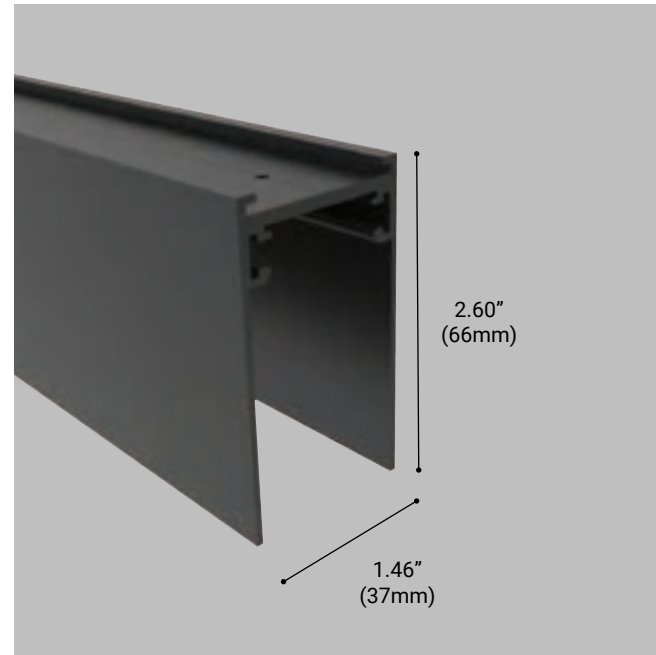

PROFILE OPTIONS:

ITEM#	FINISH	LENGTHS
35767-01*	Matte Black	3ft. (914mm)
35767-02*	Matte White	3ft. (914mm)
35768-01*	Matte Black	6ft. (1828mm)
35768-02*	Matte White	6ft. (1828mm)
35769-01*	Matte Black	8ft. (2438mm)
35769-02*	Matte White	8ft. (2438mm)


 ***Field Cuttable**



PENDANT KIT:


Pendant Kit with Canopy	35796-015	Black
	35796-02	White
Pendant Kit	35797-012	

CORNER PROFILE OPTIONS:

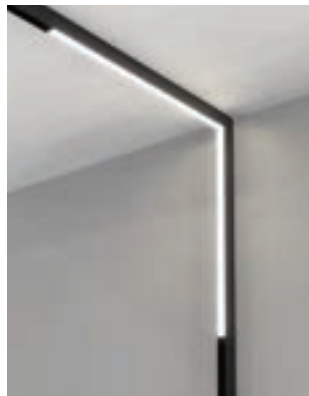


36702-01

Vertical Corner L-Shaped
Connector for Surface-to-Wall





35814-01

Horizontal Corner L-Shaped
Connector for Ceiling or Wall



CONSTRUCT
MOUNTING OPTIONS

TRIMLESS RECESSED CHANNEL
DRYWALL INSTALLATION

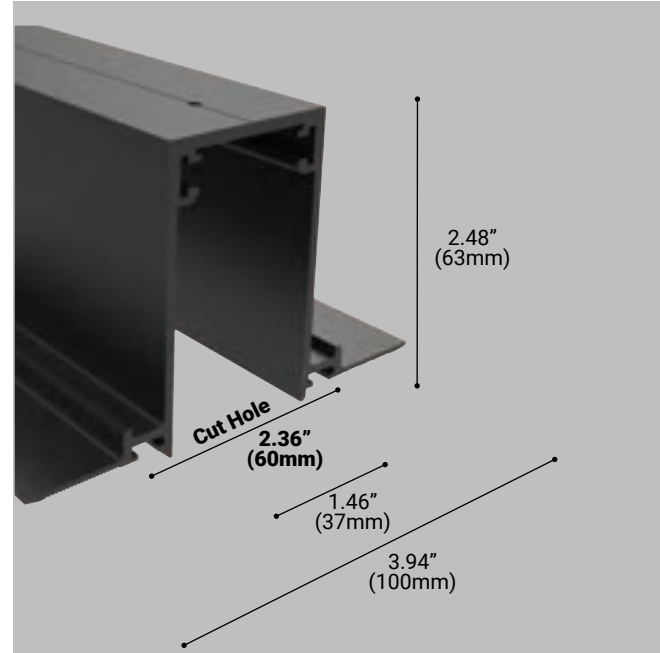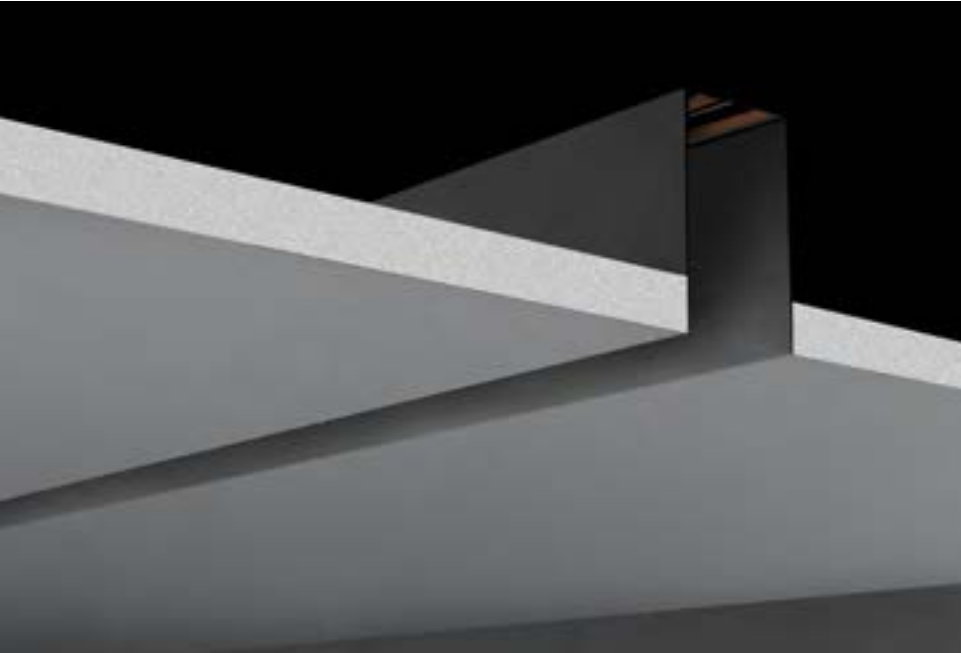


PROFILE OPTIONS:


ITEM#	FINISH	LENGTHS
35775-01*	Matte Black	3ft. (914mm)
35775-02*	Matte White	3ft. (914mm)
35776-01*	Matte Black	6ft. (1828mm)
35776-02*	Matte White	6ft. (1828mm)
35777-01*	Matte Black	8ft. (2438mm)
35777-02*	Matte White	8ft. (2438mm)

 *Field Cuttable


CORNER PROFILE OPTIONS:

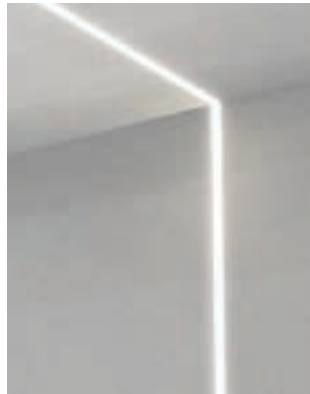

35779-01
Vertical Corner L-Shaped
Connector for trimless
wall to ceiling




35780-01
Horizontal Corner L-Shaped
Connector for trimless
wall or ceiling



CONSTRUCT
MOUNTING OPTIONS

TRIM RECESSED CHANNEL

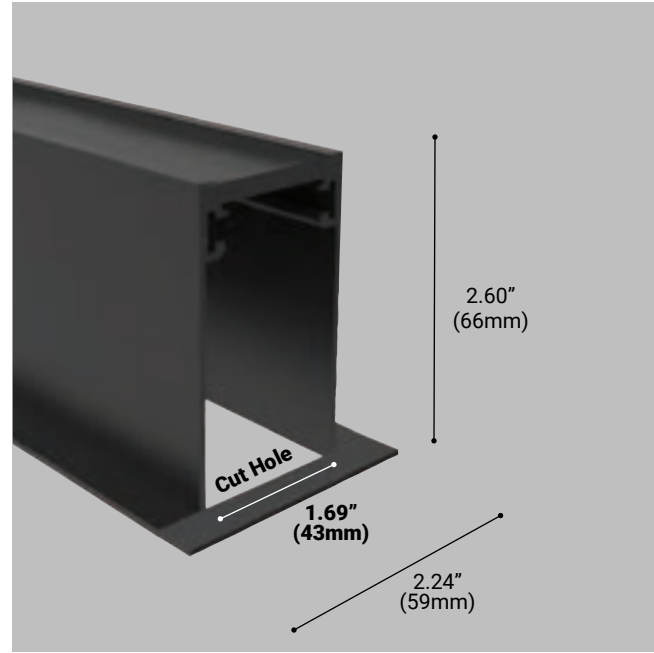


PROFILE OPTIONS:


ITEM#	FINISH	LENGTHS
35771-01*	Matte Black	3ft. (914mm)
35771-02*	Matte White	3ft. (914mm)
35772-01*	Matte Black	6ft. (1828mm)
35772-02*	Matte White	6ft. (1828mm)
35773-01*	Matte Black	8ft. (2438mm)
35773-02*	Matte White	8ft. (2438mm)

 ***Field Cuttable**


CORNER PROFILE OPTIONS:

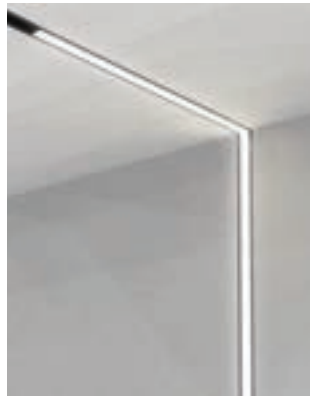

36734-01
Vertical Corner L-Shaped
Connector for trimmed
wall to ceiling




35781-01
Horizontal Corner L-Shaped
Connector for trimmed
wall or ceiling



SUSPENDED

Slim and sleek mini cylinder pendants are the perfect choice of light when decorative task lighting is desired. With many applicable uses such as a cluster pendant over a kitchen island or an office work surface, the Construct Suspended fixtures add dimension and style to your space.

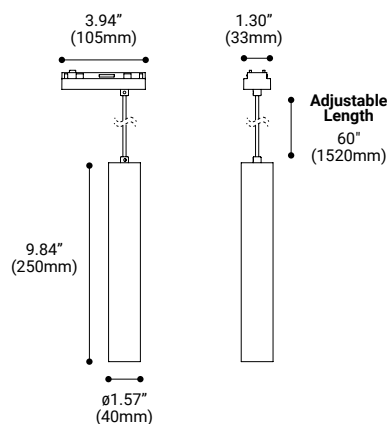

SPECIFICATIONS

Light Source:	1 x 6.4W Integrated LED
Beam Angle:	20°
Kelvin:	3000K
Initial Lumens:	604 Lm
Delivered Lumens:	372 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Dimension:	1.57"DIA x 3.94"W x 9.84"H
Adjustable Wire Length:	60"
Approval:	Dry
Electrical Approval:	   COMPLIANT
Warranty:	

COMPATIBLE CHANNELS	PAGE 148 - 150
COMPATIBLE ACCESSORIES	PAGE 167
COMPATIBLE POWER SUPPLIES	PAGE 167

ORDERING OPTIONS



35766-01
BLACK




35766-02
WHITE



MULTIPLE

Linear module cluster fixtures offer uniform light distribution, high output performance and stylish design. This fixture family is available in 3 sizes and sits flush to the channel lip and ceiling line.

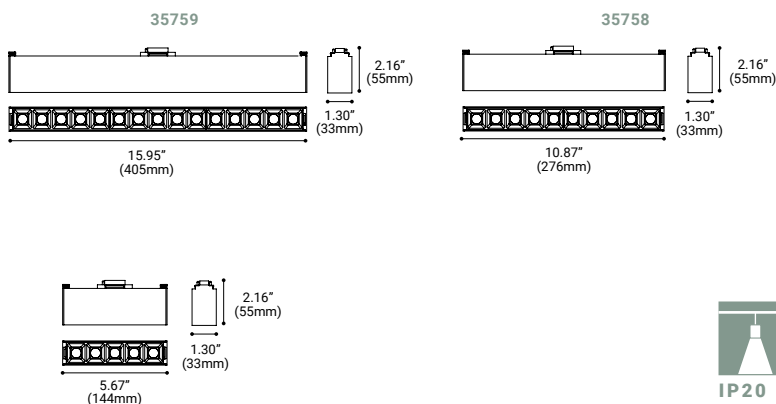

STANDARD SPECIFICATIONS

Light Source:	Integrated LED
Beam Angle:	25°
Kelvin:	3000K
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Approval:	Dry
Electrical Approval:	   COMPLIANT
Warranty:	

35759



LAMPING

LED Wattage: 33W
Initial Lumens: 2888 Lm
Delivered Lumens: 2057 Lm

DIMENSIONS

Fixture: 15.95\"L x 1.30\"W x 2.16\"H

35758



LAMPING

LED Wattage: 22W
Initial Lumens: 1925 Lm
Delivered Lumens: 1378 Lm

DIMENSIONS

Fixture: 10.87\"L x 1.30\"W x 2.16\"H

35757



LAMPING

LED Wattage: 11W
Initial Lumens: 962 Lm
Delivered Lumens: 686 Lm

DIMENSIONS

Fixture: 5.67\"L x 1.30\"W x 2.16\"H

COMPATIBLE CHANNELS	PAGE 148 - 150
COMPATIBLE ACCESSORIES	PAGE 167
COMPATIBLE POWER SUPPLIES	PAGE 167

ORDERING OPTIONS



35759-01
BLACK



35759-02
WHITE



35758-01
BLACK




35758-02
WHITE



35757-01
BLACK




35757-02
WHITE

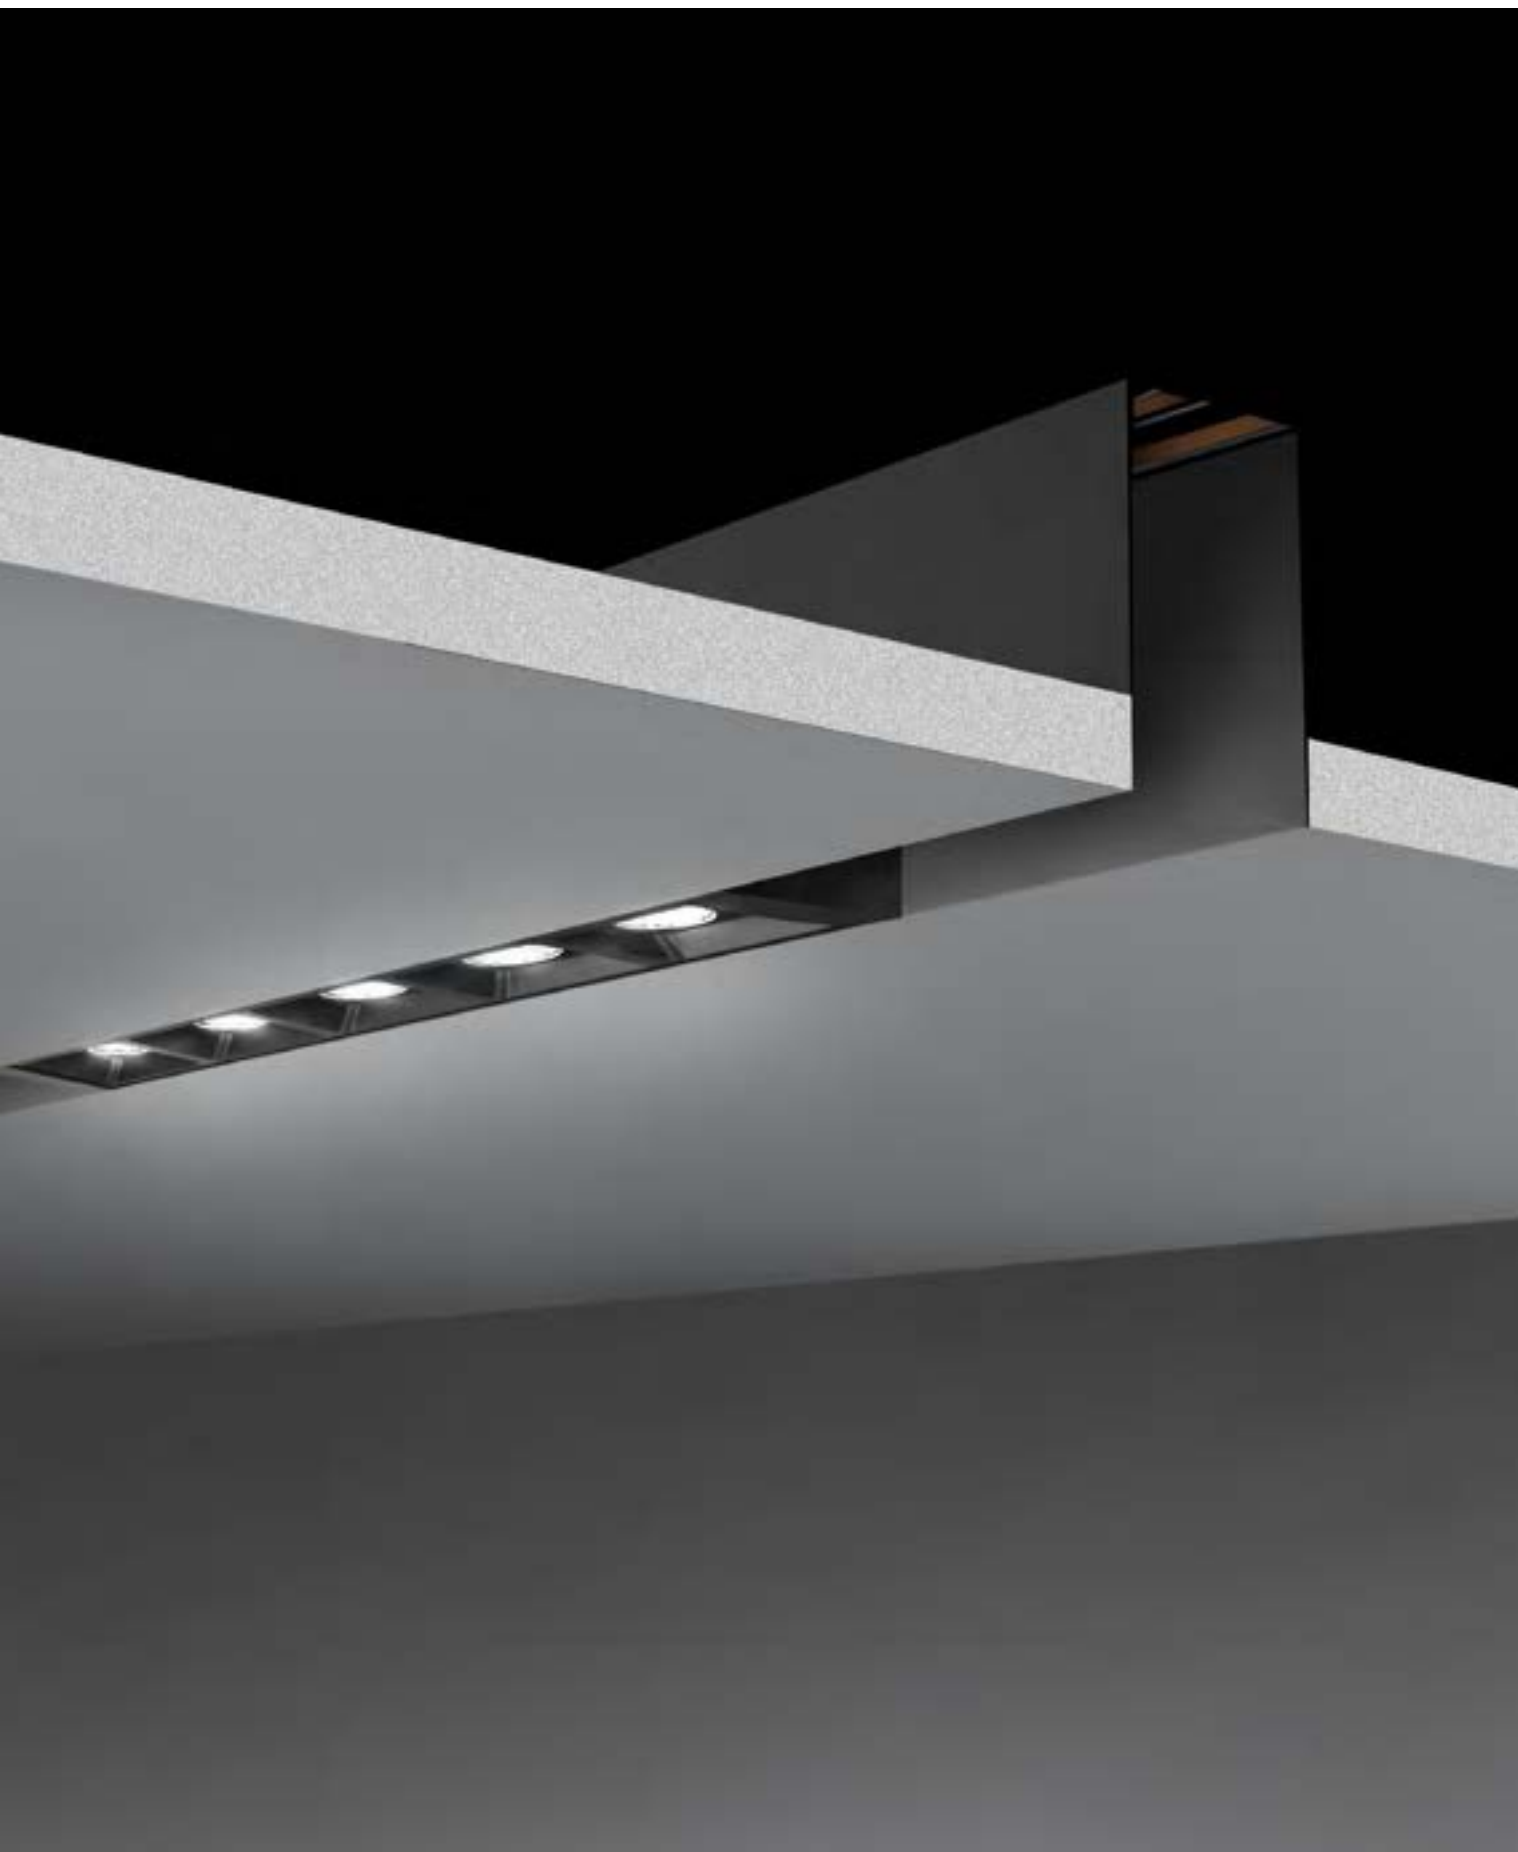

LENS

Lens fixtures are the perfect choice for consistent lighting that spans a large area. These fixtures sit flush to the channel lip and comes with an opal lens to diffuse the light. Available in 3 sizes. Lens fixtures can be joined together seamlessly using the overlap lens found in the accessories section.

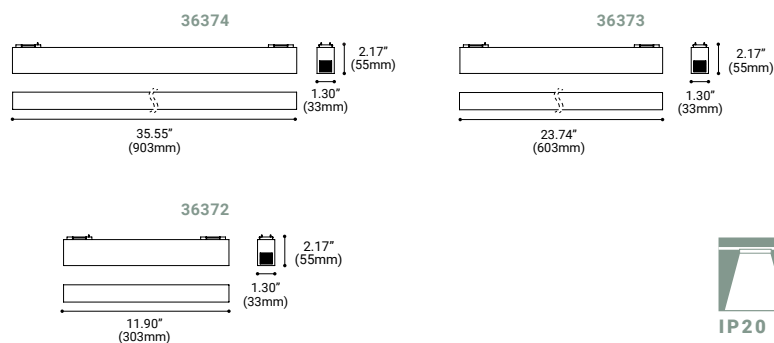

STANDARD SPECIFICATIONS

Light Source:	Integrated LED
Beam Angle:	115°
Kelvin:	3000K
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Approval:	Dry

Electrical Approval:



COMPLIANT

Warranty:



36374



LAMPING

LED Wattage: 27.5W
Initial Lumens: 2286 Lm
Delivered Lumens: 1428 Lm

DIMENSIONS

Fixture: 35.55"L x 1.30"W x 2.17"H

36373



LAMPING

LED Wattage: 19W
Initial Lumens: 1824 Lm
Delivered Lumens: 1197 Lm

DIMENSIONS

Fixture: 23.74"L x 1.30"W x 2.17"H

36372



LAMPING

LED Wattage: 10W
Initial Lumens: 772 Lm
Delivered Lumens: 472 Lm

DIMENSIONS

Fixture: 11.90"L x 1.30"W x 2.17"H

COMPATIBLE CHANNELS PAGE 148 - 150

COMPATIBLE ACCESSORIES PAGE 167

COMPATIBLE POWER SUPPLIES PAGE 167


ORDERING OPTIONS

36374-01
BLACK36374-02
WHITE36373-01
BLACK36373-02
WHITE36372-01
BLACK36372-02
WHITE



DUAL LENS

Dual Lens fixtures are one piece but come with two light modules. These fixtures fit flush to the channel and ceiling line. They are outfitted with an opal Lens to reduce glare and maximize light control.

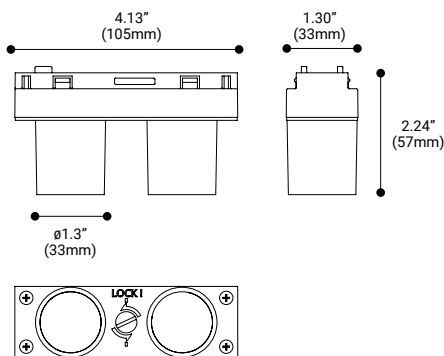

SPECIFICATIONS

Light Source:	4.5W Integrated LED
Beam Angle:	80°
Kelvin:	3000K
Initial Lumens:	362 Lm
Delivered Lumens:	180 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Dimension:	4.13\"L x 1.30\"W x 2.24\"H
Approval:	Dry
Electrical Approval:	   COMPLIANT
Warranty:	

COMPATIBLE CHANNELS PAGE 148 - 150

COMPATIBLE ACCESSORIES PAGE 167

COMPATIBLE POWER SUPPLIES PAGE 167

ORDERING OPTIONS



35765-01
BLACK




35765-02
WHITE



DUAL BAFFLE

Dual Baffle fixtures are also one piece but come with two light fixtures. These fixtures fit flush to the channel and ceiling line. They feature a clear lens for maximum light output and an inner ridge baffle for glare reduction and aesthetic appeal.

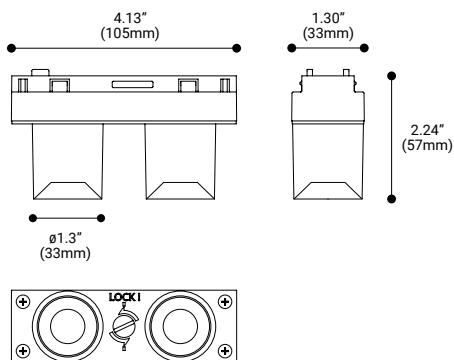

SPECIFICATIONS

Light Source:	4.5W Integrated LED
Beam Angle:	35°
Kelvin:	3000K
Initial Lumens:	398 Lm
Delivered Lumens:	301 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Dimension:	4.13"L x 1.30"W x 2.24"H
Approval:	Dry
Electrical Approval:	   COMPLIANT
Warranty:	

COMPATIBLE CHANNELS PAGE 148 - 150

COMPATIBLE ACCESSORIES PAGE 167

COMPATIBLE POWER SUPPLIES PAGE 167

ORDERING OPTIONS



36377-01
BLACK




36377-02
WHITE




ADJUSTABLE MULTIPLE SPOT

Adjustable Multiple Spots are cluster fixtures that are built on an adjustable frame. They are used in applications where uniform controlled light needs to be directed to a particular area, either as task or accent lighting.

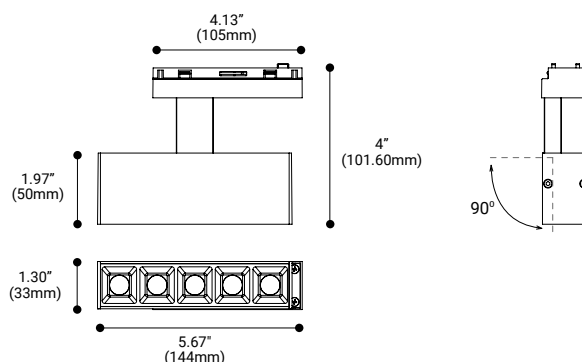

Adjustable Tilt



SPECIFICATIONS

Light Source:	11W Integrated LED
Beam Angle:	30°
Kelvin:	3000K
Initial Lumens:	962 Lm
Delivered Lumens:	686 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Dimension:	5.67"L x 1.30"W x 4"H
Approval:	Dry
Electrical Approval:	   COMPLIANT
Warranty:	

COMPATIBLE CHANNELS	PAGE 148 - 150
COMPATIBLE ACCESSORIES	PAGE 167
COMPATIBLE POWER SUPPLIES	PAGE 167

ORDERING OPTIONS



36379-01
BLACK




36379-02
WHITE



WALL WASH


Wall Wash fixtures are used for accent lighting when certain wall decor requires light optimization. They sit flush to the channel and ceiling line and quietly blend into the existing ceiling structure.

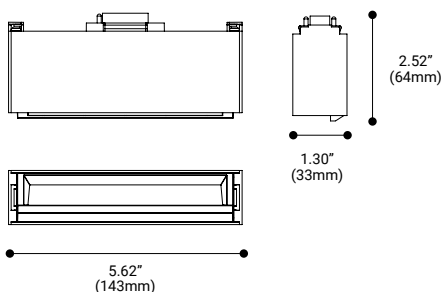

SPECIFICATIONS

Light Source:	11W Integrated LED
Beam Angle:	70° (Wall Wash)
Kelvin:	3000K
Initial Lumens:	975 Lm
Delivered Lumens:	462 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Dimension:	5.62"L x 1.30"W x 2.52"H
Approval:	Dry
Electrical Approval:	   COMPLIANT
Warranty:	

LIGHT DISTRIBUTION

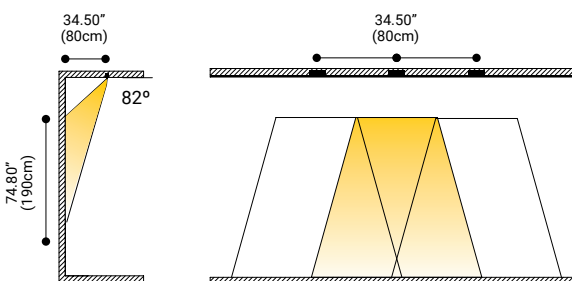

COMPATIBLE CHANNELS	PAGE 148 - 150
COMPATIBLE ACCESSORIES	PAGE 167
COMPATIBLE POWER SUPPLIES	PAGE 167

ORDERING OPTIONS



36376-01
BLACK




36376-02
WHITE



SPOTS

Spot fixtures are a popular choice for controlled, focused accent lighting. Low and high wattage fixtures are available with 355° rotation and a 90° vertical adjustment. Spot fixtures are solid in construction and have versatile attributes. Construct Spots are a common choice for a range of projects.

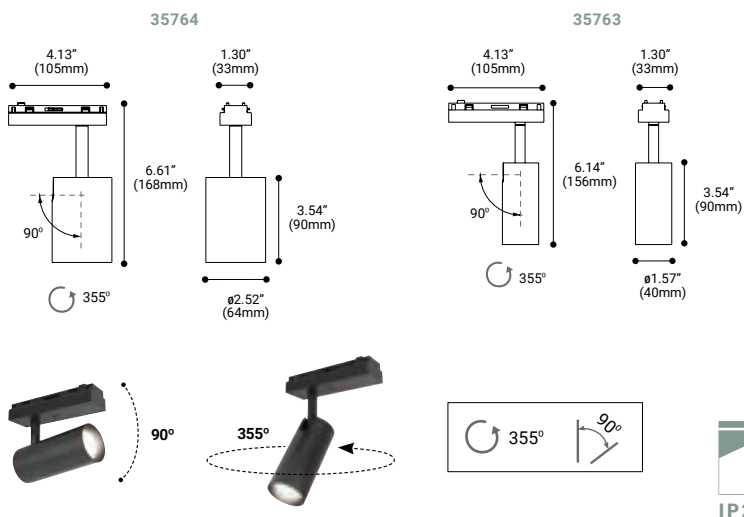

STANDARD SPECIFICATIONS

Light Source:	Integrated LED
Beam Angle:	20°
Kelvin:	3000K
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Approval:	Dry
Electrical Approval:	COMPLIANT
Warranty:	



35764

LAMPING

LED Wattage: 13.5W
Initial Lumens: 1207 Lm
Delivered Lumens: 659 Lm

DIMENSIONS

Fixture: 2.52"DIA x 1.30"W x 6.14"H



35763

LAMPING

LED Wattage: 6.4W
Initial Lumens: 604 Lm
Delivered Lumens: 335 Lm

DIMENSIONS

Fixture: 1.57"DIA x 1.30"W x 6.14"H

COMPATIBLE CHANNELS	PAGE 148 - 150
COMPATIBLE ACCESSORIES	PAGE 167
COMPATIBLE POWER SUPPLIES	PAGE 167

ORDERING OPTIONS



35764-01
BLACK



35764-02
WHITE



35763-01
BLACK



35763-02
WHITE



CONSTRUCT

ACCESSORIES

PART NAME & NUMBER	DESCRIPTION		PENDANT	SURFACE MOUNT	TRIM RECESSED	TRIMLESS RECESSED
CIRCUIT JOINT BLACK: 36361-01 WHITE: 36361-02	Structurally connect and pass power through Pendant channels		•			
CIRCUIT JOINT BLACK: 36362-01 WHITE: 36362-02	Structurally connect and pass power through Surface Mount, Trim Recessed & Trimless Recessed channels			•	•	•
POWER JOINT BLACK: 36363-01 WHITE: 36363-02 Wire Length: 78.74" (200cm)	Structurally connect and provide power to Pendant channels		•			
POWER JOINT BLACK: 36364-01 WHITE: 36364-02 Wire Length: 78.74" (200cm)	Structurally connect and provide power to Surface Mount, Trim Recessed, & Trimless Recessed channels			•	•	•
END CAP WITH POWER CORD BLACK: 36368-01 WHITE: 36368-02 Wire Length: 78.74" (200cm)	Provides power to the end of Pendant, Surface Mount & Trimless Recessed channels		•	•		•
END CAP WITH POWER CORD BLACK: 36369-01 WHITE: 36369-02 Wire Length: 78.74" (200cm)	Provides power to the end of Trim Recessed channels				•	
END CAP WITHOUT POWER CORD BLACK: 36370-01 WHITE: 36370-02	Dead end cap for Pendant, Trim Recessed & Trimless Recessed		•	•		•
END CAP WITHOUT POWER CORD BLACK: 36371-01 WHITE: 36371-02	Dead end cap for Trim Recessed				•	
SURFACE MOUNTED CLIP 35795-015	For use with Surface Mount channels (2 per bag)			•		
PENDANT KIT WITH CANOPY BLACK: 35796-015 WHITE: 35796-02	For use with Pendant channels (includes canopy for power wire)		•			
PENDANT KIT 35797-012	For use with Pendant channels		•			
PC COVER - FROSTED LENS 35799-02 Length: 13ft. (4000mm) 35800-02 Length: 49ft. (15,000mm)	For use with Lens fixtures: - 36372 - 36373 - 36374		•	•	•	•
DRIVER (TRIAC) 30264-014	96W TRIAC Dimming Driver		•	•	•	•
DRIVER (0-10V) 44912-017	96W 0-10V Dimming Driver		•	•	•	•



Need Help?

Follow 4 simple steps:

- 1 Choose application:
Surface, Pendant, Trimless Recessed, Trim Recessed
- 2 Identify the length and shape of each run
- 3 Identify which fixtures and how many in each run
- 4 Choose Driver: TRIAC or 0-10V

Email sales@eurofase.com for further inquiries


EXAMPLE RUN 1

Straight 16' Trimless Recessed run in black with
5 x 35764-01 TRIAC dimming



EXAMPLE RUN 1

12' sq Surface Mount run with 4 x 36374-01,
2 x 36372-01, 0-10V dimming

CONSTRUCT INSTALLATION

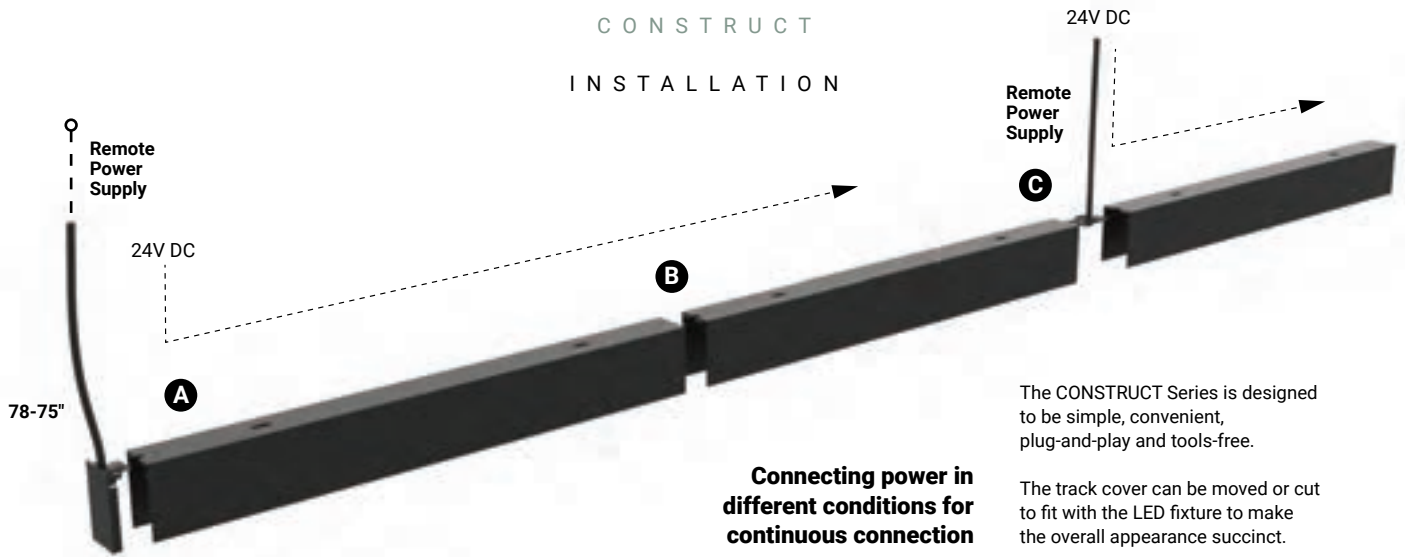


A Single Power on a Single Track

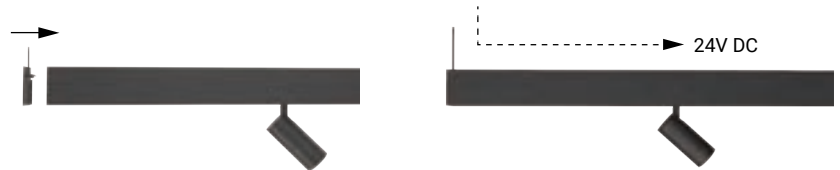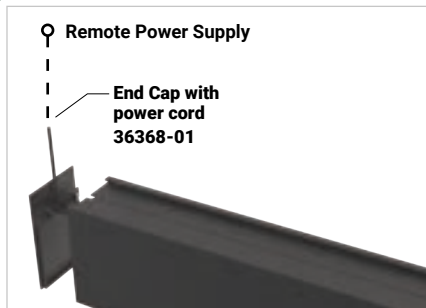



Using power end cap (36368-01) as power feed

B Single Power on Multiple Tracks

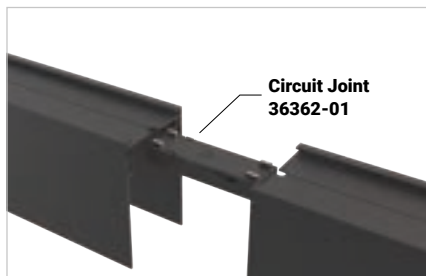

Structural and electrical connection between channels


C Multiple Powers on Multiple Tracks

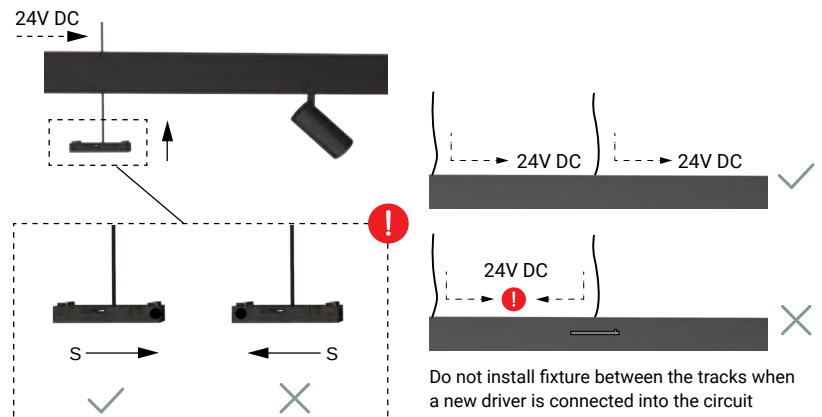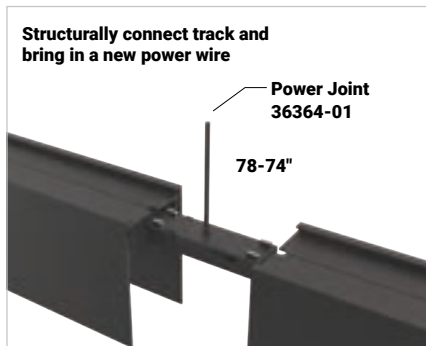

Using power joint (36364-01) to connect more drivers


CONSTRUCT

LIGHT FIXTURE INSTALL

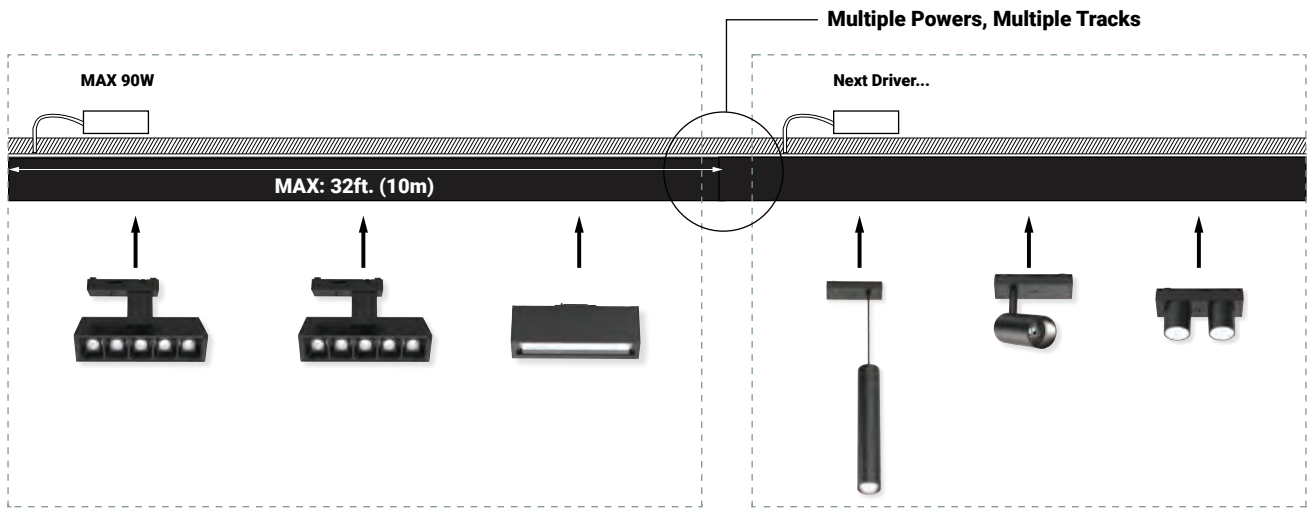

DRIVERS

[Remote Location]

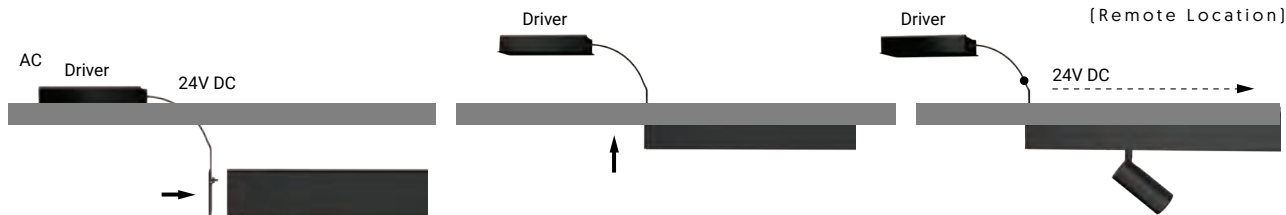

30264-014



44912-017




POWER UP


ITEM #	POWER	DIMMING	LENGTH	WIDTH	HEIGHT
30264-014	24V (DC - 96W)	TRIAC	6.96" (177mm)	2.75" (70mm)	1.38" (35mm)
44912-017	24V (DC - 96W)	0-10V	11.4" (290.5mm)	2.36" (59.9mm)	1.4" (35mm)

CONSTRUCT



OVERSIZED LENS INSTALLATION



PC cover can be cut into required length



Remove the end cap from CONSTRUCT - Lens module, the modules can be installed next to each other, then use longer PC cover to make seamless appearance.

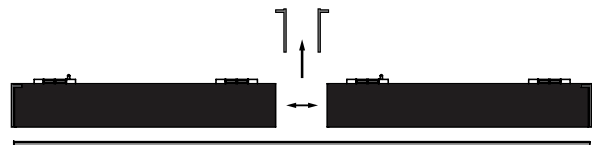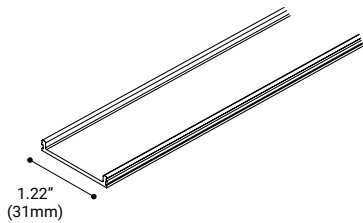

PC COVER - FROSTED LENS


ITEM#	FINISH	LENGTHS
35799-02	Frosted White	13ft. (4000mm)
35800-02		49ft. (15000mm)
PC COVER ONLY USE WITH 36372, 36373 & 36374 FAMILY		



SUSPENDED

BLACK: 35766-01
WHITE: 35766-02


H(m)	D(m)	E(lx)
20°		
1.0	0.37	1755
2.0	0.75	438
3.0	1.12	194
4.0	1.49	109
5.0	1.86	70



MULTIPLE

BLACK: 35759-01
WHITE: 35759-02


H(m)	D(m)	E(lx)
20°		
1.0	0.37	1755
2.0	0.75	438
3.0	1.12	194
4.0	1.49	109
5.0	1.86	70



LENS


BLACK: 36374-01
WHITE: 36374-02

H(m)	D(m)	E(lx)
115°		
1.0	3.05	342
2.0	6.10	85
3.0	9.16	38
4.0	12.21	21
5.0	15.27	13




BLACK: 35758-01
WHITE: 35758-02

H(m)	D(m)	E(lx)
25°		
1.0	0.61	5243
2.0	1.23	1311
3.0	1.84	582
4.0	2.46	327
5.0	3.08	209




BLACK: 36373-01
WHITE: 36373-02

H(m)	D(m)	E(lx)
115°		
1.0	3.16	209
2.0	6.32	52
3.0	9.48	23
4.0	12.64	13
5.0	15.80	8




BLACK: 35757-01
WHITE: 35757-02

H(m)	D(m)	E(lx)
25°		
1.0	0.62	1854
2.0	1.24	463
3.0	1.86	206
4.0	2.48	115
5.0	3.10	74



BLACK: 36372-01
WHITE: 36372-02


H(m)	D(m)	E(lx)
115°		
1.0	3.05	106
2.0	6.10	26
3.0	9.15	11
4.0	12.20	6
5.0	15.26	4



DUAL BAFFLE

BLACK: 36377-01
WHITE: 36377-02

H(m)	D(m)	E(lx)
35°		
1.0	0.62	753
2.0	1.25	188
3.0	1.88	83
4.0	2.51	47
5.0	3.14	30




DUAL LENS

BLACK: 35765-01
WHITE: 35765-02



H(m)	D(m)	E(lx)
80°		
1.0	1.19	57
2.0	2.39	14
3.0	3.59	6
4.0	4.79	3
5.0	5.99	2




MULTIPLE SPOT

BLACK: 36379-01
WHITE: 36379-02



H(m)	D(m)	E(lx)
30°		
1.0	0.62	1854
2.0	1.24	463
3.0	1.86	206
4.0	2.48	115
5.0	3.10	74




SPOT

BLACK: 35764-01
WHITE: 35764-02



H(m)	D(m)	E(lx)
20°		
1.0	0.34	1834
2.0	0.68	458
3.0	1.02	203
4.0	1.37	114
5.0	1.71	73




WALL WASH

BLACK: 36376-01
WHITE: 36376-02




H(m)	D(m)	E(lx)
70°		
1.0	1.45	256
2.0	2.90	64
3.0	4.35	28
4.0	5.80	16
5.0	7.25	10



BLACK: 35763-01
WHITE: 35763-02



H(m)	D(m)	E(lx)
20°		
1.0	0.34	1834
2.0	0.68	458
3.0	1.02	203
4.0	1.37	114
5.0	1.71	73



MAST


Slim Rounded Profile 24V DC
Modular Channel Lighting System

Mast is a 24v DC modular lighting system with aluminum rounded channels. Using various connectors, these minimalistic tubes can be joined to form structures of various shapes. Once your structure is formed you can insert a variety of lighting fixtures to create a desired lighting effect. Power is brought to the aluminum tubes using a power feed that is connected to a remote power supply.

When it comes to the actual aluminum tubes or channels, there are two applications to pick from; fixed tracks or adjustable tracks, which are either surface mounted or suspended from the ceiling or wall using extension tubes.




LIGHT FIXTURES

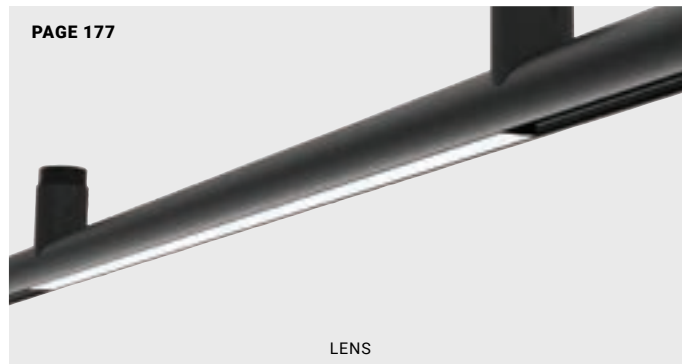

MAST

LENS

Lens fixtures are the perfect choice for consistent lighting that spans a large area. These channel light inserts fit flush to the channel lip and come with an opal lens for light diffusion. Available in 3 sizes, Mast Lens fixtures are a popular choice for general lighting in fixed channels or accent lighting in adjustable channels.

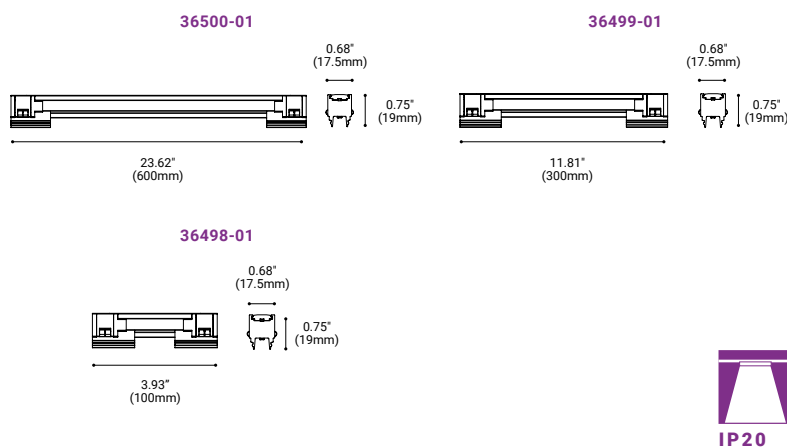

STANDARD SPECIFICATIONS

Light Source:	Integrated LED
Beam Angle:	110°
Kelvin:	3000K
CRI:	90+
Dimming:	TRIAC
Color:	Black
Input:	24V DC (Remote Driver required)
Approval:	Dry
Electrical Approval:	COMPLIANT
Warranty:	

36500-01 24" LED LENS



LAMPING

LED Wattage: 27.5W
Initial Lumens: 879 Lm
Delivered Lumens: 586 Lm

DIMENSIONS

Fixture: 23.62"L x 0.68"W x 0.75"H

36499-01 12" LED LENS



LAMPING

LED Wattage: 6W
Initial Lumens: 528 Lm
Delivered Lumens: 344 Lm

DIMENSIONS

Fixture: 11.81"L x 0.68"W x 0.75"H

36498-01 4" LED LENS



LAMPING

LED Wattage: 2W
Initial Lumens: 177 Lm
Delivered Lumens: 115 Lm

DIMENSIONS

Fixture: 3.93"L x 0.68"W x 0.75"H

ORDERING OPTIONS

ITEM#	FINISH	ITEM#	FINISH	ITEM#	FINISH
36500-01	Black	36499-01	Black	36498-01	Black






MAST


SPOT

Spot fixtures feature a solid cylindrical shape body on a versatile adjustable frame. There are two options to choose from, including a Mini Spot with a built on beam adjustment switch. Spot fixtures are commonly used for focused beam and accent lighting.

36512-01

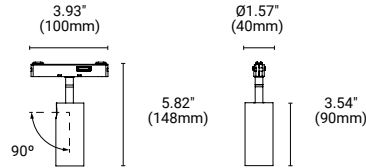

36513-01

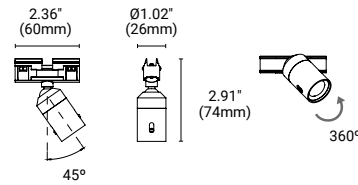

STANDARD SPECIFICATIONS

Light Source:	Integrated LED
Kelvin:	3000K
CRI:	90+
Dimming:	TRIAC
Color:	Black
Input:	24V DC (Remote Driver required)
Approval:	Dry
Electrical Approval:	COMPLIANT
Warranty:	

36512-01 SPOT FIXTURE




LAMPING

LED Wattage: 6.4W
Initial Lumens: 604 Lm
Delivered Lumens: 332 Lm
Beam Angle: 20°

DIMENSIONS

Head: 1.57"DIA x 3.54"H
Fixture: 3.93"W x 5.82"H



36513-01 MINI SPOT FIXTURE FIELD ADJUSTABLE BEAM ANGLE

LAMPING


LED Wattage: 2.7W
Initial Lumens: 230 Lm
Delivered Lumens: 83 Lm
Beam Angle: 8° - 20°

DIMENSIONS

Head: 1.02"DIA x 2.91"H
Fixture: 2.36"W x 2.91"H

ITEM#	FINISH	ITEM#	FINISH
36374-01	Black	36373-01	Black




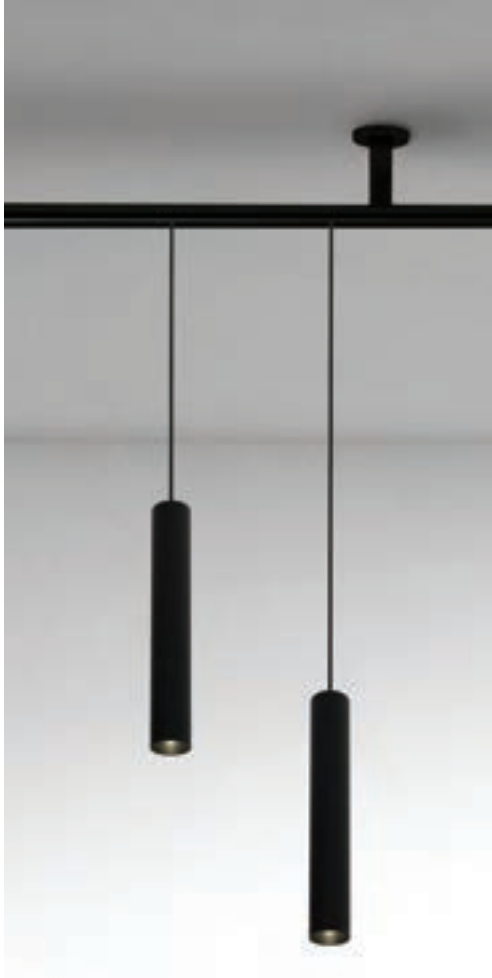

MAST

SUSPENSION

Cylinder pendants are most often used in task lighting applications. With their narrow extruded aluminum body, these cylinder pendants are solid yet minimalistic in appearance. Complete with 60" field adjustable wire kit for on site adjustments.

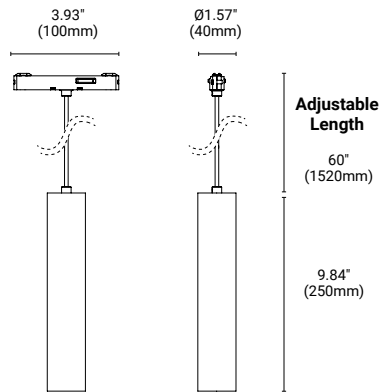

STANDARD SPECIFICATIONS

Light Source:	6.4W Integrated LED
Beam Angle:	20°
Kelvin:	3000K
Initial Lumens:	604 Lm
Delivered Lumens:	327 Lm
CRI:	90+
Dimming:	TRIAC
Color:	Black
Input:	24V DC (Remote Driver required)
Approval:	Dry
Electrical Approval:	   COMPLIANT
Warranty:	

ORDERING OPTIONS

ITEM#	FINISH
36520-01	Black







MAST

MULTIPLES

The multiple fixture features a cluster of light modules that are built onto a fully adjustable and functional frame. Mast Multiples have the ability to both tilt and rotate 180° allowing for accurate light positioning in tough to reach places.

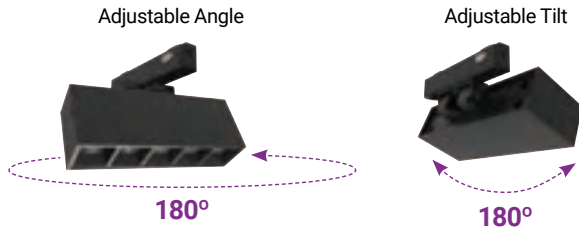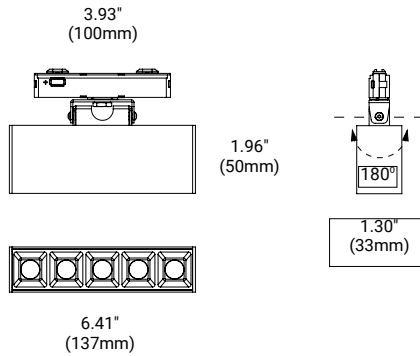

STANDARD SPECIFICATIONS

Light Source:	6.4W Integrated LED
Beam Angle:	20°
Kelvin:	3000K
Initial Lumens:	962 Lm
Delivered Lumens:	686 Lm
CRI:	90+
Dimming:	TRIAC
Color:	Black
Input:	24V DC (Remote Driver required)
Approval:	Dry
Electrical Approval:	   COMPLIANT
Warranty:	

ORDERING OPTIONS

ITEM#	FINISH
36517-01	Black



MAST COMPONENTS

CHANNELS			
LEGEND	ITEM #	DESCRIPTION	IMAGE
A	36500-01 Length: 72" (1828mm) 36282-01 Length: 36" (914mm)	FIXED TRACK	
B	36283-01 Length: 36" (914mm) 36284-01 Length: 12" (304mm)	SPOT MODULE	
ACCESSORIES			
C	36285-01 Length: 36" (914mm) 36286-01 Length: 24" (609mm) 36287-01 Length: 12" (304mm)	EXTENSION TUBE	
D	36288-01	CONNECTING TUBE	
E	36289-01	FIXED BASE WITH POWER FEED	
F	26290-01	FIXED BASE	
G	36291-01	END CAP	
H	36292-01 Length: 72" (1828mm)	BLANK COVER	
I	36293-01	MESH CONNECTOR	
J	36501-01	SURFACE MOUNT BASE	


MAST ACCESSORIES

POWER			
LEGEND	ITEM #	DESCRIPTION	IMAGE
K	36294-01 Length: 76.32" (1938mm)	ADAPTOR WITH POWER CORD	
L	30264-014 24V DC - 96W	24V DC DRIVER	
CONNECTORS			
M1	36296-01	I-CONNECTOR WITH CIRCUIT	
M2	36297-01	I-CONNECTOR WITHOUT CIRCUIT	
N1	36298-01 Wire Length: 76.32" (1938mm)	L-CONNECTOR WITH POWER CORD	
N2	36299-01	L-CONNECTOR WITHOUT POWER CORD	
O1	36300-01 Wire Length: 76.32" (1938mm)	T-CONNECTOR WITH POWER CORD	
O2	36301-01	T-CONNECTOR WITHOUT CIRCUIT	
O3	36302-01	T-CONNECTOR WITH CIRCUIT	
P1	36735-01	PENDANT KIT + POWER CORD	
P2	36736-01	PENDANT KIT	

MAST


LOOP CONNECTING SYSTEM

TT CONNECTION FIXED TRACK

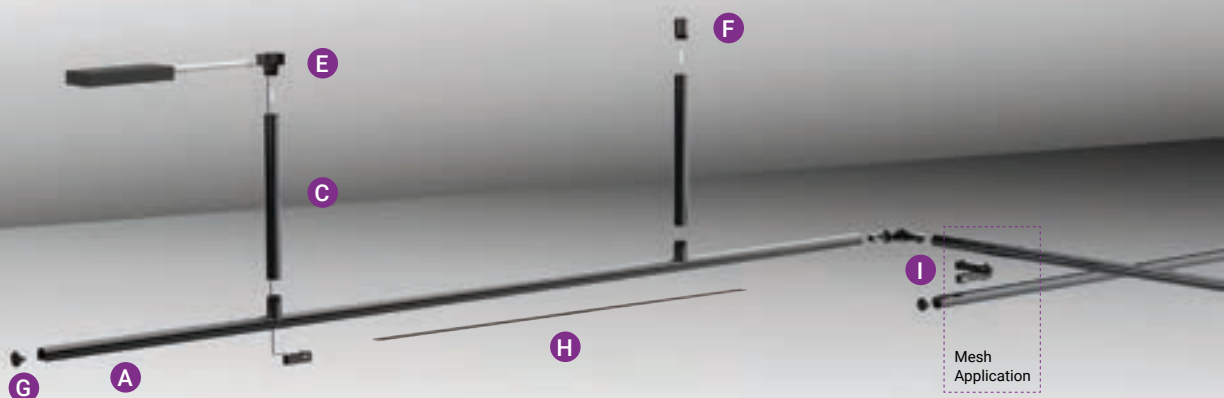

REFER TO MAST COMPONENTS & ACCESSORIES LEGEND ON PAGE 185 - 186



ITI CONNECTION ADJUSTABLE TRACK

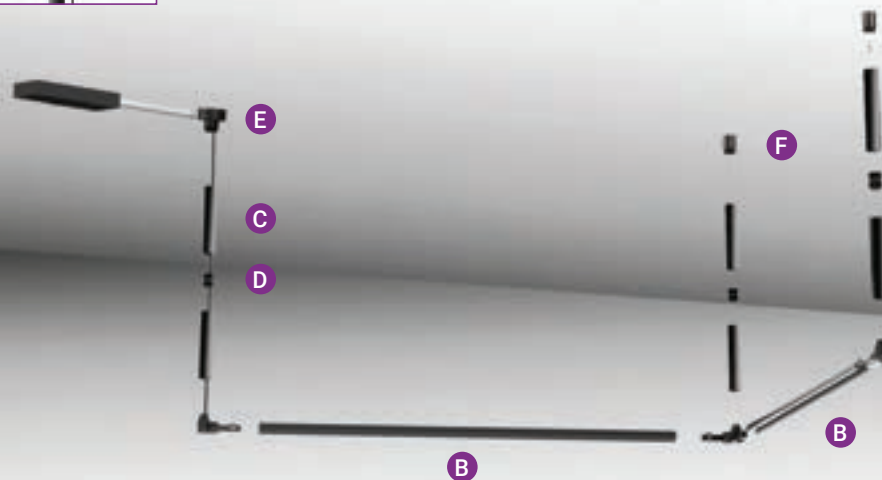

MAST

LOOP CONNECTING SYSTEM

1. Max wattage per 24V DC loop is 96W.
2. Max length of track per loop is 32ft. (10m) recommended, 6ft. (1.8m) for max cable length between driver and power.
3. Dimming modules are compatible to PWM dimming driver only.
4. **IMPORTANT:** To use drivers that are not on the recommended list, a compatibility test is required before installation.

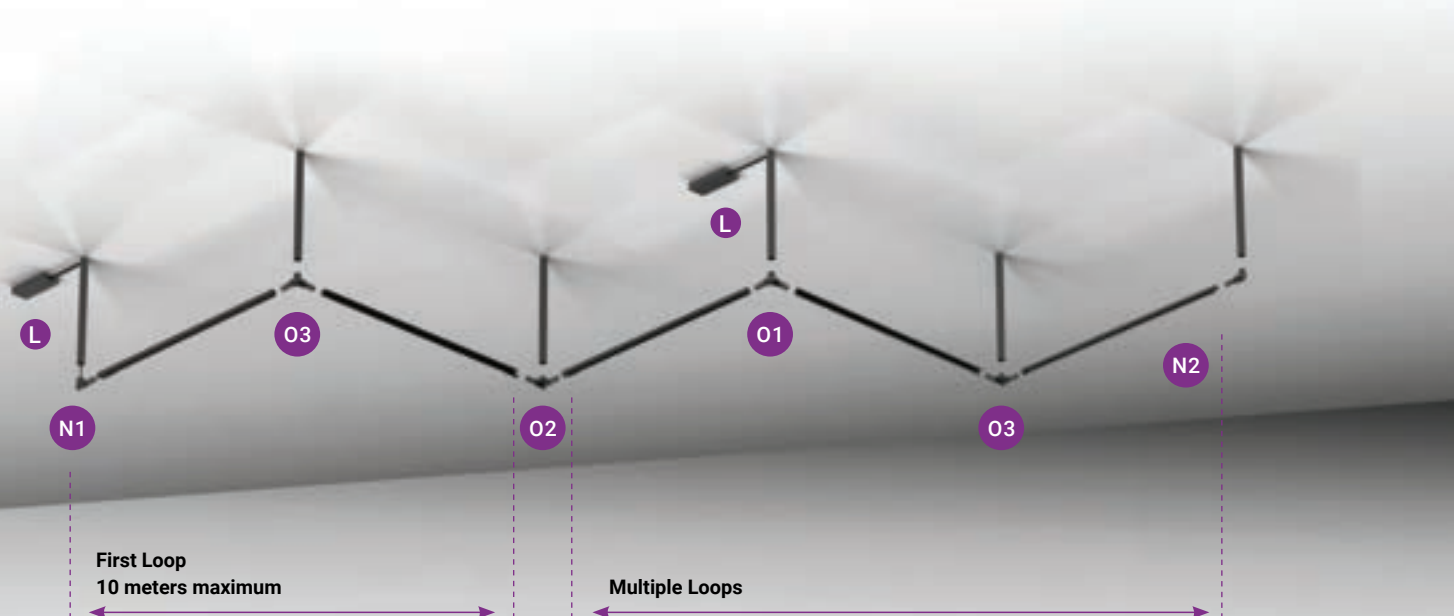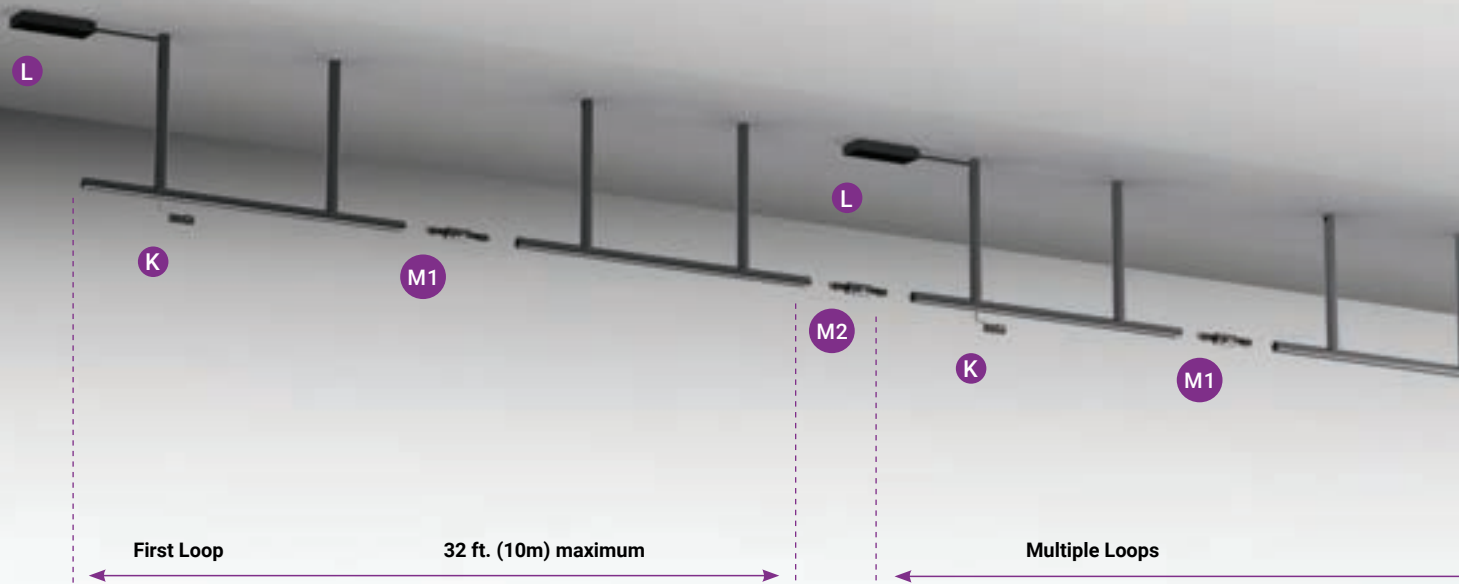

TT Connection:

Fixed Track Application

I-Connector with Circuit use 36296-01



90° Horizontal connection



Straight connection



90° Vertical connection

ITEM #	ITEM NAME	IMAGE	QUANTITY
36500-01	24" LED LENS MODULE		2
36281-01	72" FIXED TRACK		2
36285-01	36" EXTENSION TUBE		4
36290-01	FIXED BASE		3
36289-01	FIXED BASE WITH POWER FEED		1
36291-01	END CAP		2
36294-01	ADAPTOR WITH POWER CORD		1
36296-01	I-CONNECTOR WITH CIRCUIT		1

EXAMPLE

Chart is based on image above featuring the 24" LED Lens Module.


Need Help?

- 1 Select between fixed tracks or adjustable tracks.
- 2 Select your suspension distance from the ceiling or wall depending on where its mounted.
- 3 State the length and shape of the structure you want to build that will house the light fixtures, per run if multiple runs.
- 4 Advise which fixtures and how many you want in each Run.

Email sales@eurofase.com for further inquiries

MAST

TRACK CONNECTING SYSTEM COMBO


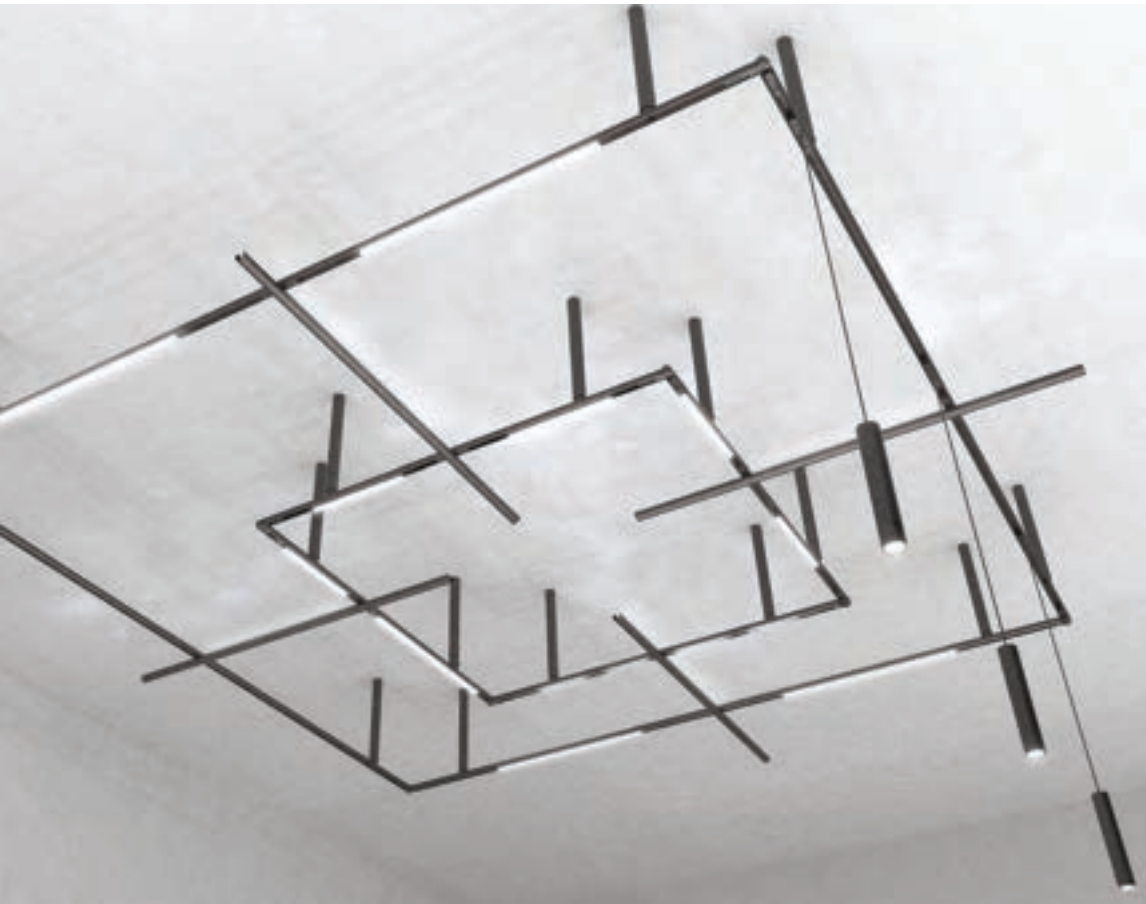


TT + ITI Connections:

Mesh Light Application

Using Mesh Cross Connector
36293-01

Cross Connection



ITEM #	COMPONENTS USED	LEGEND	QUANTITY USED	ITEM #	COMPONENTS USED	LEGEND	QUANTITY USED
36281-01 72" (1828mm)		A	4	36297-01		M2	1
36283-01 36" (914mm)		B	8	36300-01		O1	1
36285-01 36" (914mm)		C	12	36301-01		O2	1
36289-01		E	1	36302-01		O3	2
36290-01		F	11				
36291-01		G	8	MODULES	COMPONENTS USED	QUANTITY USED	
36294-01		K	1	36499-01		10	
36293-01		I	8	36520-01		3	
36296-01		M1	3				

MAST


LIGHT PHOTOMETRICS

LENS

36500-01




H(m)	D(m)	E(lx)
110°		
1.0	2.88	223
2.0	5.76	55
3.0	8.64	24
4.0	11.52	14
5.0	14.40	8



36499-01




H(m)	D(m)	E(lx)
110°		
1.0	2.52	129
2.0	5.04	32
3.0	7.56	14
4.0	10.09	8
5.0	12.61	5



36498-01



H(m)	D(m)	E(lx)
110°		
1.0	2.93	39
2.0	5.87	9
3.0	8.81	4
4.0	11.75	2
5.0	14.69	1




SPOT

36512-01




H(m)	D(m)	E(lx)
20°		
1.0	0.38	1505
2.0	0.77	376
3.0	1.15	167
4.0	1.54	94
5.0	1.92	60



36513-01



H(m)	D(m)	E(lx)
20°		
0.5	0.16	2351
1.0	0.33	587
1.5	0.50	261
2.0	0.67	146
2.5	0.84	4



Zoom in 20°

MAST


LIGHT PHOTOMETRICS



SUSPENSION

36520-01

H(m)	D(m)	E(lx)
20°		
1.0	0.38	1476
2.0	0.77	369
3.0	1.16	164
4.0	1.55	92
5.0	1.94	59




MULTIPLES

36517-01



H(m)	D(m)	E(lx)
30°		
1.0	0.62	1854
2.0	1.24	463
3.0	1.86	206
4.0	2.48	115
5.0	3.10	74




ROUTE

The Route system is yet another modern-day track lighting system. It's similar to Construct in shape and concept. The main difference being that Route is a 120V system thus no remote power supply is required. There are 3 components required to make up a lighting system with Route: the aluminum channels, connectors/power feeds and the lighting fixtures.

There are 3 different types of aluminum channels to choose from: recessed trimless, surface mount or pendant mount. Various power and connector accessories allow you to configure your channel design in various 90° shapes. Lighting fixtures snap, twist and lock into place at the back of the aluminum channel. Within the Route System, power originates from the 120V line that is brought to the power joints. These accessories have a steel box to accommodate the incoming power and a 6' tail with a molex connector to connect to the first fixture. As all the light fixtures have a lead on each end, power runs from one fixture to another. At the end of installation the black lens is cut and installed between the fixtures to hide the wires at the back of the channel.

With a wide range of light fixtures and channels to choose from, the Route system is the perfect solution for a fully functional contemporary track lighting system.

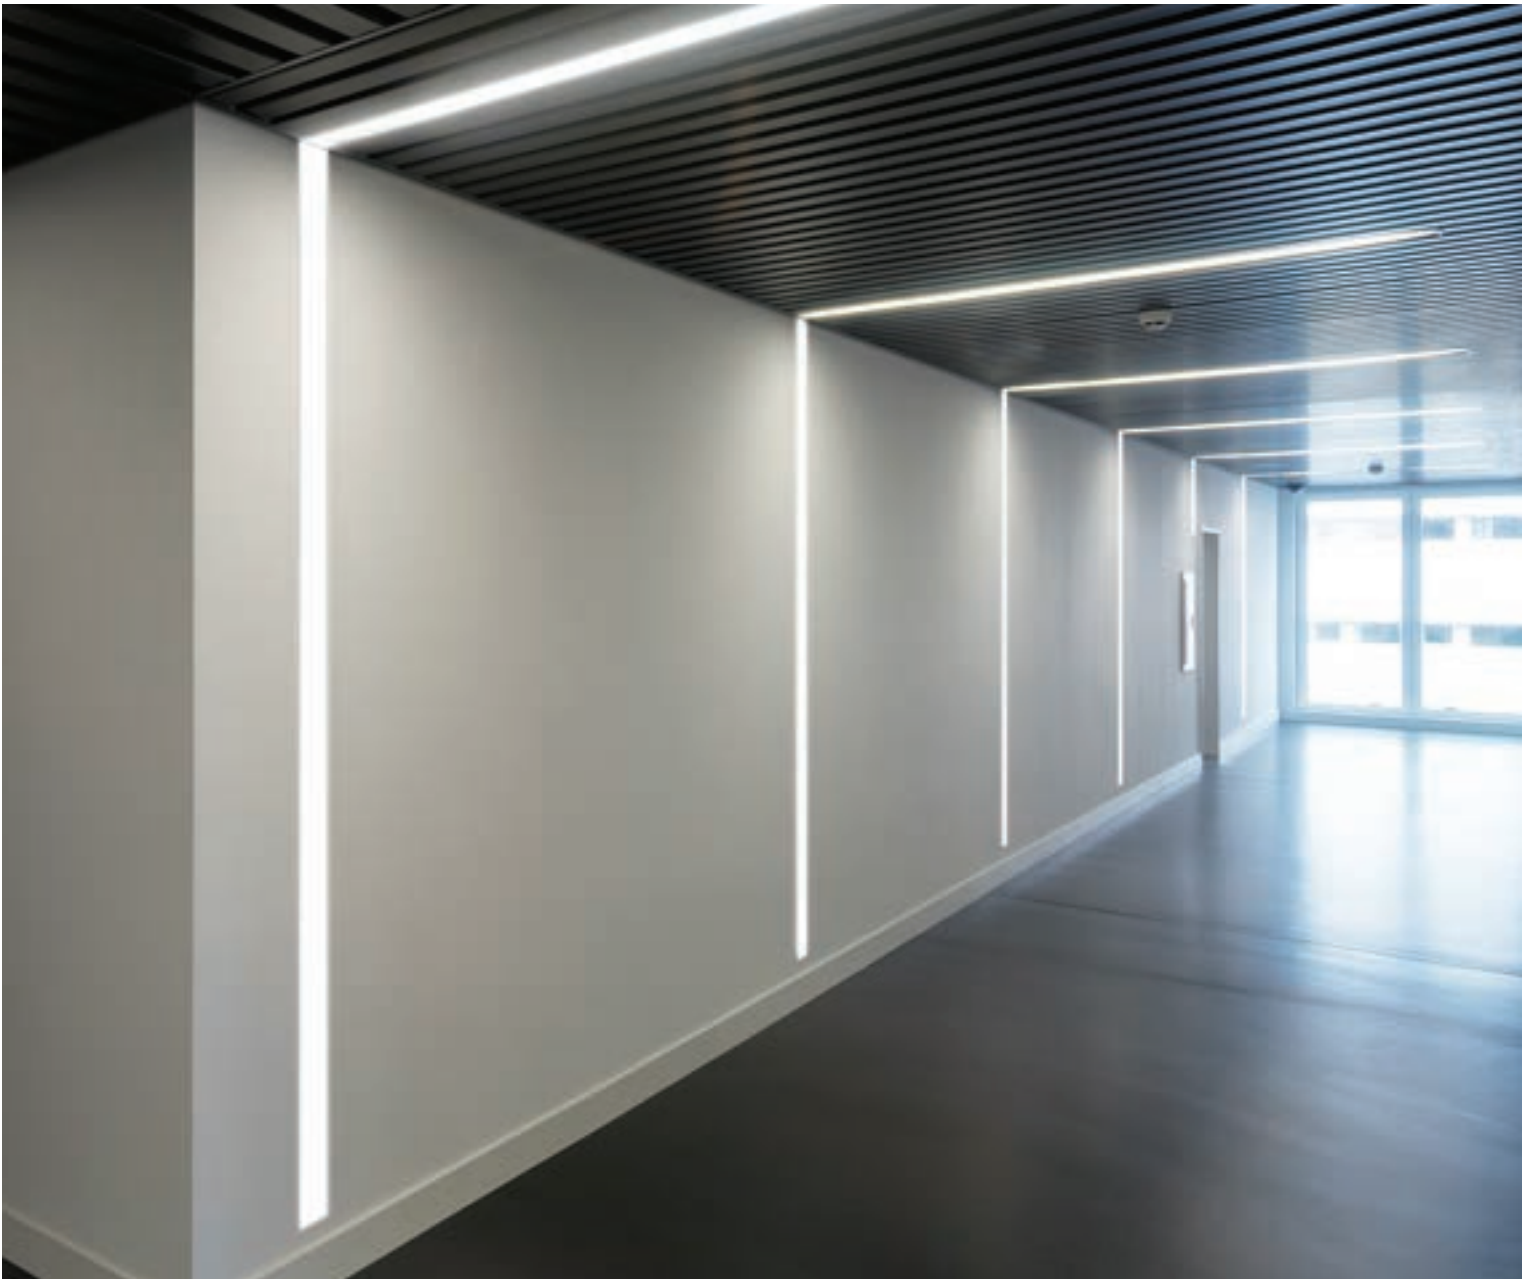

ROUTE

LIGHT FIXTURES

PAGE 199




SPOTS

PAGE 201




DOWNLIGHT

PAGE 203

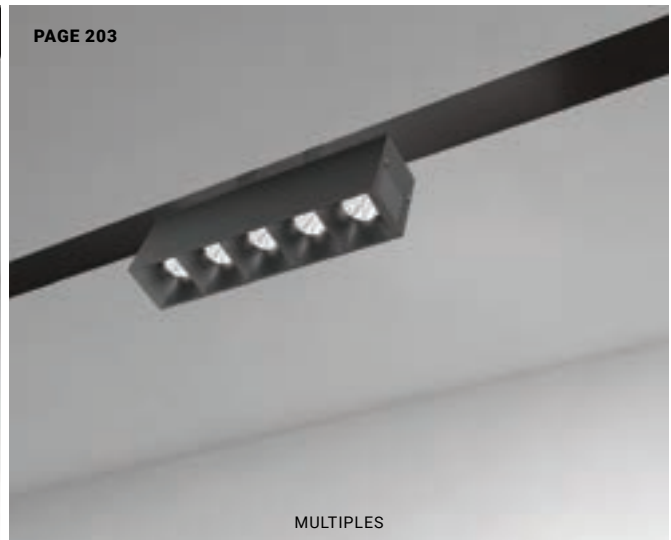

MULTIPLES


PAGE 205

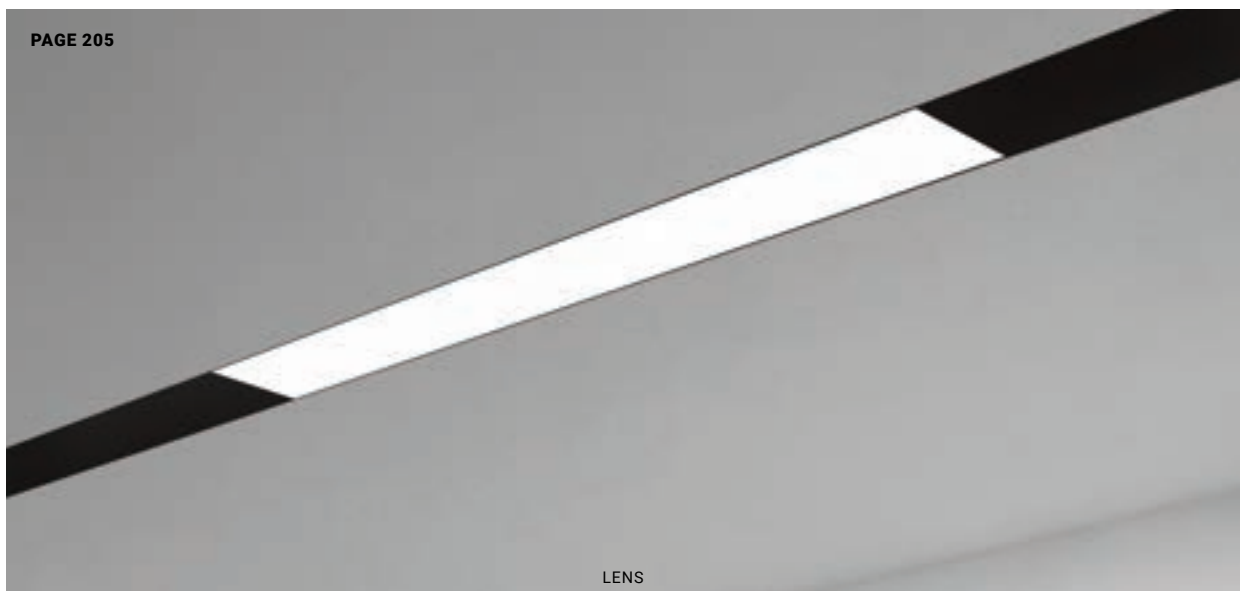

LENS

ROUTE
MOUNTING OPTIONS

PENDANT

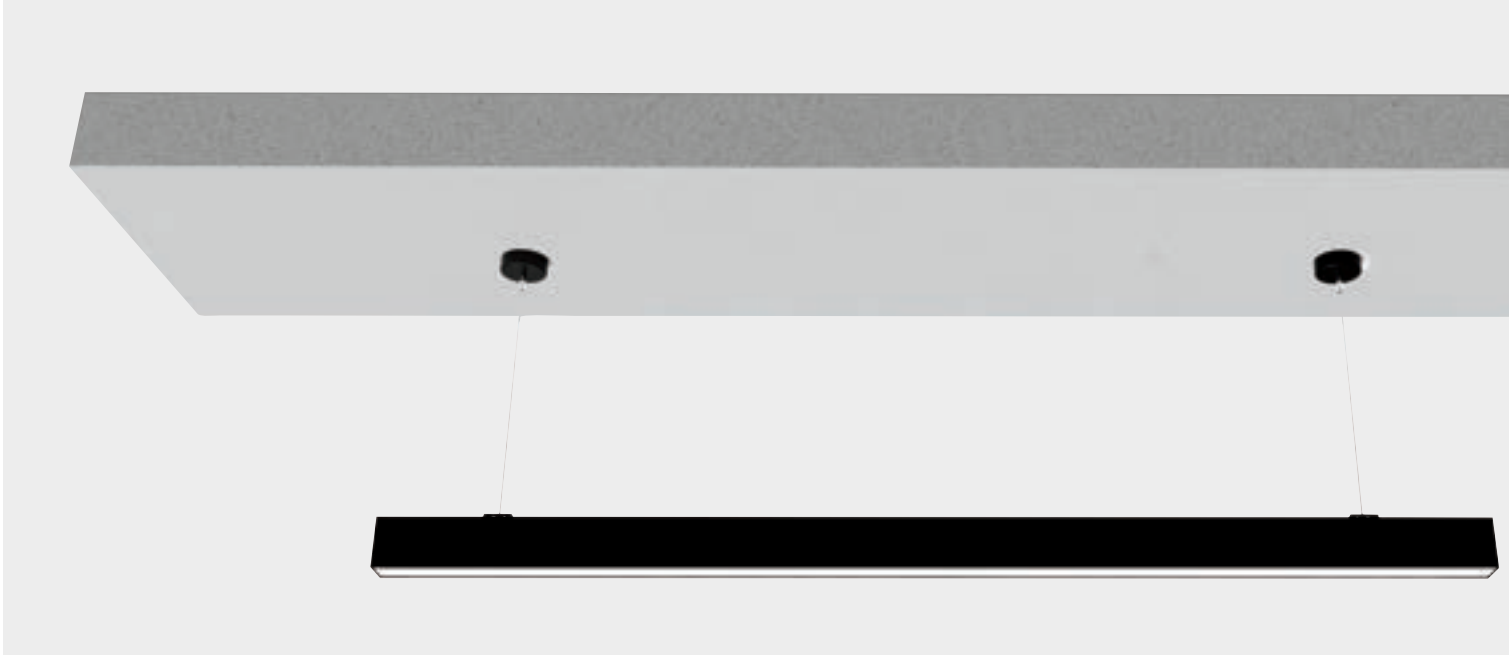

SURFACE MOUNT




ROUTE
MOUNTING OPTIONS


TRIMLESS RECESSED
(Drywall Installation)



MOUNT BETWEEN WALLS

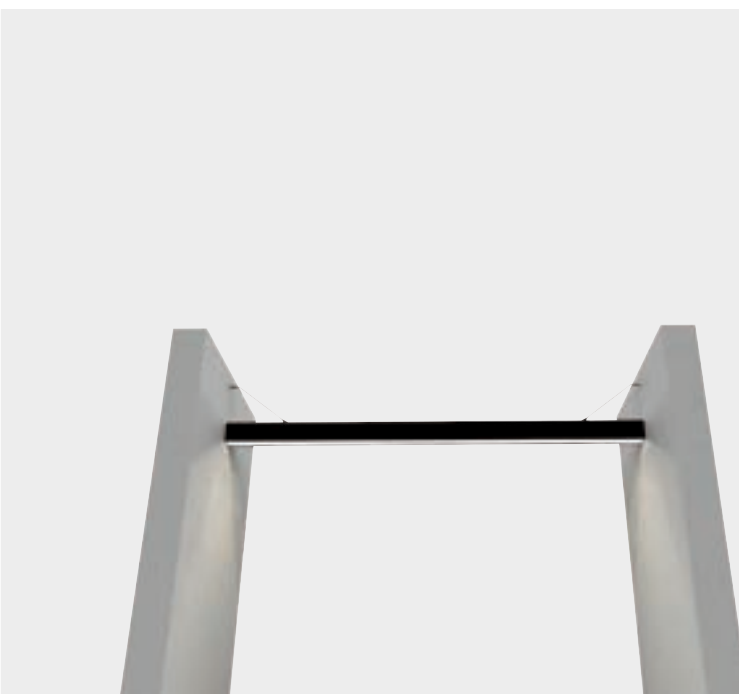

OPTION A

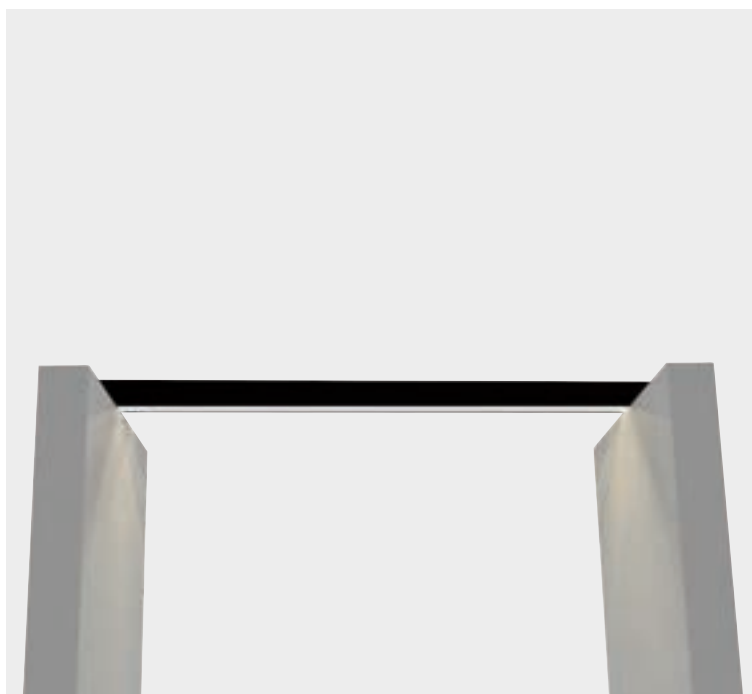


OPTION B

ROUTE

MOUNTING APPLICATIONS


SURFACE MOUNT / PENDANT / MOUNTED BETWEEN WALLS NON-ELECTRICAL CHANNELS

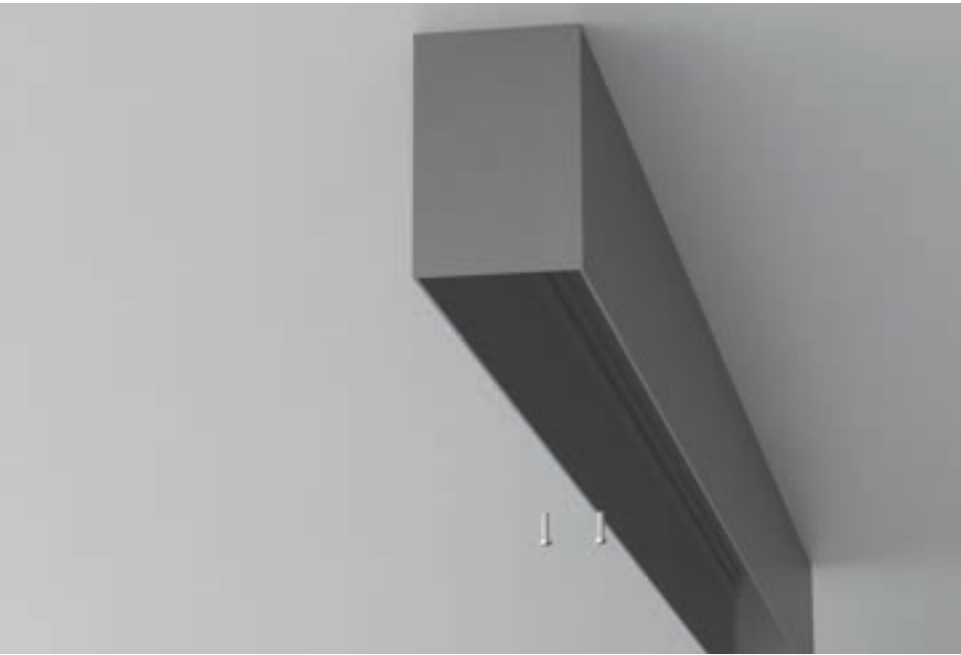

Surface mounted type

3.74"
(95mm)

2.59"
(66mm)

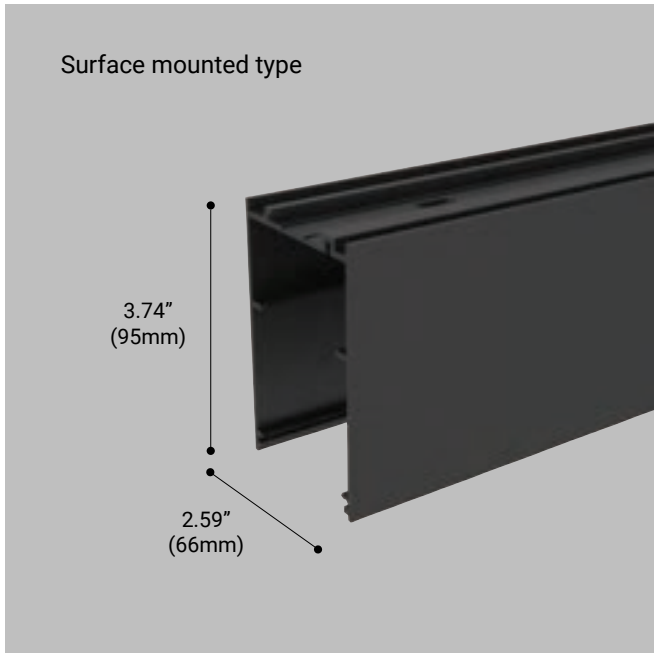

CHANNEL LENGTH OPTIONS:

ITEM#	FINISH	LENGTHS
36433-01*	Matte Black	6ft. (1828mm)
36434-01*	Matte Black	8ft. (2438mm)
36435-01*	Matte Black	10ft. (3048mm)

*Field Cuttable

Black Cover Lens included with Channel



36441-01
End Cap


CONNECTIONS & CORNER PROFILE OPTION:



36439-01 Surface or Pendant Mount
Horizontal Corner L-Shaped
Connector for Ceiling or Wall

7.20"
(183mm)

7.20"
(183mm)

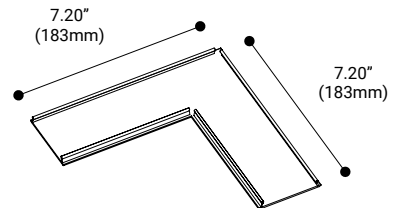

36442-013
Connecting Bracket



36833-016
POWER JOINT



36448-01
PENDANT KIT with POWER CORD



36450-01
PENDANT KIT without POWER CORD



36444-019
CABLE TIE





36902-019
1 METER (39") EXTENSION CABLE



ROUTE
MOUNTING APPLICATIONS

TRIMLESS RECESSED DRYWALL INSTALLATION
NON-ELECTRICAL CHANNELS

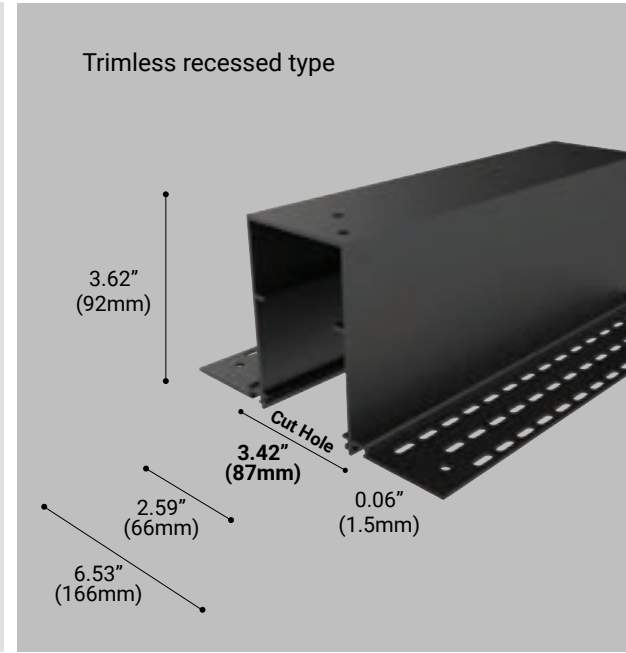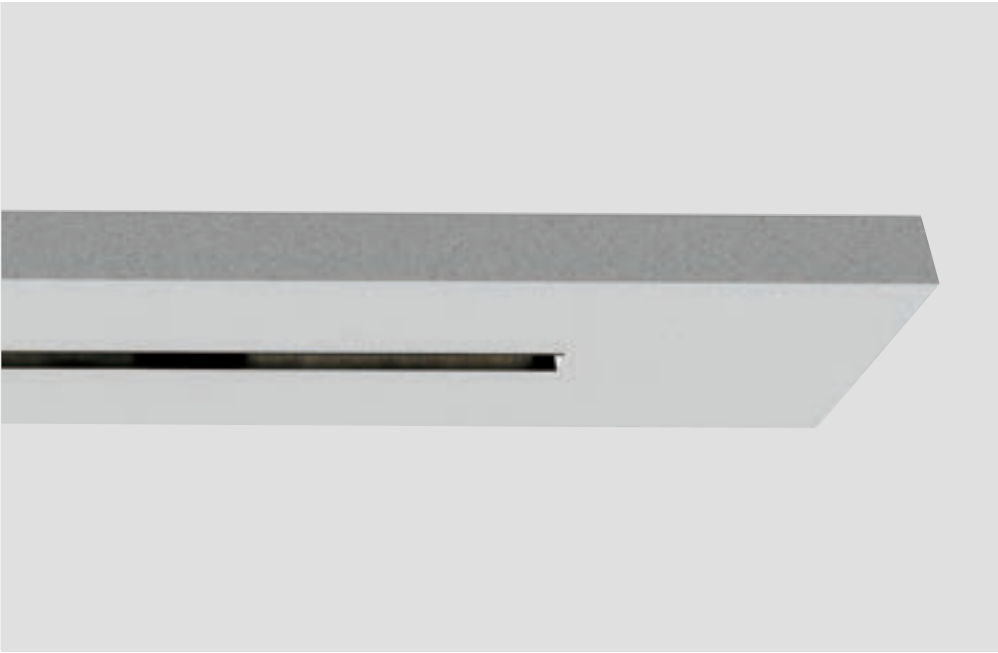

CHANNEL LENGTH OPTIONS:

ITEM#	FINISH	LENGTHS
36436-01*	Matte Black	6ft. (1828mm)
36437-01*	Matte Black	8ft. (2438mm)
36438-01*	Matte Black	10ft. (3048mm)

***Field Cuttable**

Black Cover Lens included with Channel




36441-01
End Cap

CONNECTIONS & CORNER PROFILE OPTION:



36440-01

Trimless Recessed Horizontal
Corner for L-Shaped Connector

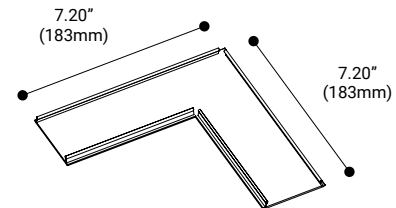

36443-017

Connecting Bracket



36833-016
POWER JOINT



36444-019
CABLE TIE




36902-019
1 METER (39") EXTENSION CABLE



ROUTE

SPOTS

Spot Luminaires are small aperture mini cylindrical shaped light fixtures that are both rotatable and directional and are available as single or double units. Route Spots are powerful and perfect for precise accent lighting applications.

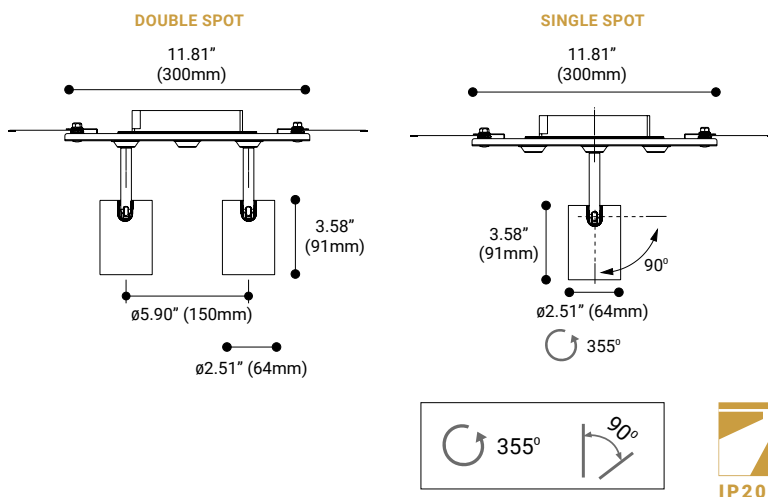

STANDARD SPECIFICATIONS

Light Source:	Integrated LED
Beam Angle:	30°
Kelvin:	3000K
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black
Input:	120V AC
Approval:	Dry
Electrical Approval:	COMPLIANT
Warranty:	



TRIAC: 36460-01
0-10V: 36461-01
DOUBLE SPOT FIXTURE

LAMPING

LED Wattage: 30W
Initial Lumens: 2309 Lm
Delivered Lumens: 1477 Lm
Beam Angle: 30°

DIMENSIONS

Fixture: 11.81"L x 3.58"H x 2.51"DIA x 2



TRIAC: 36458-01
0-10V: 36459-01
SINGLE SPOT FIXTURE

LAMPING

LED Wattage: 16.5W
Initial Lumens: 1154 Lm
Delivered Lumens: 622 Lm
Beam Angle: 30°

DIMENSIONS

Fixture: 11.81"L x 3.58"H x 2.51"DIA

ROUTE CHANNELS ROUTE CONNECTORS + ACCESSORIES

PAGE 197 - 198

PAGE 207

ORDERING OPTIONS

ITEM#	FINISH	DRIVER	ITEM#	FINISH	DRIVER
36458-01	Black	TRIAC	36460-01	Black	TRIAC
36459-01	Black	0-10V	36461-01	Black	0-10V






ROUTE

DOWNLIGHT

Downlight fixtures consist of three high powered LED modules equally spaced and built onto one solid light assembly. The modules sit flush to the channel lip. Downlight fixtures are used for general lighting purposes and perfect to use for long straight continuous runs.

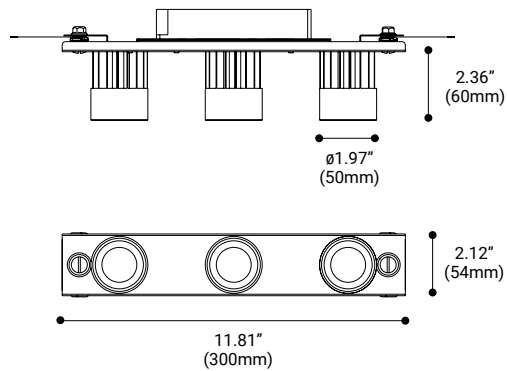

STANDARD SPECIFICATIONS

Light Source:	30W
Beam Angle:	38°
Initial Lumens:	2902 Lm
Delivered Lumens:	2332 Lm
Kelvin:	3000K
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black
Input:	120V AC
Approval:	Dry
Electrical Approval:	   COMPLIANT
Warranty:	

ROUTE CHANNELS PAGE 197 - 198
ROUTE CONNECTORS
+ ACCESSORIES PAGE 207

ORDERING OPTIONS


ITEM#	FINISH	DRIVER
36456-01	Black	TRIAC
36457-01	Black	0-10V



ROUTE

MULTIPLES

The multiples light fixture are linear clusters of LED modules that are built onto an aluminum frame with an adjustable bracket. As this fixture protrudes out of the channel, the adjustable bracket allows for the fixture to be directed either 45° facing forward or backward. The multiples light fixtures come in 3 sizes and are commonly used in Wall Wash, accent lighting, and directional general lighting.

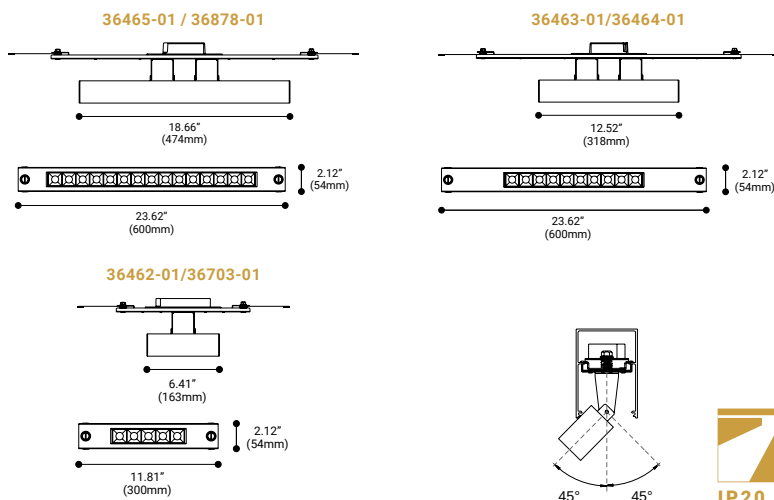

STANDARD SPECIFICATIONS

Light Source:	Integrated LED
Beam Angle:	30°
Kelvin:	3000K
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black
Input:	120V AC
Approval:	Dry
Electrical Approval:	COMPLIANT
Warranty:	

TRIAC: 36465-01
0-10V: 36878-01



LAMPING

LED Wattage: 36W
 Initial Lumens: 2919 Lm
 Delivered Lumens: 2576 Lm
 Beam Angle: 30°

DIMENSIONS

Fixture: 18.66"L x 2.12"W x 4"H

TRIAC: 36463-01
0-10V: 36464-01



LAMPING

LED Wattage: 24W
 Initial Lumens: 1946 Lm
 Delivered Lumens: 1662 Lm
 Beam Angle: 30°

DIMENSIONS

Fixture: 12.52"L x 2.12"W x 4"H

TRIAC: 36462-01
0-10V: 36703-01



LAMPING

LED Wattage: 12W
 Initial Lumens: 973 Lm
 Delivered Lumens: 815 Lm
 Beam Angle: 30°

DIMENSIONS

Fixture: 6.41"L x 2.12"W x 4"H

ROUTE CHANNELS PAGE 197 - 198

**ROUTE CONNECTORS
 + ACCESSORIES** PAGE 207

ORDERING OPTIONS


ITEM#	FINISH	DRIVER	ITEM#	FINISH	DRIVER	ITEM#	FINISH	DRIVER
36465-01	Black	TRIAC	36463-01	Black	TRIAC	36462-01	Black	TRIAC
36878-01	Black	0-10V	36464-01	Black	0-10V	36703-01	Black	0-10V



ROUTE

LENS

Lens light fixtures are the perfect choice for continuous linear lighting. The opal lens sits flush in the channel and diffuses glare and contrast nicely with the black cover lens when used as original units. Route Lens fixtures are sold in 3 sizes and can be joined together for continuous runs.

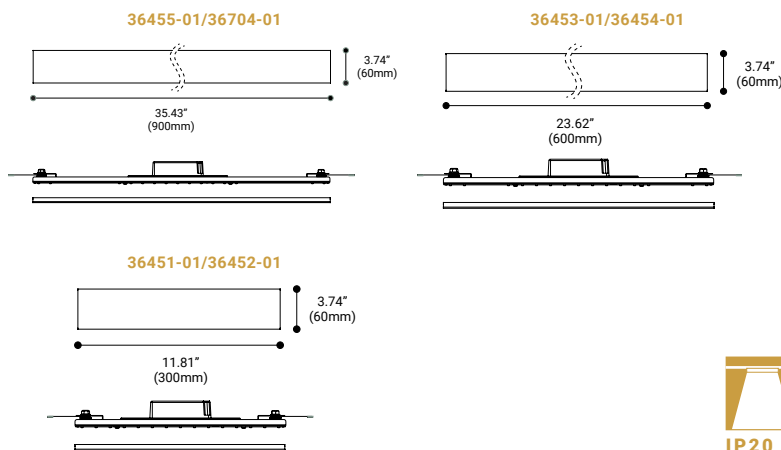

STANDARD SPECIFICATIONS

Light Source:	Integrated LED
Beam Angle:	115°
Kelvin:	3000K
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black
Input:	120V AC
Approval:	Dry
Electrical Approval:	COMPLIANT
Warranty:	

TRIAC: 36455-01*
0-10V: 36704-01*



LAMPING

LED Wattage: 36W
Initial Lumens: 5171 Lm
Delivered Lumens: 1908 Lm

DIMENSIONS

Fixture: 35.43"L x 3.74"W x 2.36"H

TRIAC: 36453-01*
0-10V: 36454-01*



LAMPING

LED Wattage: 24W
Initial Lumens: 3338 Lm
Delivered Lumens: 1273 Lm

DIMENSIONS

Fixture: 23.62"L x 3.74"W x 2.36"H

TRIAC: 36451-01*
0-10V: 36452-01*



LAMPING

LED Wattage: 12W
Initial Lumens: 1821 Lm
Delivered Lumens: 610 Lm

DIMENSIONS

Fixture: 11.81"L x 3.74"W x 2.36"H

ROUTE CHANNELS PAGE 197 - 198

**ROUTE CONNECTORS
+ ACCESSORIES** PAGE 207

ORDERING OPTIONS

ITEM#	FINISH	DRIVER	ITEM#	FINISH	DRIVER	ITEM#	FINISH	DRIVER
36455-01*	Black	TRIAC	36453-01*	Black	TRIAC	36451-01*	Black	TRIAC
36704-01*	Black	0-10V	36454-01*	Black	0-10V	36452-01*	Black	0-10V



ROUTE
ACCESSORIES

		RECESSED	MOUNT BETWEEN WALLS (Option A)	MOUNT BETWEEN WALLS (Option B)	SURFACE MOUNTED	PENDANT
END CAP 36441-01		•	•	•	•	•
CONNECTING BRACKET 36442-013					•	
CONNECTING BRACKET 36443-017		•				
CABLE TIE 36444-019		•	•	•	•	•
POWER JOINT (TRIAC DIMMING) JUNCTION BOX INCLUDED 36833-016		•	•	•	•	•
POWER JOINT (0-10V DIMMING) JUNCTION BOX INCLUDED 36834-013		•	•	•	•	•
MOUNTING CLIP 36445-017			•			
HANGING WIRE 36449-012			•			
MOUNTING CLIP 36446-014				•		
PENDANT KIT WITH POWER CORD 36448-01						•
PENDANT KIT WITHOUT POWER CORD 36450-01						•
1 METER (39") EXTENSION CABLE 36902-019		•	•	•	•	•



Need Help?


- 1 Choose your application between trim, trimless recessed, surface mount or pendant mount channels
- 2 Identify the length and shape of each run
- 3 Pick the fixtures and how many you want to use in each run

Email sales@eurofase.com for further inquiries


ROUTE
INSTALLATIONS

3 WIRES - TRIAC DIMMING


STEP
01:

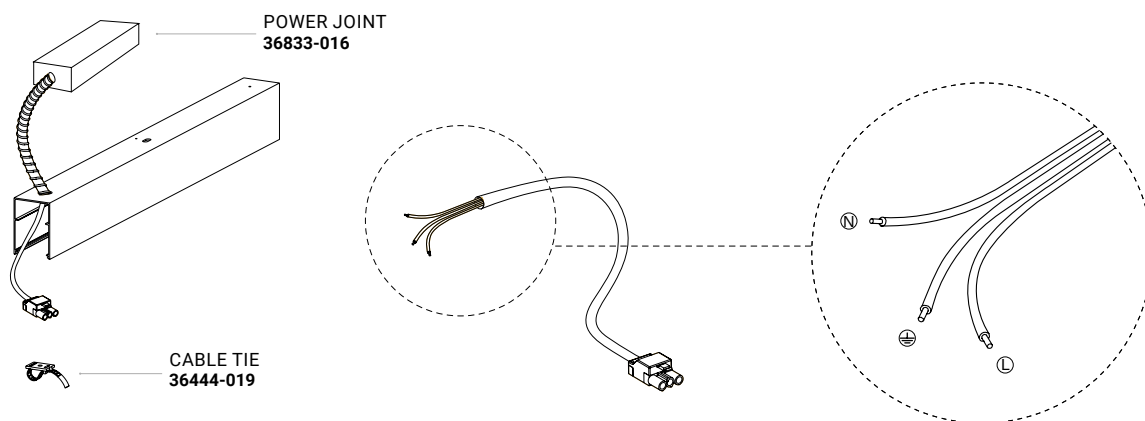

STEP
02:

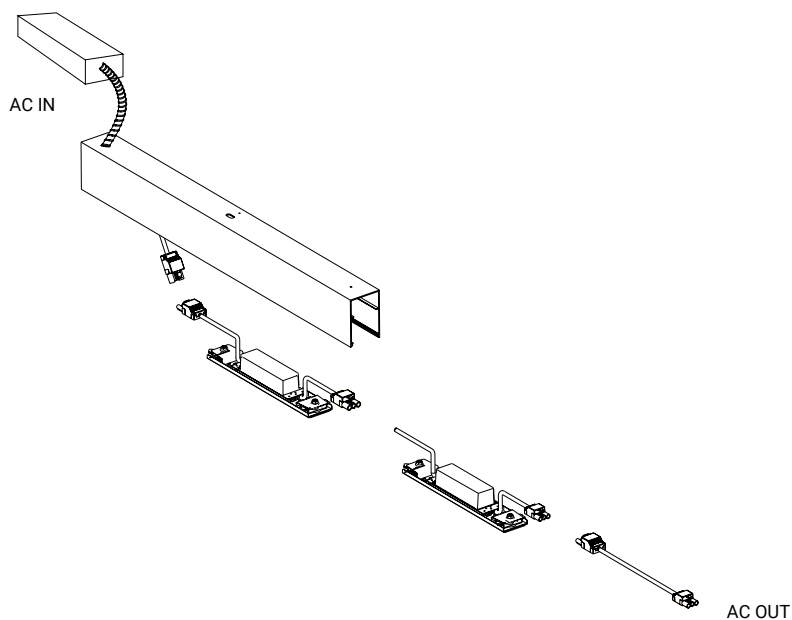


STEP
03:

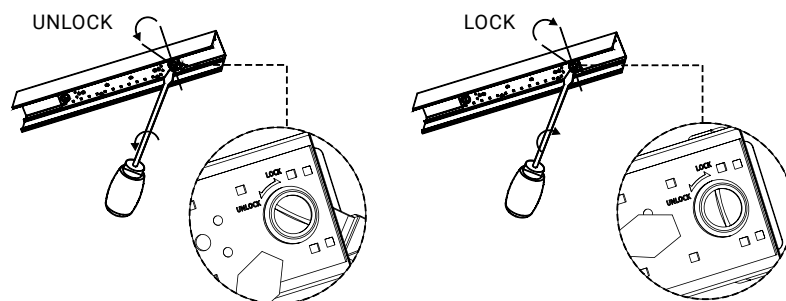


ROUTE
INSTALLATIONS

3 WIRES - 0-10V DIMMING


STEP
01:

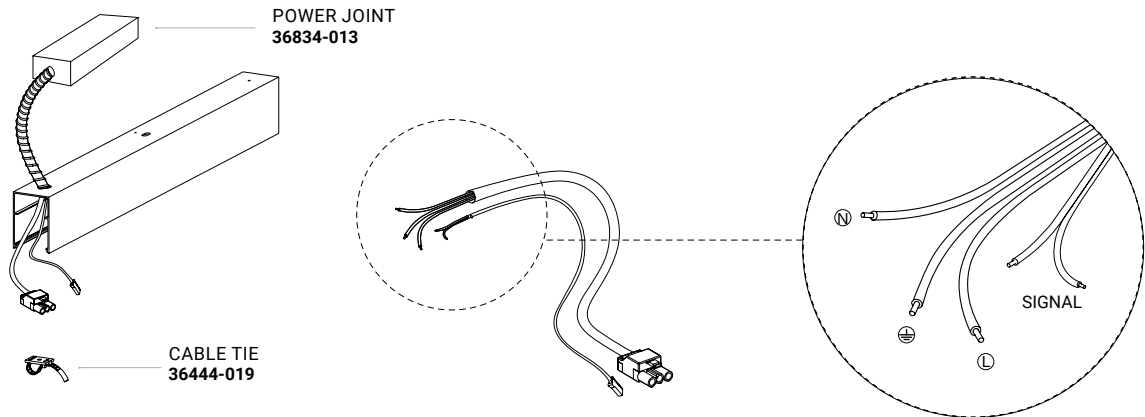

STEP
02:

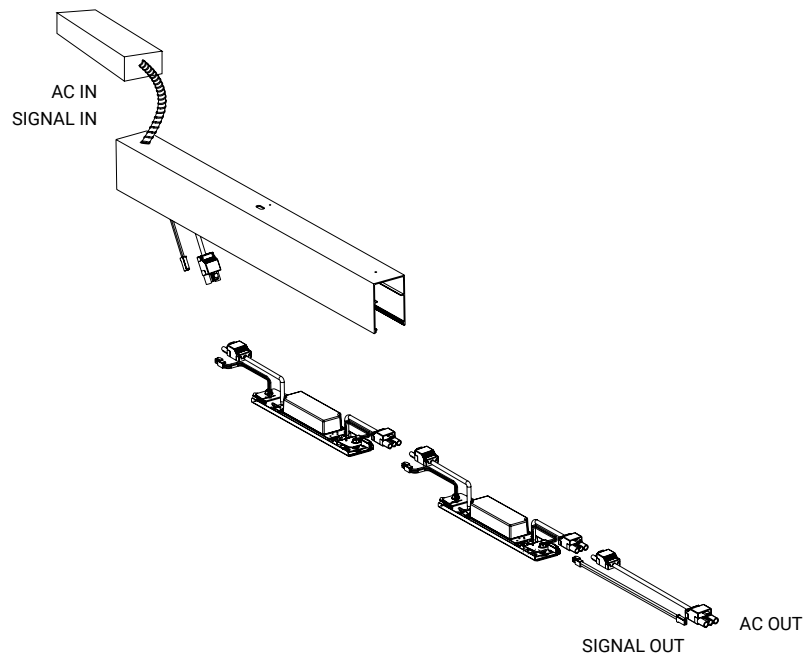

STEP
03:

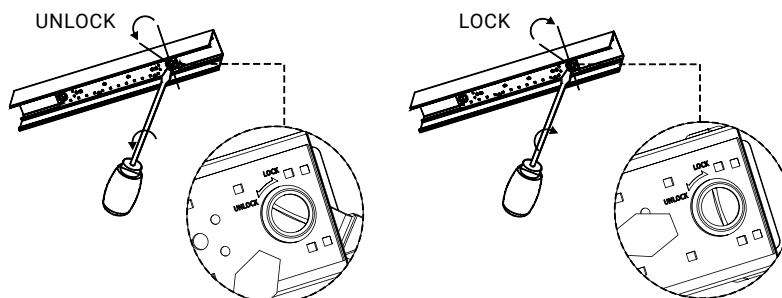

ROUTE
INSTALLATIONS


STEP
04:



STEP
05:




STEP
06:

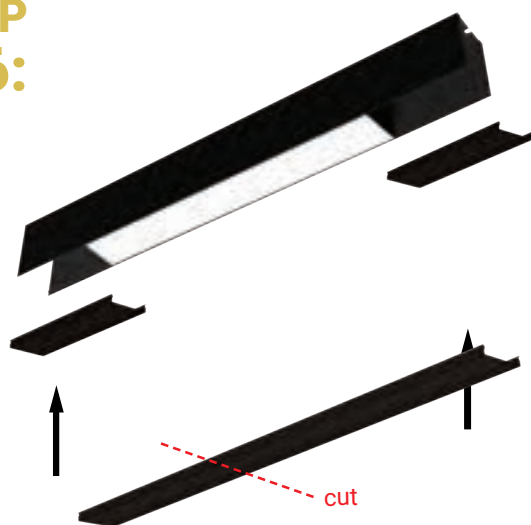


STEP
07:



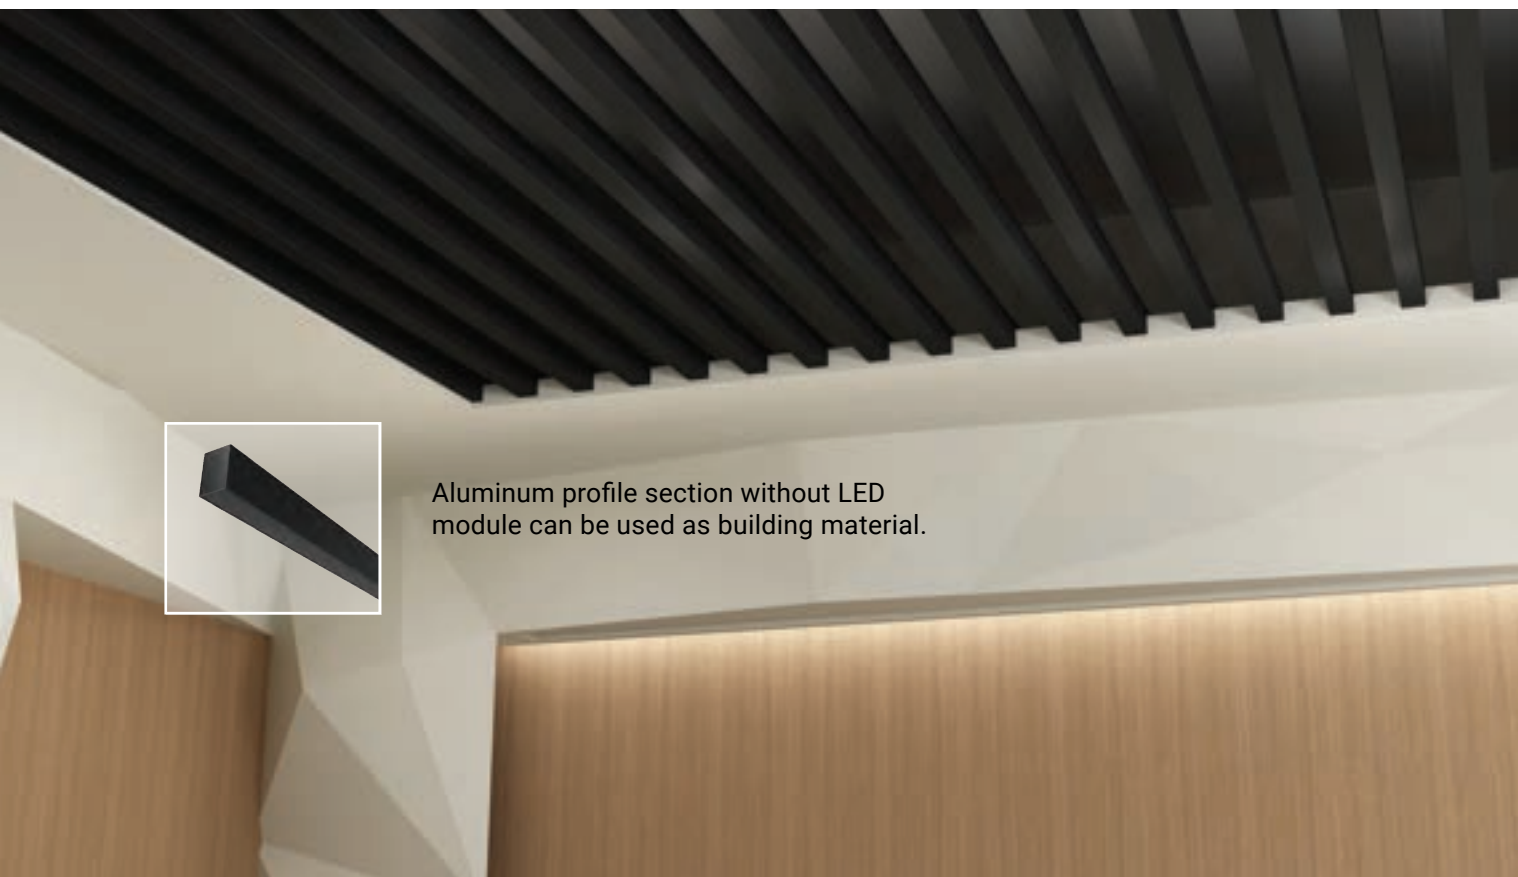




Aluminum profile section without LED module can be used as building material.

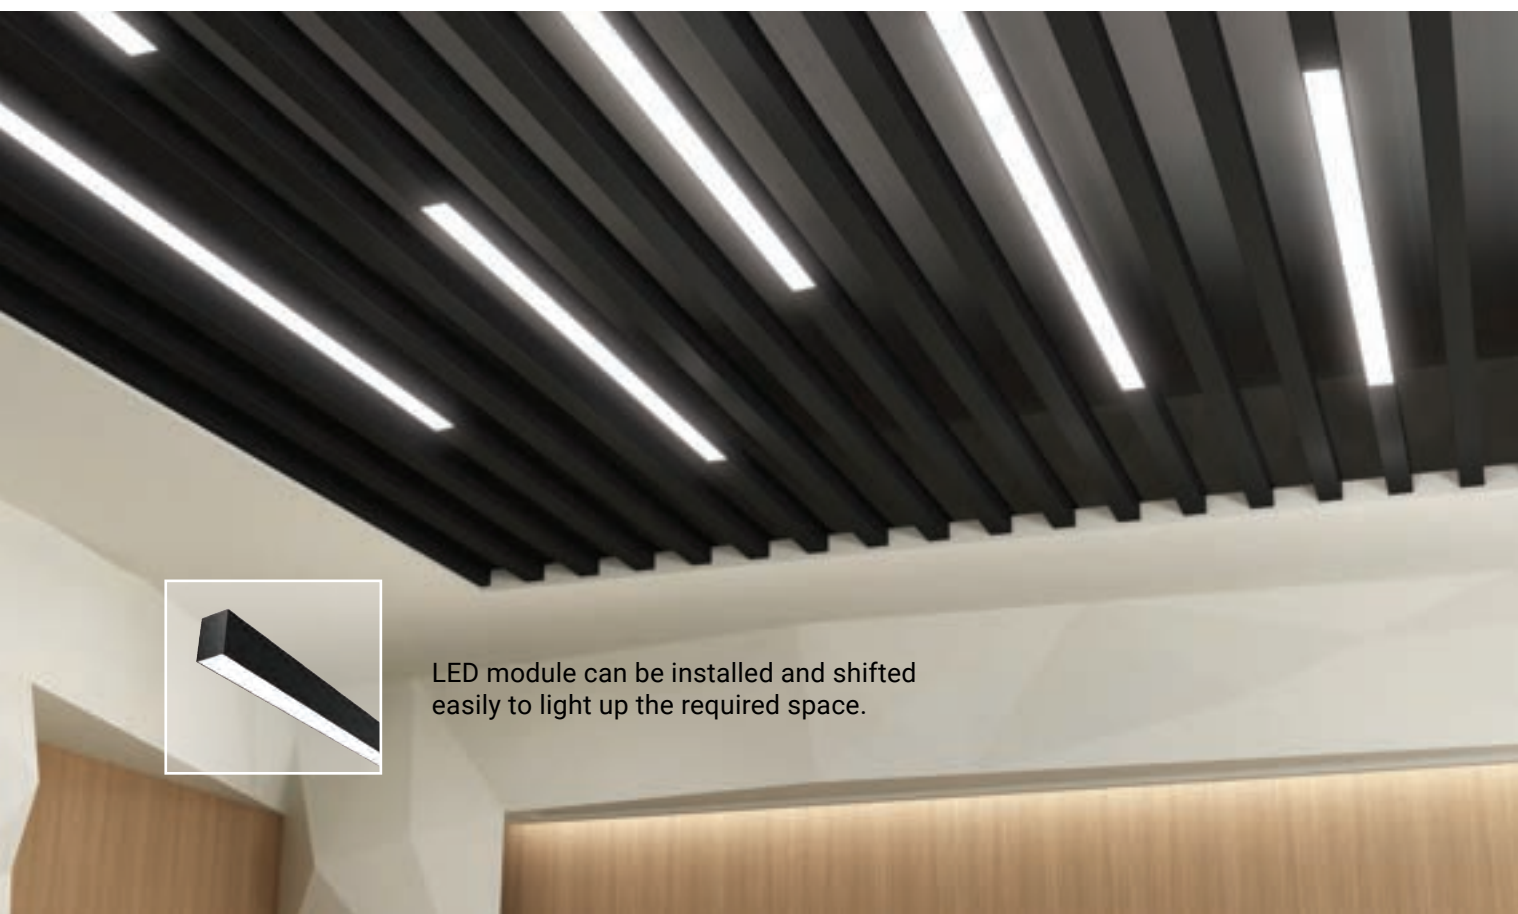


LED module can be installed and shifted easily to light up the required space.

ROUTE INSTALLATIONS

APPLICATION TRIMLESS RECESSED

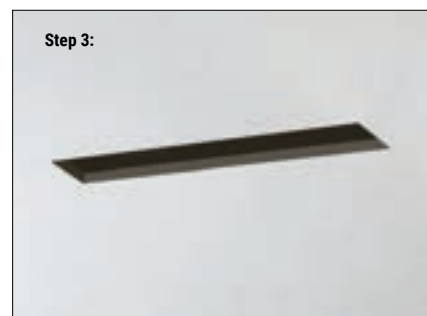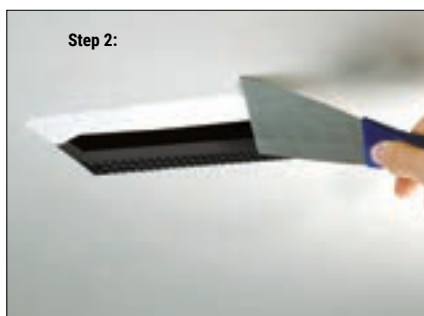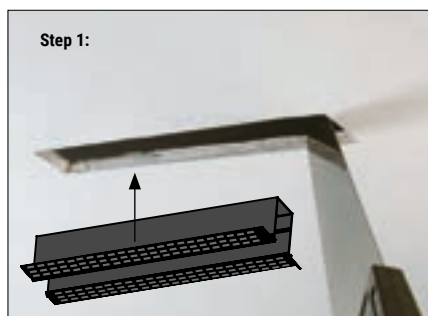

APPLICATION SURFACE MOUNTED

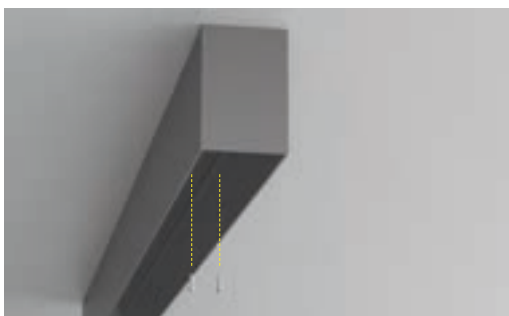

Use screws (not included) to secure to drywall

APPLICATION PENDANT




Use the Pendant Kit to secure the track section.

ROUTE INSTALLATIONS


APPLICATION MOUNT BETWEEN WALLS OPTION A



Step 1:




Step 2:



Use the wall mounting clip (36445-017) to secure the track section.


APPLICATION MOUNT BETWEEN WALLS OPTION B



Use the mounting clip (36446-014) to secure the track section.

ROUTE

LIGHT PHOTOMETRICS

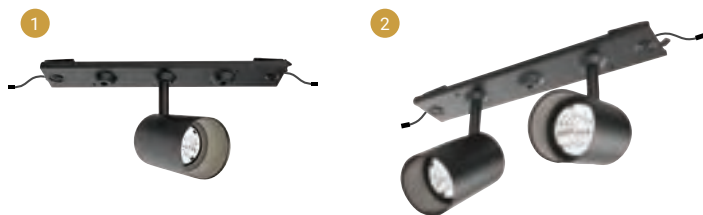


SPOT

1 TRIAC: 36458-01
0-10V: 36459-01

2 TRIAC: 36460-01
0-10V: 36461-01

H(m)	D(m)	E(lx)
30°		
1.0	0.58	1560
2.0	1.16	389
3.0	1.74	173
4.0	2.32	97
5.0	2.91	62




MULTIPLES

TRIAC: 36465-01
0-10V: 36878-01




H(m)	D(m)	E(lx)
30°		
1.0	0.61	5925
2.0	1.22	1481
3.0	1.83	658
4.0	2.44	370
5.0	3.05	237



TRIAC: 36463-01
0-10V: 36464-01




H(m)	D(m)	E(lx)
30°		
1.0	0.62	3791
2.0	1.24	947
3.0	1.86	421
4.0	2.48	236
5.0	3.10	151



TRIAC: 36462-01
0-10V: 36703-01



H(m)	D(m)	E(lx)
30°		
1.0	0.61	1905
2.0	1.22	476
3.0	1.84	211
4.0	2.45	119
5.0	3.07	76



ROUTE

LIGHT PHOTOMETRICS


LENS

TRIAC: 36455-01*

0-10V: 36704-01*



H(m)	D(m)	E(lx)
115°		
1.0	3.05	659
2.0	6.11	164
3.0	9.16	73
4.0	12.22	41
5.0	15.28	26




TRIAC: 36453-01*

0-10V: 36454-01*



H(m)	D(m)	E(lx)
115°		
1.0	3.03	441
2.0	6.17	110
3.0	9.11	49
4.0	12.15	27
5.0	15.19	17




TRIAC: 36451-01*

0-10V: 36452-01*



H(m)	D(m)	E(lx)
115°		
1.0	3.05	212
2.0	6.11	53
3.0	9.17	23
4.0	12.23	13
5.0	15.29	8




DOWN LIGHT

TRIAC: 36456-01

0-10V: 36457-01



H(m)	D(m)	E(lx)
38°		
1.0	0.67	3884
2.0	1.34	971
3.0	2.01	431
4.0	2.68	242
5.0	3.35	155



MUCCI

The Mucci family is a stunning new collection consisting of suspended round and rectangular chandeliers that are highly customizable, and are available in various sizes. All of the fixtures are available with either an inward or outward LED band. These ring fixtures come standard in black finish and 3000K CCT. They also come with 120V drivers that are forward phase (TRIAC) dimming. What makes the Mucci family unlike any other is its ability to apply a range of lighting fixtures to either the inside or outside of the ring itself.

The Mucci family is able to provide general and accent lighting applications, including glow lanterns and spot lights. Up to 70W of fixtures can be added to the rail on the ring and are powered by a separate TRIAC dimming driver inside the canopy. Allowing you to have an entire fixture on separate circuits. Possible modifications to this family may include switching to 0-10V dimming drivers or supplying the fixture in various color finishes or different CCT's. Due to its versatility, the Mucci family is suitable for a vast amount of lighting installations and applications; residential, commercial, retail, hospitality, the list is endless.



M U C C I


FIXTURES

PAGE 221



ROUND INWARD

PAGE 223

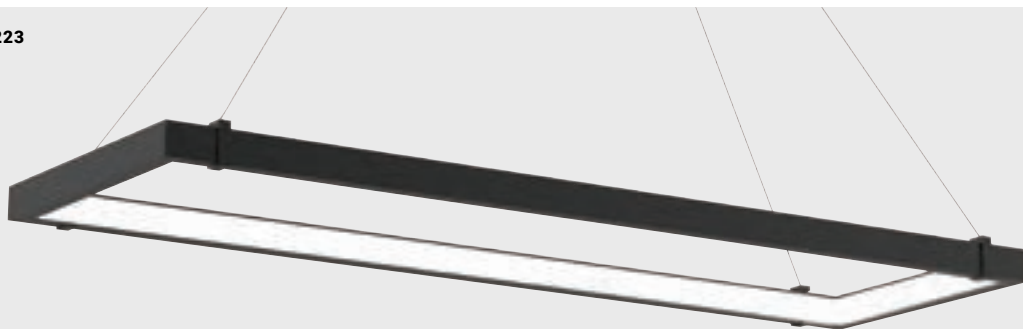

RECTANGLE INWARD

PAGE 227



ROUND OUTWARD

MUCCI

INWARD LED

This inward LED band offers bright illumination directed within itself, casting a subtle glow above. The modern, matte black or white trim adds a minimalistic decorative element for multiple room settings. With three different sizes available, this LED ring can be housed in a small foyer or in a large conference room.





M U C C I

R O U N D I N W A R D L E D P E N D A N T

I N W A R D L E D



38136-016
[LED]



38134-012
[LED]



38135-019
[LED]

ROUND INWARD LED PENDANT


60"

SPECIFICATIONS

Item: 38136-016
Light Source: 88W Integrated LED
Kelvin: 3000K
Delivered Lumens: 3690 Lm
CRI: 90+
Hours: 50,000 hrs
Dimming: TRIAC

Dimensions

Fixture: 60"DIA x 2"H
Canopy: 11"DIA
Max Height: 120"

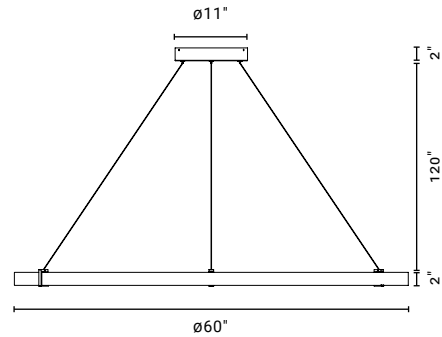


48"

SPECIFICATIONS

Item: 38135-019
Light Source: 73W Integrated LED
Kelvin: 3000K
Delivered Lumens: 3280 Lm
CRI: 90+
Hours: 50,000 hrs
Dimming: TRIAC

Dimensions

Fixture: 48"DIA x 2"H
Canopy: 9.5"DIA
Max Height: 120"

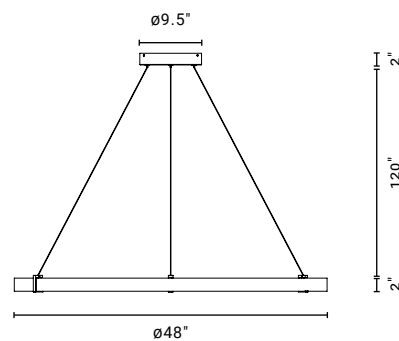


32"

SPECIFICATIONS

Item: 38134-012
Light Source: 54W Integrated LED
Kelvin: 3000K
Delivered Lumens: 2430 Lm
CRI: 90+
Hours: 50,000 hrs
Dimming: TRIAC

Dimensions

Fixture: 32"DIA x 2"H
Canopy: 9.5"DIA
Max Height: 120"

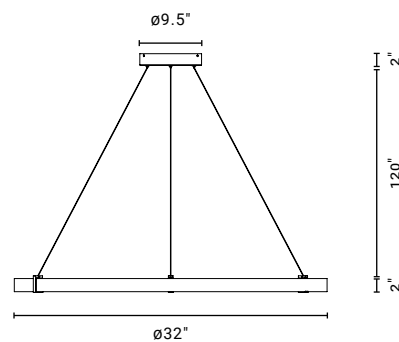


OPTIONAL MODULE ACCESSORIES (See Page 229 for details)

ANY COMBINATION UP TO 70W MAX

38205-019 10W LED GLOW BAR	38204-012 6W LED GLOW BAR	38141-010 13W LED ADJUSTABLE SPOT LIGHT	38141-010 13W LED ADJUSTABLE SPOT LIGHT	38142-017 10W LED FIXED DOWN LIGHT
-------------------------------	------------------------------	--	--	---------------------------------------

M U C C I

RECTANGULAR INWARD LED PENDANT

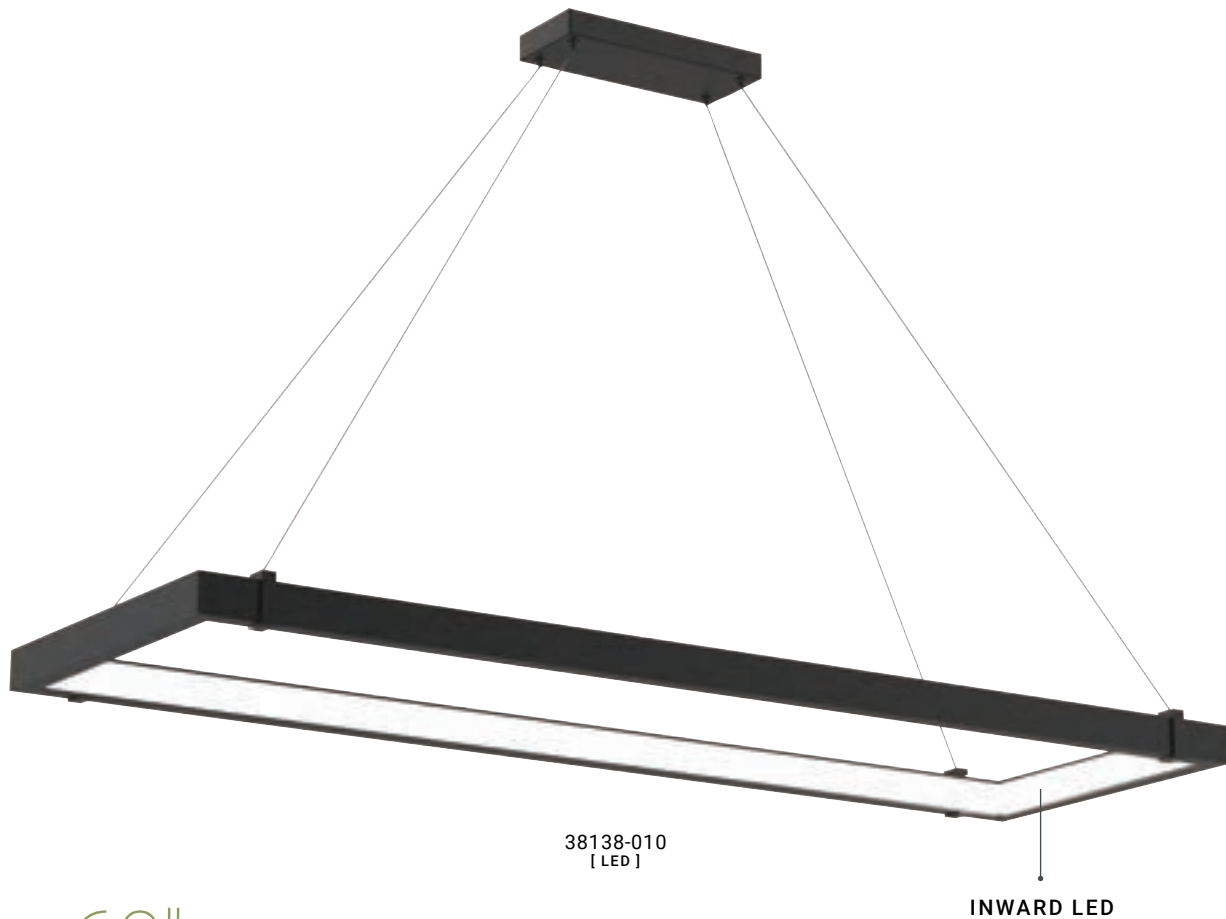


60"

SPECIFICATIONS

Item:	38138-010
Light Source:	76W Integrated LED
Kelvin:	3000K
Delivered Lumens:	3600 Lm
CRI:	90+
Hours:	50,000 hrs
Dimming:	TRIAC

Dimensions

Fixture:	59.5"L x 18.75"W x 2"H
Canopy:	11.75"L x 4.75"W
Max Height:	120"

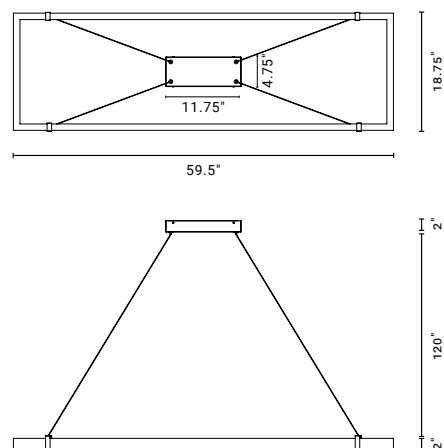

OPTIONAL MODULE ACCESSORIES (See Page 229 for details)

ANY COMBINATION UP TO 70W MAX

38205-019 10W LED GLOW BAR	38204-012 6W LED GLOW BAR	38141-010 13W LED ADJUSTABLE SPOT LIGHT	38141-010 13W LED ADJUSTABLE SPOT LIGHT	38142-017 10W LED FIXED DOWN LIGHT
--------------------------------------	-------------------------------------	---	---	--



MUCCI

OUTWARD LED

This outward LED band showcases a luminous halo, accented by a matte black trim. The outward direction of the LED lights create a distinct glow that is popular amongst modern commercial settings.





M U C C I

R O U N D O U T W A R D L E D P E N D A N T

OUTWARD LED



38133-015
[LED]



38131-011
[LED]



38132-018
[LED]

ROUND OUTWARD LED PENDANT


60"

SPECIFICATIONS

Item: 38133-015
Light Source: 84W Integrated LED
Kelvin: 3000K
Delivered Lumens: 3780 Lm
CRI: 90+
Hours: 50,000 hrs
Dimming: TRIAC

Dimensions

Fixture: 60"DIA x 2"H
Canopy: 11"DIA
Max Height: 120"

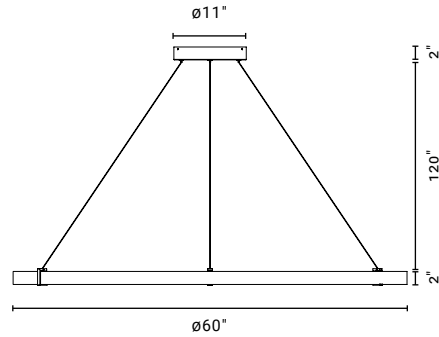


48"

SPECIFICATIONS

Item: 38132-018
Light Source: 70W Integrated LED
Kelvin: 3000K
Delivered Lumens: 3150 Lm
CRI: 90+
Hours: 50,000 hrs
Dimming: TRIAC

Dimensions

Fixture: 48"DIA x 2"H
Canopy: 9.5"DIA
Max Height: 120"

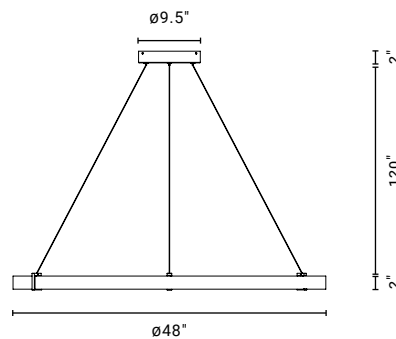


32"

SPECIFICATIONS

Item: 38131-011
Light Source: 52W Integrated LED
Kelvin: 3000K
Delivered Lumens: 2340 Lm
CRI: 90+
Hours: 50,000 hrs
Dimming: TRIAC

Dimensions

Fixture: 32"DIA x 2"H
Canopy: 9.5"DIA
Max Height: 120"

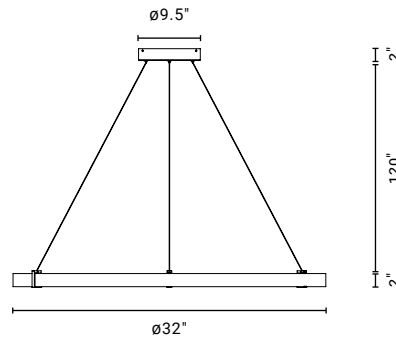

OPTIONAL MODULE ACCESSORIES (See Page 229 for details)

ANY COMBINATION UP TO 70W MAX

38205-019 10W LED GLOW BAR	38204-012 6W LED GLOW BAR	38141-010 13W LED ADJUSTABLE SPOT LIGHT	38141-010 13W LED ADJUSTABLE SPOT LIGHT	38142-017 10W LED FIXED DOWN LIGHT
-------------------------------	------------------------------	--	--	---------------------------------------

M U C C I
L I G H T M O D U L E S

01



38205-019
10W LED GLOW BAR

LAMPING


10W Integrated LED
Kelvin: 3000K
Delivered Lumens: 730 Lm
CRI: 90+
Hours: 50,000 HRS
Dimming: TRIAC

ADJUSTABLE HEAD

Cylindrical body for full 360° illumination
Diffused Light
Rotate: 100°, 240°

DIMENSIONS

1.25"DIA x 13"H

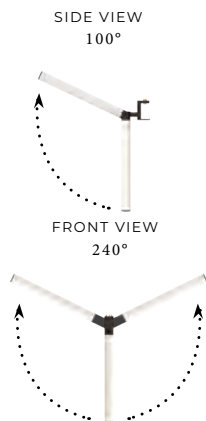

02



38204-012
6W LED GLOW BAR

LAMPING

6W Integrated LED
Kelvin: 3000K
Delivered Lumens: 370 Lm
CRI: 90+
Hours: 50,000 HRS
Dimming: TRIAC

ADJUSTABLE HEAD

Cylindrical body for full 360° illumination
Diffused Light
Rotate: 100°, 240°

DIMENSIONS

1.25"DIA x 8"H



M U C C I
L I G H T M O D U L E S

03



38141-010
13W LED ADJUSTABLE SPOT LIGHT

LAMPING

8W Integrated LED
Kelvin: 3000K
Delivered Lumens: 650 Lm
Beam Angle: 50°
CRI: 90+
Hours: 50,000 HRS
Dimming: TRIAC


ADJUSTABLE HEAD

Suit different application requirement
Rotate: 120°, 240°

DIMENSIONS

2.5"DIA x 5.5"H

SIDE VIEW
120°



FRONT VIEW
240°



04



38140-013
8W LED ADJUSTABLE SPOT LIGHT

LAMPING

8W Integrated LED
Kelvin: 3000K
Delivered Lumens: 650 Lm
Beam Angle: 50°
CRI: 90+
Hours: 50,000 HRS
Dimming: TRIAC


ADJUSTABLE HEAD

Suit different application requirement
Rotate: 110°, 240°

DIMENSIONS

2"DIA x 4.5"H

SIDE VIEW
110°



FRONT VIEW
240°



05



38142-017
10W LED FIXED DOWN LIGHT

LAMPING

10W Integrated LED
Kelvin: 3000K
Delivered Lumens: 480 Lm
Beam Angle: 160°
CRI: 90+
Hours: 50,000 HRS
Dimming: TRIAC

FIXED HEAD

Diffused Lens

DIMENSIONS

3"DIA x 1"H

SIDE VIEW
0°



FRONT VIEW
0°



C U S T O M I Z A T I O N

Custom lighting made just the way you want it. This low-voltage system creates a safe environment that reduces the risk of shock despite its exposed copper rail. After selecting your pendant, add your accessories based on functionality and style. A special hook design allows for easy attachment to hang modules on the inside or outside of the ring. Add as many modules as you would like, up to 70W max.

1 SELECT PENDANT BASE

BASE FEATURES



FLUID COPPER RAIL FOR CUSTOM ARRANGEMENT



CLAMPS 2 WAYS INSIDE OR OUTSIDE OF RING

INWARD PENDANT

ROUND



RECTANGULAR



OUTWARD PENDANT

ROUND



MODULE FEATURES



SLIDE AND LOCK

2 SELECT ANY COMBINATION OF MODULES TO ATTACH (UP TO 70W MAX)



10W
Glow Bar



6W
Glow Bar



13W
Adjustable Spot Light



8W
Adjustable Spot Light




10W
Fixed Down Light



M U C C I
C U S T O M I Z A T I O N

ANY COMBINATION UP TO 70W MAX

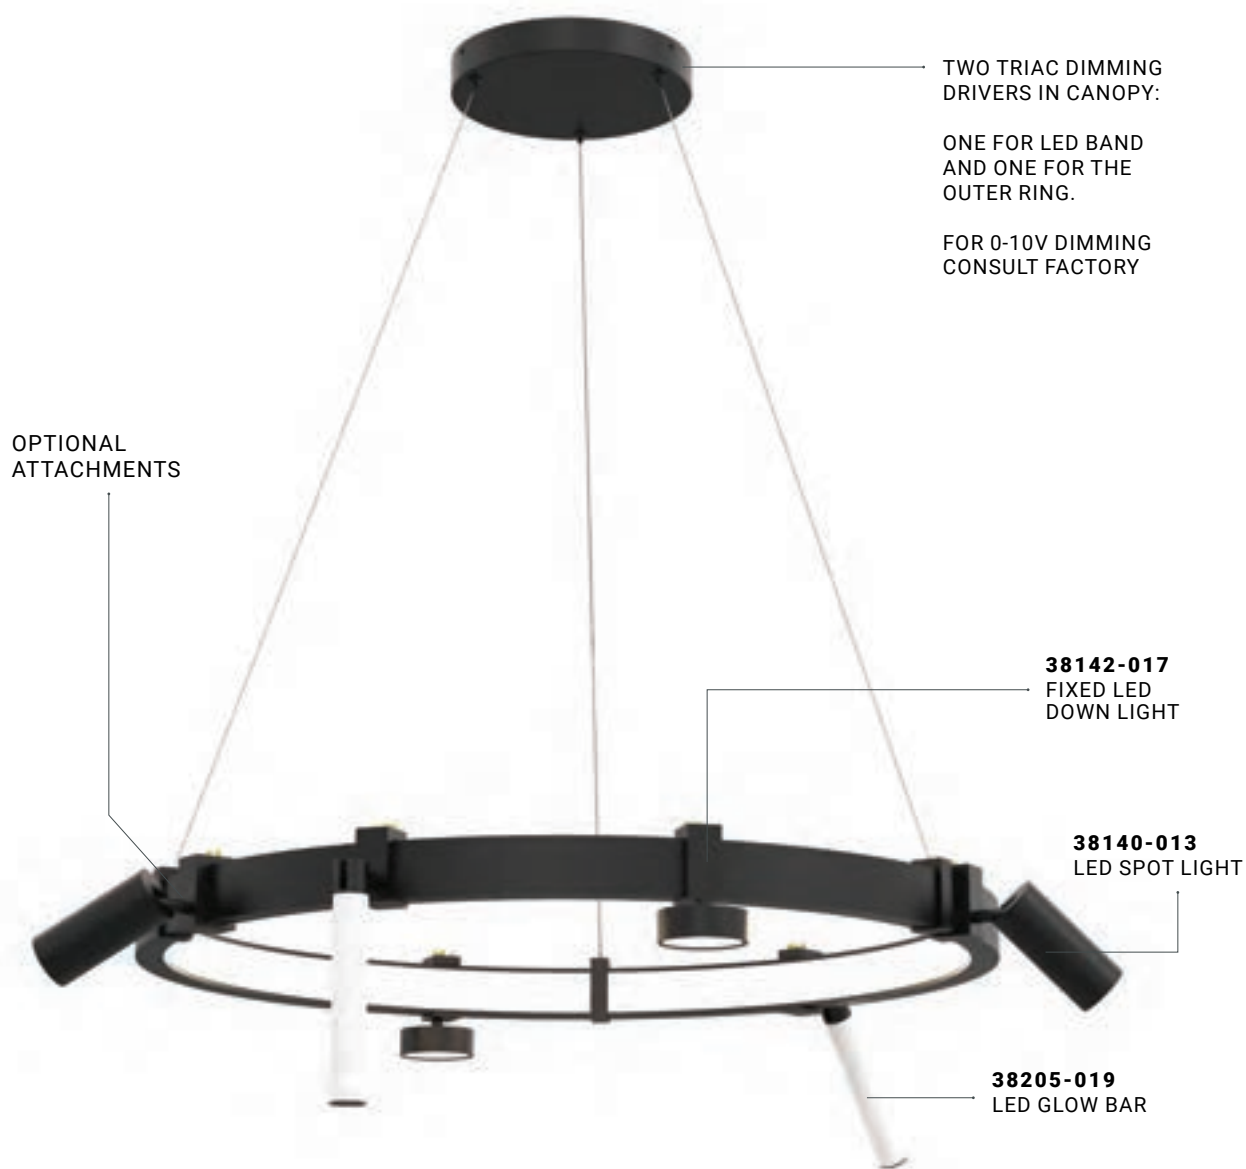


LED ADJUSTABLE SPOT LIGHT

38141-010
13W



Luminous Intensity Distribution Curve






LED GLOW BAR


38205-019

10W

Luminous Intensity Distribution Curve




The Average Illuminance Effective Figure




38204-012

6W

Luminous Intensity Distribution Curve



The Average Illuminance Effective Figure



ARCHITECTURAL PROFILES

Solid extruded aluminum channels available in diameters ranging from 1.5" to 4". These channels house LED drivers and circuit boards that are available in a wide range of ordering options. Aluminum channels are available for recessed, surface, wall or suspended applications. Common in 2', 4' 8' sizes. Aluminum Circuit Board Extrusions can be customized to form long continuous straight runs or custom miter shape patterns.




ARCHITECTURAL PROFILES
S E R I E S

PAGE 241



F38 SERIES

PAGE 247

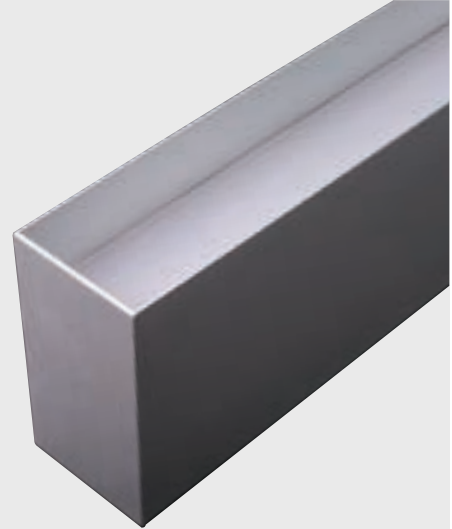

F50 SERIES

PAGE 259



F75 SERIES

PAGE 265




F100 SERIES

INFINITE COLOR POSSIBILITIES

VISIT
WWW.RALCOLOR.COM

QUALITY BUILT

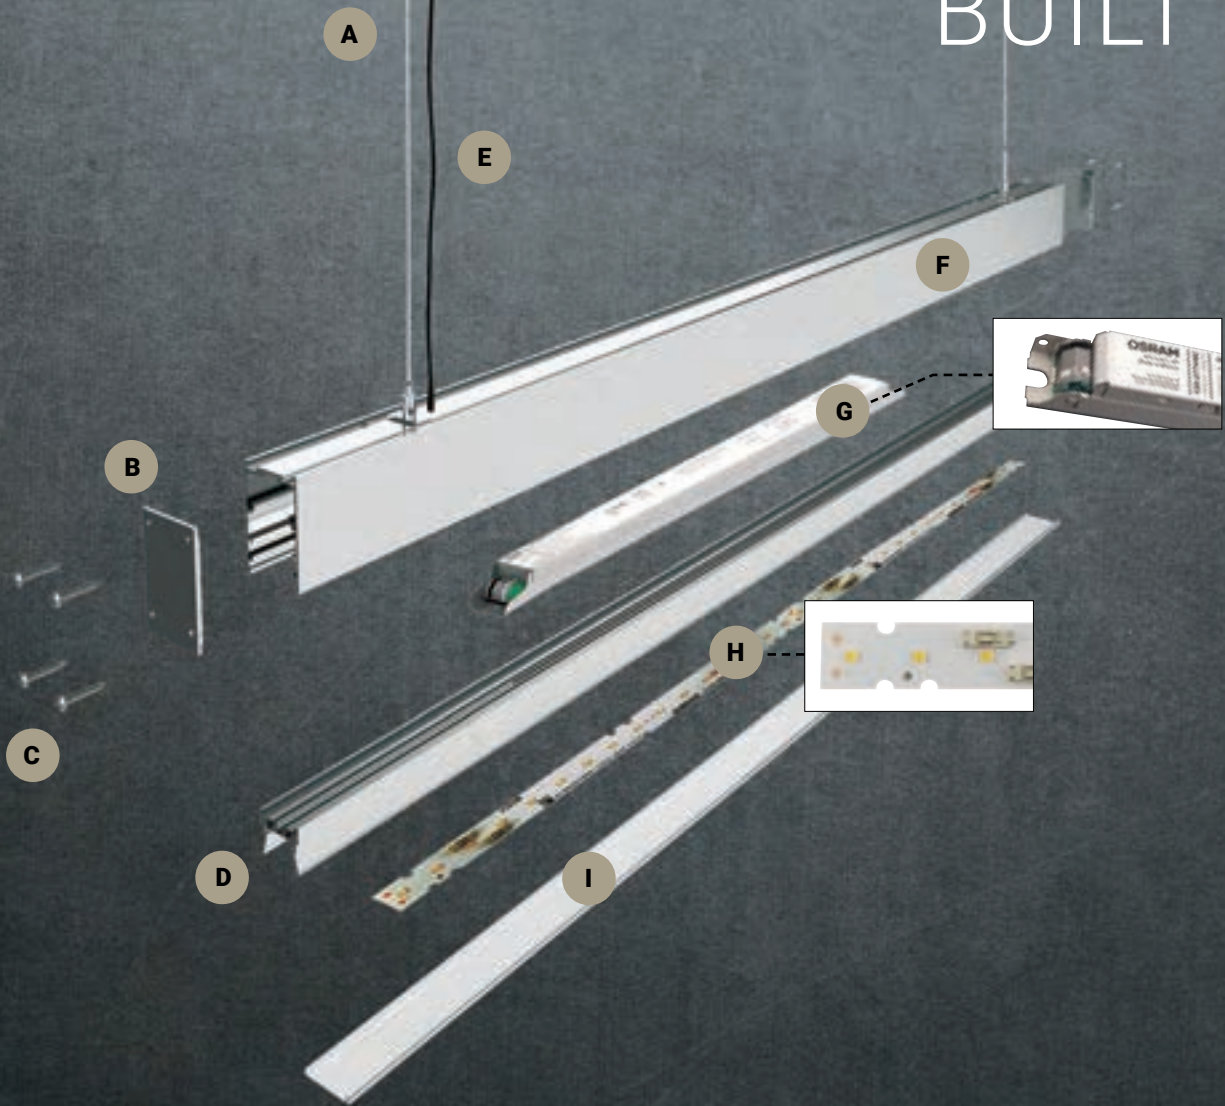

- A** PENDANT (6.5ft. of Wire & Aircraft cable)
- B** END CAP
- C** END CAP SCREWS
- D** EXTRUDED ALUMINUM HEAT SINK
- E** A/C POWER CABLE

- F** ALUMINUM EXTRUDED PROFILE
- G** LED DRIVER
- H** LED BOARD
- I** POLYCARBONATE DIFFUSER

ARCHITECTURAL PROFILES
APPLICATIONS


SURFACE MOUNT



SUSPENSION
Direct or Direct/Indirect



ARCHITECTURAL PROFILES
APPLICATIONS

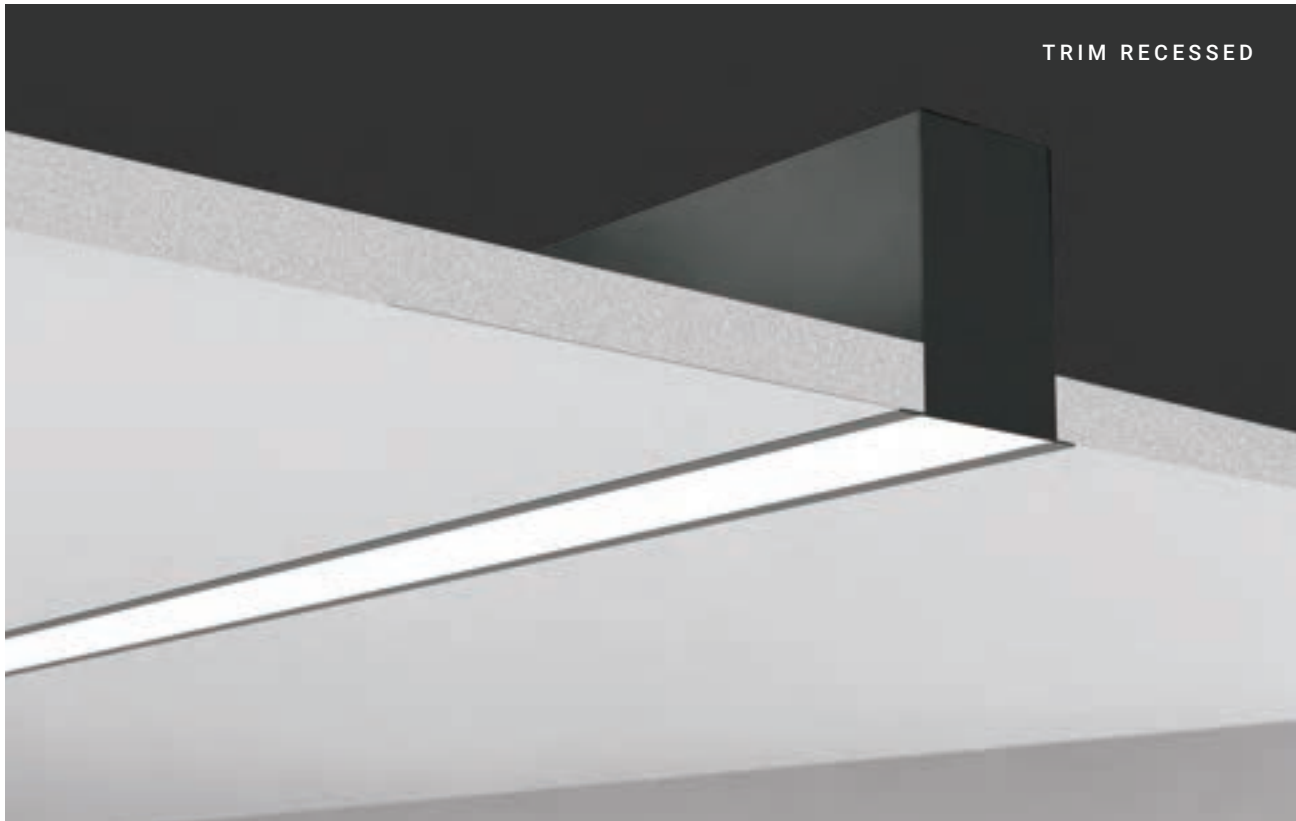

TRIM RECESSED



WALL MOUNT
Direct/Indirect

The F38 series is our narrowest Architectural Profile sporting an aluminum body at a width of 38mm. Ideal for commercial & residential spaces.



ARCHITECTURAL PROFILE SERIES:

F38



F38

F38 DIRECT/INDIRECT WALL MOUNT




MODEL F38	F38-W-X-OP-S-UD
DIMENSIONS	38mm x 115mm
MOUNTING	Wall Mount With Brackets
STYLE	Standard
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	1 - 8'/CR: Continuous Run/PAT: Pattern
LENS	Opal
LIGHT DIRECTION	Up & Downlight
LUMEN PACKAGES	Standard: 7.5W, 813lm/ft. (3500K)/High: 10W, 1162lm/ft. (3500K)
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)
APPROVAL	Damp

ELECTRICAL
APPROVAL


COMPLIANT

WARRANTY

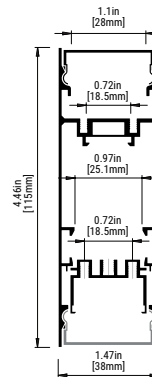

PATTERNS

Common Miter Cut Patterns



Custom Patterns



All corners are miter cut and customizable to any degree.

Contact sales@eurofase.com

ORDERING GUIDE CONFIGURATOR

PROFILE	MOUNTING		LENGTHS (FT.) (**See Lengths Chart below)			LENS	STYLE		LIGHT DIRECTION	
F38	W	WALL MOUNT	1	2	3	OP	OPAL	S	STANDARD	UD UP & DOWNLIGHT
			4	5	6					
			7	8						
			CR	CONTINUOUS RUN						
			PAT	PATTERN						

CCT		LUMEN PACKAGE		VOLTAGE		DIMMING OPTIONS		FINISHES	
27	2700K	ST	STANDARD	UN	UNIVERSAL (120V - 277V)	OS1	0-10V DIMMING	01	BLACK
30	3000K	HI	HIGH	347	347V*	TRI	TRIAC	02	WHITE
35	3500K					TUN	TUNABLE WHITE*	AL	ALUMINUM
40	4000K					LUT	LUTRON*	CC	CUSTOM COLOR
50	5000K					DTW	DIM TO WARM*		SPECIFY RAL#

ORDERING GUIDE EXAMPLE:

Architectural Profiles F38 / Wall Mount / 2 ft. / Opal Lens / Standard Style / Up & Downlight / 3000K / High Lumen / Universal Voltage / TRIAC / Black Finish

CODE: **F38-W-2-OP-S-UD-30-HI-UN-TRI-01**

**LENGTHS CHART

1'	11.5"	2'	22.5"	3'	33.5"	4'	44.5"
5'	55.5"	6'	66.5"	7'	77.5"	8'	88.5"

MAXIMUM 8' PER CONTINUOUS PIECE

F38

F38 DIRECT/INDIRECT SUSPENSION




MODEL F38	F38-SU-X-OP-S-UD
DIMENSIONS	38mm x 115mm
MOUNTING	Suspension Mount, 72" Power Wire + Field Adjustable A/C Cable
STYLE	Standard
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	1 - 8'/CR: Continuous Run/PAT: Pattern
LENS	Opal
LIGHT DIRECTION	Up & Downlight
LUMEN PACKAGES	Standard: 7.5W, 813lm/ft. (3500K)/High: 10W, 1162lm/ft. (3500K)
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)
APPROVAL	Damp

ELECTRICAL
APPROVAL


COMPLIANT

WARRANTY

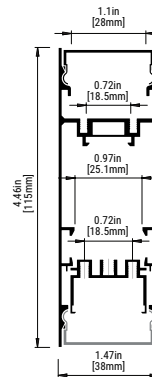

PATTERNS

Common Miter Cut Patterns



Custom Patterns



All corners are miter cut and customizable to any degree.

Contact sales@eurofase.com

ORDERING GUIDE CONFIGURATOR

PROFILE	MOUNTING		LENGTHS (FT.) (**See Lengths Chart below)			LENS		STYLE		LIGHT DIRECTION	
F38	SU	SUSPENSION	1	2	3	OP	OPAL	S	STANDARD	UD	UP & DOWNLIGHT
			4	5	6						
			7	8							
			CR	CONTINUOUS RUN							
			PAT	PATTERN							

CCT		LUMEN PACKAGE		VOLTAGE		DIMMING OPTIONS		FINISHES	
27	2700K	ST	STANDARD	UN	UNIVERSAL (120V - 277V)	OS1	0-10V DIMMING	01	BLACK
30	3000K	HI	HIGH	347	347V*	TRI	TRIAC	02	WHITE
35	3500K					TUN	TUNABLE WHITE*	AL	ALUMINUM
40	4000K					LUT	LUTRON*		CUSTOM COLOR
50	5000K					DTW	DIM TO WARM*	CC	SPECIFY RAL#

**LENGTHS CHART

1'	11.5"	2'	22.5"	3'	33.5"	4'	44.5"
5'	55.5"	6'	66.5"	7'	77.5"	8'	88.5"

MAXIMUM 8' PER CONTINUOUS PIECE

ORDERING GUIDE EXAMPLE:

Architectural Profiles F38 / Suspension / 5 ft. / Opal Lens / Standard Style / Up & Downlight / 4000K / Standard Lumen / Universal Voltage / TRIAC / White Finish
CODE: **F38-SU-5-OP-S-UD-40-ST-UN-TRI-02**

F38

F38 STANDARD SUSPENSION



MODEL F38	F38-SU-X-OP-S-DN
DIMENSIONS	38mm x 75mm
MOUNTING	Suspension Mount, 72" Power Wire + Field Adjustable A/C Cable
STYLE	Standard
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	1 - 8/CR: Continuous Run/PAT: Pattern
LENS	Opal/Opal Dropped
LIGHT DIRECTION	Downlight
LUMEN PACKAGES	Standard: 7.5W, 813lm/ft. (3500K)/High: 10W, 1162lm/ft. (3500K)
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)
APPROVAL	Damp

ELECTRICAL
APPROVAL

COMPLIANT

WARRANTY



PATTERNS


Common Miter Cut Patterns

Square	Rectangular	U-Shape	L-Shape
X = 23" min. Y = 23" min.	X = 23" min. Y = 23" min.	X = 23" min. Y = 23" min. Z = 23" min.	X = 23" min. Y = 23" min.

Custom Patterns



All corners are miter cut and customizable to any degree.

Contact sales@eurofase.com

ORDERING GUIDE CONFIGURATOR

PROFILE	MOUNTING		LENGTHS (FT.) (**See Lengths Chart below)			LENS		STYLE		LIGHT DIRECTION	
F38	SU	SUSPENSION	1	2	3	OP	OPAL	S	STANDARD	DN	DOWNLIGHT
			4	5	6	OD	OPAL DROPPED				
			7	8							
			CR	CONTINUOUS RUN							
			PAT	PATTERN							

CCT		LUMEN PACKAGE		VOLTAGE		DIMMING OPTIONS		FINISHES	
27	2700K	ST	STANDARD	UN	UNIVERSAL (120V - 277V)	OS1	0-10V DIMMING	01	BLACK
30	3000K	HI	HIGH	347	347V*	TRI	TRIAC	02	WHITE
35	3500K					TUN	TUNABLE WHITE*	AL	ALUMINUM
40	4000K					LUT	LUTRON*		CUSTOM COLOR
50	5000K					DTW	DIM TO WARM*	CC	SPECIFY RAL#

ORDERING GUIDE EXAMPLE:

Architectural Profiles F38 / Suspension / 8 ft. / Opal Dropped / Standard Style / Downlight / 2700K / Standard / Universal Voltage / Lutron / Aluminum Finish

CODE: F38-SU-8-OD-S-DN-27-ST-UN-LUT-03

**LENGTHS CHART

1'	11.5"	2'	22.5"	3'	33.5"	4'	44.5"
5'	55.5"	6'	66.5"	7'	77.5"	8'	88.5"

MAXIMUM 8' PER CONTINUOUS PIECE

F38

F38 RECESSED



MODEL F38	F38-R-X-OP-S-DN
DIMENSIONS	38mm x 75mm
MOUNTING	Recessed Mount
STYLE	Standard
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	1 - 8'/CR: Continuous Run/PAT: Pattern
LENS	Opal
LIGHT DIRECTION	Up & Downlight
LUMEN PACKAGES	Standard: 7.5W, 813lm/ft. (3500K)/High: 10W, 1162lm/ft. (3500K)
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)
APPROVAL	Damp

ELECTRICAL
APPROVALTITLE
24

JAB

COMPLIANT

WARRANTY



PATTERNS


Common Miter Cut Patterns

Square	Rectangular	U-Shape	L-Shape
X = 23" min. Y = 23" min.		X = 23" min. Y = 23" min. Z = 23" min.	X = 23" min. Y = 23" min.

Custom Patterns



All corners are miter cut and customizable to any degree.

Contact sales@eurofase.com

ORDERING GUIDE CONFIGURATOR

PROFILE	MOUNTING		LENGTHS (FT.) (**See Lengths Chart below)			LENS		STYLE		LIGHT DIRECTION	
F38	R	RECESSED	1	2	3	OP	OPAL	S	STANDARD	DN	DOWNLIGHT
			4	5	6						
			7	8							
			CR	CONTINUOUS RUN							
			PAT	PATTERN							

CCT		LUMEN PACKAGE		VOLTAGE		DIMMING OPTIONS		FINISHES	
27	2700K	ST	STANDARD	UN	UNIVERSAL (120V - 277V)	OS1	0-10V DIMMING	01	BLACK
30	3000K	HI	HIGH	347	347V*	TRI	TRIAC	02	WHITE
35	3500K					TUN	TUNABLE WHITE*	AL	ALUMINUM
40	4000K					LUT	LUTRON*		CUSTOM COLOR
50	5000K					DTW	DIM TO WARM*	CC	SPECIFY RAL#

**LENGTHS CHART

1'	11.5"	2'	22.5"	3'	33.5"	4'	44.5"
5'	55.5"	6'	66.5"	7'	77.5"	8'	88.5"


MAXIMUM 8' PER CONTINUOUS PIECE

ORDERING GUIDE EXAMPLE:

Architectural Profiles F38 / Recessed / 3 ft. / Opal Lens / Standard Style /
Downlight / 3000K / High Lumen / Universal Voltage / 0-10V Dimming / Black Finish

CODE: **F38-R-3-OP-S-DN-30-HI-UN-OS1-01**

The F50 series is our narrow Architectural Profile
sporting an aluminum body at 50mm wide.
Ideal for commercial & residential spaces.

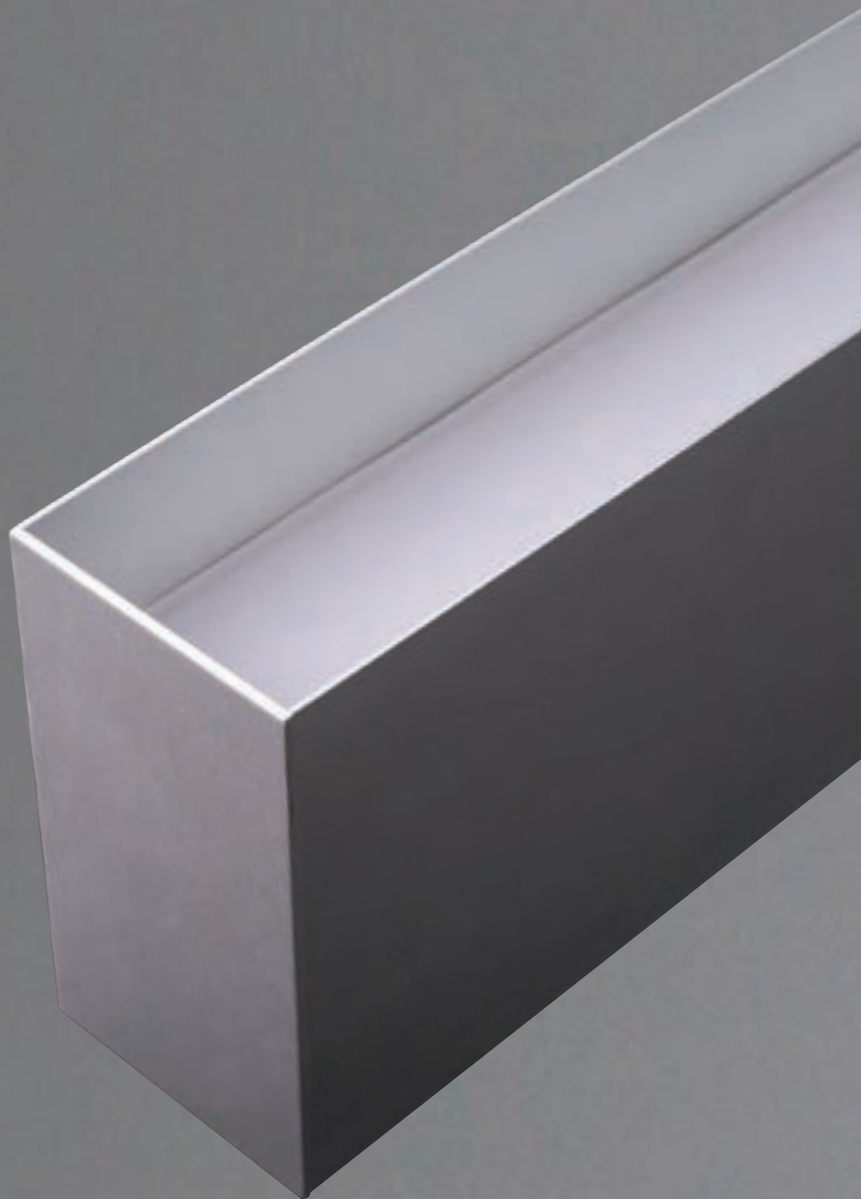

ARCHITECTURAL PROFILE SERIES:

F50



F50

F50 STANDARD SURFACE MOUNT




MODEL F50	F50-S-X-OP-S-DN
DIMENSIONS	50mm x 75mm
MOUNTING	Surface Mount
STYLE	Standard
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	1 - 8' / CR: Continuous Run / PAT: Pattern
LENS	Opal/Opal Dropped
LIGHT DIRECTION	Downlight
LUMEN PACKAGES	Standard: 7.5W, 813lm/ft. (3500K) / High: 10W, 1162lm/ft. (3500K)
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)
APPROVAL	Damp

ELECTRICAL
APPROVAL


COMPLIANT

WARRANTY

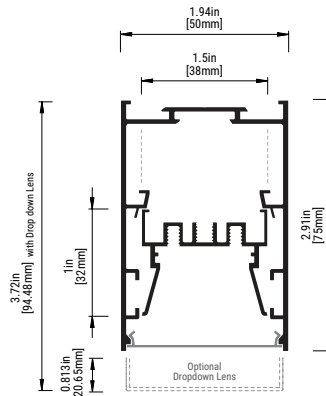

PATTERNS

Common Miter Cut Patterns



Custom Patterns



All corners are miter cut and customizable to any degree.

Contact sales@eurofase.com

ORDERING GUIDE CONFIGURATOR

PROFILE	MOUNTING		LENGTHS (FT.) (*See Lengths Chart below)			LENS		STYLE		LIGHT DIRECTION	
F50	S	SURFACE MOUNT	1	2	3	OP	OPAL	S	STANDARD	DN	DOWNLIGHT
			4	5	6	OD	OPAL DROPPED				
			7	8							
			CR	CONTINUOUS RUN							
			PAT	PATTERN							

CCT		LUMEN PACKAGE		VOLTAGE		DIMMING OPTIONS		FINISHES	
27	2700K	ST	STANDARD	UN	UNIVERSAL (120V - 277V)	OS1	0-10V DIMMING	01	BLACK
30	3000K	HI	HIGH	347	347V*	TRI	TRIAC	02	WHITE
35	3500K					TUN	TUNABLE WHITE*	AL	ALUMINUM
40	4000K					LUT	LUTRON*	CC	CUSTOM COLOR
50	5000K					DTW	DIM TO WARM*		SPECIFY RAL#

ORDERING GUIDE EXAMPLE:

Architectural Profiles F50 / Surface Mount / 1 ft. / Opal Dropped / Standard Style / Downlight / 4000K / High / Universal Voltage / 0-10V Dimming / Black Finish

CODE: **F50-S-1-OP-S-DN-40-HI-UN-OS1-01**

**LENGTHS CHART

1'	11.5"	2'	22.5"	3'	33.5"	4'	44.5"
5'	55.5"	6'	66.5"	7'	77.5"	8'	88.5"

MAXIMUM 8' PER CONTINUOUS PIECE

F50

F50 STANDARD SUSPENSION




MODEL F50	F50-SU-X-OP-S-DN
DIMENSIONS	50mm x 75mm
MOUNTING	Suspension Mount, 72" Power Wire + Field Adjustable A/C Cable
STYLE	Standard
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	1 - 8' / CR: Continuous Run / PAT: Pattern
LENS	Opal/Opal Dropped
LIGHT DIRECTION	Downlight
LUMEN PACKAGES	Standard: 7.5W, 813lm/ft. (3500K) / High: 10W, 1162lm/ft. (3500K)
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)
APPROVAL	Damp

ELECTRICAL
APPROVAL


COMPLIANT

WARRANTY

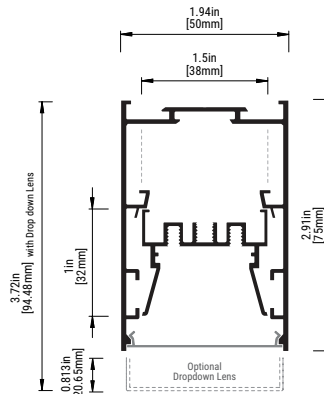

PATTERNS

Common Miter Cut Patterns



Custom Patterns



All corners are miter cut and customizable to any degree.

Contact sales@eurofase.com

ORDERING GUIDE CONFIGURATOR

PROFILE	MOUNTING		LENGTHS (FT.) (*See Lengths Chart below)			LENS		STYLE		LIGHT DIRECTION	
F50	SU	SUSPENSION	1	2	3	OP	OPAL	S	STANDARD	DN	DOWNLIGHT
			4	5	6	OD	OPAL DROPPED				
			7	8							
			CR	CONTINUOUS RUN							
			PAT	PATTERN							

CCT		LUMEN PACKAGE		VOLTAGE		DIMMING OPTIONS		FINISHES	
27	2700K	ST	STANDARD	UN	UNIVERSAL (120V - 277V)	OS1	0-10V DIMMING	01	BLACK
30	3000K	HI	HIGH	347	347V*	TRI	TRIAC	02	WHITE
35	3500K					TUN	TUNABLE WHITE*	AL	ALUMINUM
40	4000K					LUT	LUTRON*	CC	CUSTOM COLOR
50	5000K					DTW	DIM TO WARM*		SPECIFY RAL#

**LENGTHS CHART

1'	11.5"	2'	22.5"	3'	33.5"	4'	44.5"
5'	55.5"	6'	66.5"	7'	77.5"	8'	88.5"

MAXIMUM 8' PER CONTINUOUS PIECE

ORDERING GUIDE EXAMPLE:

Architectural Profiles F50 / Suspension / 3 ft. / Opal Lens / Standard Style / Downlight / 3500K / Standard / Universal Voltage / TRIAC / White Finish

CODE: **F50-SU-3-OP-S-DN-35-ST-UN-TRI-02**

F50

F50 REGRESSED ARCH SUSPENSION




MODEL F50	F50-SU-X-OP-RA-DN
DIMENSIONS	50mm x 75mm
MOUNTING	Suspension Mount, 72" Power Wire + Field Adjustable A/C Cable
STYLE	Regressed Arch
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	1 - 8' / CR: Continuous Run / PAT: Pattern
LENS	Opal
LIGHT DIRECTION	Downlight
LUMEN PACKAGES	Standard: 7.5W, 813lm/ft. (3500K) / High: 10W, 1162lm/ft. (3500K)
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)
APPROVAL	Damp

ELECTRICAL
APPROVAL


COMPLIANT

WARRANTY

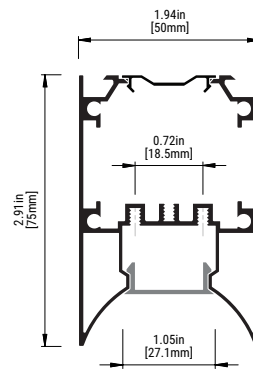

PATTERNS

Common Miter Cut Patterns



Custom Patterns



All corners are miter cut and customizable to any degree.

Contact sales@eurofase.com

ORDERING GUIDE CONFIGURATOR

PROFILE	MOUNTING		LENGTHS (FT.) (**See Lengths Chart below)			LENS		STYLE		LIGHT DIRECTION	
F50	SU	SUSPENSION	1	2	3	OP	OPAL	RA	REGRESSED ARCH	DN	DOWNLIGHT
			4	5	6						
			7	8							
			CR	CONTINUOUS RUN							
			PAT	PATTERN							

CCT		LUMEN PACKAGE		VOLTAGE		DIMMING OPTIONS		FINISHES	
27	2700K	ST	STANDARD	UN	UNIVERSAL (120V - 277V)	OS1	0-10V DIMMING	01	BLACK
30	3000K	HI	HIGH	347	347V*	TRI	TRIAC	02	WHITE
35	3500K					TUN	TUNABLE WHITE*	AL	ALUMINUM
40	4000K					LUT	LUTRON*		CUSTOM COLOR
50	5000K					DTW	DIM TO WARM*	CC	SPECIFY RAL#

ORDERING GUIDE EXAMPLE:

Architectural Profiles F50 / Suspension / 5 ft. / Opal Lens / Regressed Arch Style / Downlight / 3500K / High / Universal Voltage / TRIAC Dimming / Custom Color RAL 6033: Mint Turquoise

CODE: F50-SU-5-OP-RA-DN-35-HI-UN-TRI-CC-RAL 6033

**LENGTHS CHART

1'	11.5"	2'	22.5"	3'	33.5"	4'	44.5"
5'	55.5"	6'	66.5"	7'	77.5"	8'	88.5"

MAXIMUM 8' PER CONTINUOUS PIECE



F50

F50 DIRECT/INDIRECT SUSPENSION




MODEL F50	F50-SU-X-OP-S-UD
DIMENSIONS	50mm x 120mm
MOUNTING	Suspension Mount, 72" Power Wire + Field Adjustable A/C Cable
STYLE	Standard
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	1 - 8' / CR : Continuous Run / PAT : Pattern
LENS	Opal
LIGHT DIRECTION	Up & Downlight
LUMEN PACKAGES	Standard : 7.5W, 813lm/ft. (3500K) / High : 10W, 1162lm/ft. (3500K)
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)
APPROVAL	Damp

ELECTRICAL
APPROVAL

COMPLIANT

WARRANTY

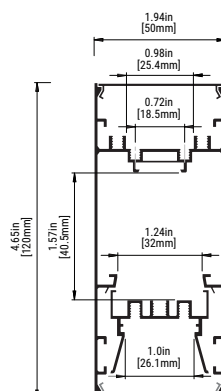

PATTERNS

Common Miter Cut Patterns

Square	Rectangular	U-Shape	L-Shape
X = 23" min. Y = 23" min.	X = 23" min. Y = 23" min.	X = 23" min. Y = 23" min. Z = 23" min.	X = 23" min. Y = 23" min.

Custom Patterns



All corners are miter cut and customizable to any degree.

Contact sales@eurofase.com

ORDERING GUIDE CONFIGURATOR

PROFILE	MOUNTING		LENGTHS (FT.) (**See Lengths Chart below)			LENS		STYLE		LIGHT DIRECTION	
F50	SU	SUSPENSION	1	2	3	OP	OPAL	S	STANDARD	UD	UP & DOWNLIGHT
			4	5	6						
			7	8							
			CR	CONTINUOUS RUN							
			PAT	PATTERN							

CCT		LUMEN PACKAGE		VOLTAGE		DIMMING OPTIONS		FINISHES	
27	2700K	ST	STANDARD	UN	UNIVERSAL (120V - 277V)	OS1	0-10V DIMMING	01	BLACK
30	3000K	HI	HIGH	347	347V*	TRI	TRIAC	02	WHITE
35	3500K					TUN	TUNABLE WHITE*	AL	ALUMINUM
40	4000K					LUT	LUTRON*		CUSTOM COLOR
50	5000K					DTW	DIM TO WARM*	CC	SPECIFY RAL#

ORDERING GUIDE EXAMPLE:

Architectural Profiles F50 / Suspension / 7 ft. / Opal Lens / Standard Style / Up & Downlight / 4000K / High / Universal Voltage / 0-10V Dimming / Black Finish

CODE: **F50-SU-7-OP-S-UD-40-HI-UN-OS1-01**

**LENGTHS CHART

1'	11.5"	2'	22.5"	3'	33.5"	4'	44.5"
5'	55.5"	6'	66.5"	7'	77.5"	8'	88.5"

MAXIMUM 8' PER CONTINUOUS PIECE

F50

F50 DIRECT/INDIRECT WALL MOUNT




MODEL F50	F50-W-X-OP-S-UD
DIMENSIONS	50mm x 120mm
MOUNTING	Wall Mount With Brackets
STYLE	Standard
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	1 - 8'/CR: Continuous Run/PAT: Pattern
LENS	Opal
LIGHT DIRECTION	Up & Downlight
LUMEN PACKAGES	Standard: 7.5W, 813lm/ft. (3500K)/High: 10W, 1162lm/ft. (3500K)
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)
APPROVAL	Damp

ELECTRICAL
APPROVAL

COMPLIANT

WARRANTY

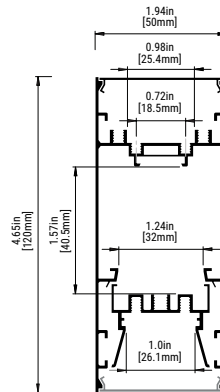

PATTERNS

Common Miter Cut Patterns

Square	Rectangular	U-Shape	L-Shape
X = 23" min. Y = 23" min.	X = 23" min. Y = 23" min. Z = 23" min.	X = 23" min. Y = 23" min. Z = 23" min.	X = 23" min. Y = 23" min.

Custom Patterns



All corners are miter cut and customizable to any degree.

Contact sales@eurofase.com

ORDERING GUIDE CONFIGURATOR

PROFILE	MOUNTING		LENGTHS (FT.) (*See Lengths Chart below)			LENS		STYLE		LIGHT DIRECTION	
F50	W	WALL MOUNT	1	2	3	OP	OPAL	S	STANDARD	UD	UP & DOWNLIGHT
			4	5	6						
			7	8							
			CR	CONTINUOUS RUN							
			PAT	PATTERN							

CCT		LUMEN PACKAGE		VOLTAGE		DIMMING OPTIONS		FINISHES	
27	2700K	ST	STANDARD	UN	UNIVERSAL (120V - 277V)	OS1	0-10V DIMMING	01	BLACK
30	3000K	HI	HIGH	347	347V*	TRI	TRIAC	02	WHITE
35	3500K					TUN	TUNABLE WHITE*	AL	ALUMINUM
40	4000K					LUT	LUTRON*	CC	CUSTOM COLOR
50	5000K					DTW	DIM TO WARM*		SPECIFY RAL#

**LENGTHS CHART

1'	11.5"	2'	22.5"	3'	33.5"	4'	44.5"
5'	55.5"	6'	66.5"	7'	77.5"	8'	88.5"

MAXIMUM 8' PER CONTINUOUS PIECE

ORDERING GUIDE EXAMPLE:

Architectural Profiles F50 / Wall Mount / 3 ft. / Opal Lens / Standard Style / Up & Downlight / 5000K / High / Universal Voltage / TRIAC / White Finish

CODE: **F50-W-3-OP-S-UD-50-HI-UN-TRI-02**

F50

F50 RECESSED



MODEL F50	F50-R-X-OP-S-DN
DIMENSION	50mm x 75mm
MOUNTING	Recessed Mount
STYLE	Standard
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	1 - 8' / CR: Continuous Run / PAT: Pattern
LENS	Opal
LIGHT DIRECTION	Downlight
LUMEN PACKAGES	Standard: 7.5W, 813lm/ft. (3500K) / High: 10W, 1162lm/ft. (3500K)
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)
APPROVAL	Damp

ELECTRICAL
APPROVAL

COMPLIANT

WARRANTY



PATTERNS


Common Miter Cut Patterns

Square	Rectangular	U-Shape	L-Shape
X = 23" min. Y = 23" min.		X = 23" min. Y = 23" min. Z = 23" min.	X = 23" min. Y = 23" min.

Custom Patterns



All corners are miter cut and customizable to any degree.

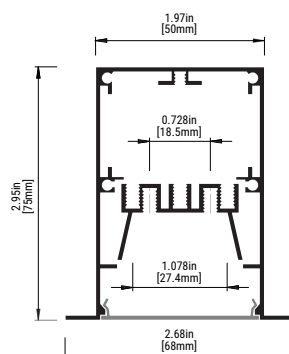Contact sales@eurofase.com

ORDERING GUIDE CONFIGURATOR

PROFILE	MOUNTING		LENGTHS (FT.) (**See Lengths Chart below)			LENS	STYLE		LIGHT DIRECTION	
F50	R	RECESSED	1	2	3	OP	OPAL	S	STANDARD	DN DOWNLIGHT
			4	5	6					
			7	8						
			CR	CONTINUOUS RUN						
			PAT	PATTERN						

CCT		LUMEN PACKAGE		VOLTAGE		DIMMING OPTIONS		FINISHES	
27	2700K	ST	STANDARD	UN	UNIVERSAL (120V - 277V)	OS1	0-10V DIMMING	01	BLACK
30	3000K	HI	HIGH	347	347V*	TRI	TRIAC	02	WHITE
35	3500K					TUN	TUNABLE WHITE*	AL	ALUMINUM
40	4000K					LUT	LUTRON*	CC	CUSTOM COLOR
50	5000K					DTW	DIM TO WARM*		SPECIFY RAL#

ORDERING GUIDE EXAMPLE:

Architectural Profiles F50 / Recessed / 6 ft. / Opal Lens / Standard Style / Downlight / 3000K / Standard / Universal Voltage / TRIAC Dimming / Aluminum Finish

CODE: F50-R-6-OP-S-DN-30-ST-UN-TRI-AL

**LENGTHS CHART

1'	11.5"	2'	22.5"	3'	33.5"	4'	44.5"
5'	55.5"	6'	66.5"	7'	77.5"	8'	88.5"

MAXIMUM 8' PER CONTINUOUS PIECE

F50

F50 ROUND SUSPENSION




MODEL F50	F50-SU-X-OP-RA-DN
DIMENSION	50mm x 75mm
MOUNTING	Suspension Mount, 72" Power Wire + Field Adjustable A/C Cable
STYLE	Round
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	1 - 8' CR: Continuous Run/ PAT: Pattern
LENS	Opal
LIGHT DIRECTION	Downlight
LUMEN PACKAGES	Standard: 7.5W, 813lm/ft. (3500K)/ High: 10W, 1162lm/ft. (3500K)
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)
APPROVAL	Damp

ELECTRICAL
APPROVALTITLE
24

JAB

COMPLIANT

WARRANTY

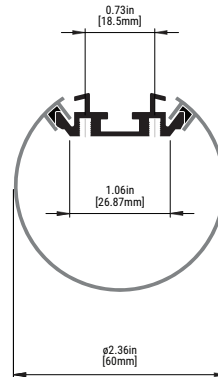

ORDERING GUIDE CONFIGURATOR

PROFILE	MOUNTING		LENGTHS (FT.) (**See Lengths Chart below)			LENS		STYLE		LIGHT DIRECTION	
F50	SU	SUSPENSION	1	2	3	OP	OPAL	RND	ROUND	DN	DOWNLIGHT
			4	5	6						
			7	8							
			CR	CONTINUOUS RUN							
			PAT	PATTERN							

CCT		LUMEN PACKAGE		VOLTAGE		DIMMING OPTIONS		FINISHES	
27	2700K	ST	STANDARD	UN	UNIVERSAL (120V - 277V)	OS1	0-10V DIMMING	01	BLACK
30	3000K	HI	HIGH	347	347V*	TRI	TRIAC	02	WHITE
35	3500K					TUN	TUNABLE WHITE*	AL	ALUMINUM
40	4000K					LUT	LUTRON*	CC	CUSTOM COLOR
50	5000K					DTW	DIM TO WARM*		SPECIFY RAL#

**LENGTHS CHART

1'	11.5"	2'	22.5"	3'	33.5"	4'	44.5"
5'	55.5"	6'	66.5"	7'	77.5"	8'	88.5"

MAXIMUM 8' PER CONTINUOUS PIECE

ORDERING GUIDE EXAMPLE:

Architectural Profiles F50 / Suspension / 3 ft. / Opal Lens / Round Style / Downlight / 4000K / High / Universal Voltage / TRIAC / White Finish

CODE: F50-SU-3-OP-RND-DN-40-HI-UN-TRI-02

The F75 series is our wide Architectural Profile sporting an aluminum body at 75mm wide. Ideal for commercial & residential spaces.



ARCHITECTURAL PROFILE SERIES:

F75



F75

F75 STANDARD SUSPENSION



MODEL F75	F75-SU-X-OP-S-DN
DIMENSIONS	75mm x 75mm
MOUNTING	Suspension Mount, 72" Power Wire + Field Adjustable A/C Cable
STYLE	Standard
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	1 - 8' / CR : Continuous Run / PAT : Pattern
LENS	Opal/Opal Dropped
LIGHT DIRECTION	Downlight
LUMEN PACKAGES	Standard : 7.5W, 813lm/ft. (3500K) / High : 10W, 1162lm/ft. (3500K)
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)
APPROVAL	Damp

ELECTRICAL
APPROVAL


COMPLIANT

WARRANTY



PATTERNS


Common Miter Cut Patterns



Custom Patterns



All corners are miter cut and customizable to any degree.

Contact sales@eurofase.com

ORDERING GUIDE CONFIGURATOR

PROFILE	MOUNTING		LENGTHS (FT.) (**See Lengths Chart below)			LENS		STYLE		LIGHT DIRECTION	
F75	SU	SUSPENSION	1	2	3	OP	OPAL	S	STANDARD	DN	DOWNLIGHT
			4	5	6	OD	OPAL DROPPED				
			7	8							
			CR	CONTINUOUS RUN							
			PAT	PATTERN							

CCT		LUMEN PACKAGE		VOLTAGE		DIMMING OPTIONS		FINISHES	
27	2700K	ST	STANDARD	UN	UNIVERSAL (120V - 277V)	OS1	0-10V DIMMING	01	BLACK
30	3000K	HI	HIGH	347	347V*	TRI	TRIAC	02	WHITE
35	3500K					TUN	TUNABLE WHITE*	AL	ALUMINUM
40	4000K					LUT	LUTRON*		CUSTOM COLOR
50	5000K					DTW	DIM TO WARM*	CC	SPECIFY RAL#

ORDERING GUIDE EXAMPLE:

Architectural Profiles F75 / Suspension / 2 ft. / Opal Dropped / Standard Style / Downlight / 3000K / High / Universal Voltage / TRIAC Dimming / Black Finish

CODE: **F50-SU-2-OD-S-DN-30-HI-UN-TRI-01**

**LENGTHS CHART

1'	11.5"	2'	22.5"	3'	33.5"	4'	44.5"
5'	55.5"	6'	66.5"	7'	77.5"	8'	88.5"

MAXIMUM 8' PER CONTINUOUS PIECE

F75

F75 STANDARD SURFACE MOUNT



MODEL F75	F75-S-X-OP-S-DN
DIMENSION	75mm x 75mm
MOUNTING	Surface Mount
STYLE	Standard
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	1 - 8'/CR: Continuous Run/PAT: Pattern
LENS	Opal/Opal Dropped
LIGHT DIRECTION	Downlight
LUMEN PACKAGES	Standard: 7.5W, 813lm/ft. (3500K)/High: 10W, 1162lm/ft. (3500K)
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)
APPROVAL	Damp

ELECTRICAL
APPROVAL

COMPLIANT

WARRANTY



PATTERNS


Common Miter Cut Patterns

Square	Rectangular	U-Shape	L-Shape
X = 23" min. Y = 23" min.		X = 23" min. Y = 23" min. Z = 23" min.	X = 23" min. Y = 23" min.

Custom Patterns



All corners are miter cut and customizable to any degree.

Contact sales@eurofase.com

ORDERING GUIDE CONFIGURATOR

PROFILE	MOUNTING	LENGTHS (FT.) (**See Lengths Chart below)			LENS	STYLE	LIGHT DIRECTION	
F75	S SURFACE MOUNT	1	2	3	OP OPAL	S STANDARD	DN	DOWNLIGHT
		4	5	6	OD OPAL DROPPED			
		7	8					
		CR	CONTINUOUS RUN					
		PAT	PATTERN					

CCT	LUMEN PACKAGE	VOLTAGE	DIMMING OPTIONS	FINISHES
27 2700K	ST STANDARD	UN UNIVERSAL (120V - 277V)	OS1 0-10V DIMMING	01 BLACK
30 3000K	HI HIGH	347 347V*	TRI TRIAC	02 WHITE
35 3500K			TUN TUNABLE WHITE*	AL ALUMINUM
40 4000K			LUT LUTRON*	CUSTOM COLOR
50 5000K			DTW DIM TO WARM*	CC SPECIFY RAL#

**LENGTHS CHART

1'	11.5"	2'	22.5"	3'	33.5"	4'	44.5"
5'	55.5"	6'	66.5"	7'	77.5"	8'	88.5"

MAXIMUM 8' PER CONTINUOUS PIECE

ORDERING GUIDE EXAMPLE:

Architectural Profiles F75 / Surface Mount / 2 ft. / Opal Lens / Standard Style / Downlight / 3000K / High / Universal Voltage / TRIAC Dimming / Aluminum Finish

CODE: F50-S-2-OP-S-DN-30-HI-UN-TRI-AL

F75

F75 RECESSED



MODEL F75	F75-R-X-OP-S-DN
DIMENSIONS	75mm x 75mm
MOUNTING	Recessed Mount
STYLE	Standard
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	1 - 8'/CR: Continuous Run/PAT: Pattern
LENS	Opal
LIGHT DIRECTION	Downlight
LUMEN PACKAGES	Standard: 7.5W, 813lm/ft. (3500K)/High: 10W, 1162lm/ft. (3500K)
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)
APPROVAL	Damp

ELECTRICAL
APPROVAL

COMPLIANT

WARRANTY



PATTERNS


Common Miter Cut Patterns

Square	Rectangular	U-Shape	L-Shape
X = 23" min. Y = 23" min.	X = 23" min. Y = 23" min. Z = 23" min.	X = 23" min. Y = 23" min. Z = 23" min.	X = 23" min. Y = 23" min.

Custom Patterns



All corners are miter cut and customizable to any degree.

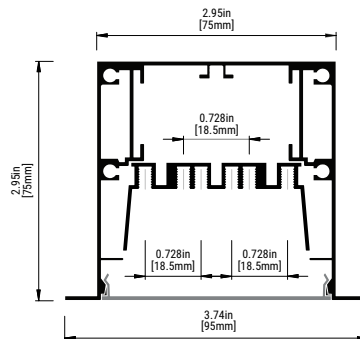Contact sales@eurofase.com

ORDERING GUIDE CONFIGURATOR

PROFILE	MOUNTING	LENGTHS (FT.) (**See Lengths Chart below)	LENS	STYLE	LIGHT DIRECTION
F75	R RECESSED	1 2 3 4 5 6 7 8 CR CONTINUOUS RUN PAT PATTERN	OP OPAL	S STANDARD	DN DOWNLIGHT

CCT	LUMEN PACKAGE	VOLTAGE	DIMMING OPTIONS	FINISHES
27 2700K	ST STANDARD	UN UNIVERSAL (120V - 277V)	OS1 0-10V DIMMING	01 BLACK
30 3000K	HI HIGH	347 347V*	TRI TRIAC	02 WHITE
35 3500K			TUN TUNABLE WHITE*	AL ALUMINUM
40 4000K			LUT LUTRON*	CUSTOM COLOR
50 5000K			DTW DIM TO WARM*	CC SPECIFY RAL#

ORDERING GUIDE EXAMPLE:

Architectural Profiles F75 / Recessed / 5 ft. / Opal Lens / Standard Style /
Downlight / 4000K / High / Universal Voltage / 0-10V Dimming / White Finish

CODE: F75-R-5-OP-S-DN-40-HI-UN-OS1-02

**LENGTHS CHART

1'	11.5"	2'	22.5"	3'	33.5"	4'	44.5"
5'	55.5"	6'	66.5"	7'	77.5"	8'	88.5"

MAXIMUM 8' PER CONTINUOUS PIECE



The F100 series is our widest Architectural Profile sporting an aluminum body at a width of 100mm. Ideal for commercial & residential spaces.



ARCHITECTURAL PROFILE SERIES:

F100



F100

F100 STANDARD SUSPENSION



MODEL F100	F100-SU-X-OP-S-DN
DIMENSIONS	100mm x 75mm
MOUNTING	Suspension Mount, 72" Power Wire + Field Adjustable A/C Cable
STYLE	Standard
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	1 - 8' / CR: Continuous Run / PAT: Pattern
LENS	Opal
LIGHT DIRECTION	Downlight
LUMEN PACKAGES	Standard: 7.5W, 813lm/ft. (3500K) / High: 10W, 1162lm/ft. (3500K)
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)
APPROVAL	Damp

ELECTRICAL
APPROVAL

COMPLIANT

WARRANTY



PATTERNS


Common Miter Cut Patterns

Square	Rectangular	U-Shape	L-Shape
X = 23" min. Y = 23" min.	X = 23" min. Y = 23" min.	X = 23" min. Y = 23" min. Z = 23" min.	X = 23" min. Y = 23" min.

Custom Patterns



All corners are miter cut and customizable to any degree.

Contact sales@eurofase.com

ORDERING GUIDE CONFIGURATOR

PROFILE	MOUNTING		LENGTHS (FT.) (*See Lengths Chart below)			LENS		STYLE		LIGHT DIRECTION	
F100	SU	SUSPENSION	1	2	3	OP	OPAL	S	STANDARD	DN	DOWNLIGHT
			4	5	6						
			7	8							
			CR	CONTINUOUS RUN							
			PAT	PATTERN							

CCT		LUMEN PACKAGE		VOLTAGE		DIMMING OPTIONS		FINISHES	
27	2700K	ST	STANDARD	UN	UNIVERSAL (120V - 277V)	OS1	0-10V DIMMING	01	BLACK
30	3000K	HI	HIGH	347	347V*	TRI	TRIAC	02	WHITE
35	3500K					TUN	TUNABLE WHITE*	AL	ALUMINUM
40	4000K					LUT	LUTRON*	CC	CUSTOM COLOR
50	5000K					DTW	DIM TO WARM*		SPECIFY RAL#

ORDERING GUIDE EXAMPLE:

Architectural Profiles F100 / Suspension / 2 ft. / Opal Lens / Standard Style / Downlight / 4000K / Standard / Universal Voltage / TRIAC Dimming / Black Finish

CODE: F100-SU-2-OP-S-DN-40-ST-UN-TRI-01

**LENGTHS CHART

1'	11.5"	2'	22.5"	3'	33.5"	4'	44.5"
5'	55.5"	6'	66.5"	7'	77.5"	8'	88.5"

MAXIMUM 8' PER CONTINUOUS PIECE

F100

F100 STANDARD SURFACE MOUNT



MODEL F100	F100-S-X-OP-S-DN
DIMENSIONS	100mm x 75mm
MOUNTING	Surface Mount
STYLE	Standard
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	1 - 8'/CR: Continuous Run/PAT: Pattern
LENS	Opal
LIGHT DIRECTION	Downlight
LUMEN PACKAGES	Standard: 7.5W, 813lm/ft. (3500K)/High: 10W, 1162lm/ft. (3500K)
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)
APPROVAL	Damp

ELECTRICAL
APPROVAL

COMPLIANT

WARRANTY



PATTERNS


Common Miter Cut Patterns

Square	Rectangular	U-Shape	L-Shape
X = 23" min. Y = 23" min.		X = 23" min. Y = 23" min. Z = 23" min.	X = 23" min. Y = 23" min.

Custom Patterns



All corners are miter cut and customizable to any degree.

Contact sales@eurofase.com

ORDERING GUIDE CONFIGURATOR

PROFILE	MOUNTING	LENGTHS (FT.) (**See Lengths Chart below)			LENS	STYLE	LIGHT DIRECTION	
F100	S SURFACE MOUNT	1	2	3	OP OPAL	S STANDARD	DN	DOWNLIGHT
		4	5	6				
		7	8					
		CR	CONTINUOUS RUN					
		PAT	PATTERN					

CCT	LUMEN PACKAGE	VOLTAGE	DIMMING OPTIONS	FINISHES
27 2700K	ST STANDARD	UN UNIVERSAL (120V - 277V)	OS1 0-10V DIMMING	01 BLACK
30 3000K	HI HIGH	347 347V*	TRI TRIAC	02 WHITE
35 3500K			TUN TUNABLE WHITE*	AL ALUMINUM
40 4000K			LUT LUTRON*	CUSTOM COLOR
50 5000K			DTW DIM TO WARM*	CC SPECIFY RAL#

**LENGTHS CHART

1' 11.5"	2' 22.5"	3' 33.5"	4' 44.5"
5' 55.5"	6' 66.5"	7' 77.5"	8' 88.5"

MAXIMUM 8' PER CONTINUOUS PIECE

ORDERING GUIDE EXAMPLE:

Architectural Profiles F100 / Surface Mount / 7 ft. / Opal Lens / Standard Style / Downlight / 3000K / Standard / Universal Voltage / TRIAC Dimming / White Finish

CODE: **F100-S-7-OP-S-DN-30-ST-UN-TRI-02**

ARCHITECTURAL PROFILES

F100

F100 ROUND SUSPENSION




MODEL F100	F100-SU-X-OP-RND-DN
DIMENSIONS	100mm x 75mm
MOUNTING	Suspension Mount, 72" Power Wire + Field Adjustable A/C Cable
STYLE	Standard
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	1 - 8' CR: Continuous Run/ PAT: Pattern
LENS	Opal
LIGHT DIRECTION	Downlight
LUMEN PACKAGES	Standard: 7.5W, 813lm/ft. (3500K)/ High: 10W, 1162lm/ft. (3500K)
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)
APPROVAL	Damp

ELECTRICAL
APPROVAL



COMPLIANT

WARRANTY

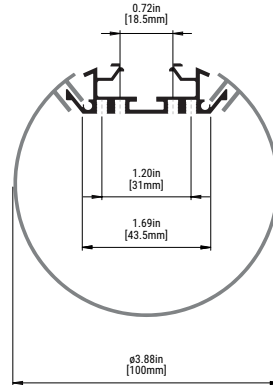

ORDERING GUIDE CONFIGURATOR

PROFILE	MOUNTING		LENGTHS (FT.) (*See Lengths Chart below)			LENS		STYLE		LIGHT DIRECTION	
F100	SU	SUSPENSION	1	2	3	OP	OPAL	RND	ROUND	DN	DOWNLIGHT
			4	5	6						
			7	8							
			CR	CONTINUOUS RUN							
			PAT	PATTERN							

CCT		LUMEN PACKAGE		VOLTAGE		DIMMING OPTIONS		FINISHES	
27	2700K	ST	STANDARD	UN	UNIVERSAL (120V - 277V)	OS1	0-10V DIMMING	01	BLACK
30	3000K	HI	HIGH	347	347V*	TRI	TRIAC	02	WHITE
35	3500K					TUN	TUNABLE WHITE*	AL	ALUMINUM
40	4000K					LUT	LUTRON*		CUSTOM COLOR
50	5000K					DTW	DIM TO WARM*	CC	SPECIFY RAL#

ORDERING GUIDE EXAMPLE:

Architectural Profiles F100 / Suspension / 6 ft. / Opal Lens / Round Style / Downlight / 3500K / Standard / Universal Voltage / 0-10V Dimming / Aluminum Finish

CODE: **F100-SU-6-OP-RND-DN-35-ST-UN-OS1-AL**

**LENGTHS CHART

1'	11.5"	2'	22.5"	3'	33.5"	4'	44.5"
5'	55.5"	6'	66.5"	7'	77.5"	8'	88.5"

MAXIMUM 8' PER CONTINUOUS PIECE




ARCHITECTURAL PROFILES

TECHNICAL SPECIFICATIONS

OS1	1% Dimming (0-10V)
TRI	TRIAC Dimmable LED Driver
TW	Tuneable White (1500K-6500K)
HL1	Lutron HI-LUME 1% 2-wire LED Driver
ES	Lutron Digital Ecosystem
5ES	5 Series Ecosystem; 5% Dimming
DTW	Dim To Warm

MODEL	Samsung Breakaway 44 inch
POWER CONSUMPTION	31W
LUMINOUS FLUX	Standard: 4185lm @ 3500K High: 4650lm @ 3500K
LUMINOUS EFFICACY	Standard: 135lm/W High: 150lm/W








WIRE FEED: SUSPENSION



1FT. PROFILE	
2FT. PROFILE	
3FT. PROFILE	
4FT. PROFILE	
5FT. PROFILE	
6FT. PROFILE	
7FT. PROFILE	
8FT. PROFILE	





ARCHITECTURAL PROFILES

WIRE FEED: SURFACE MOUNT

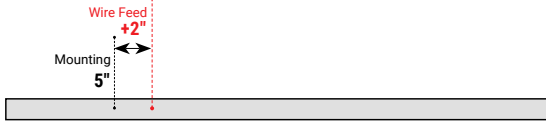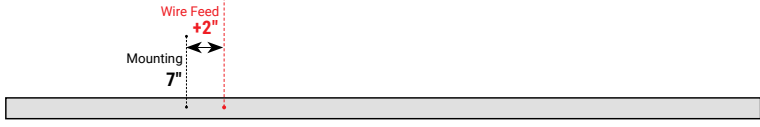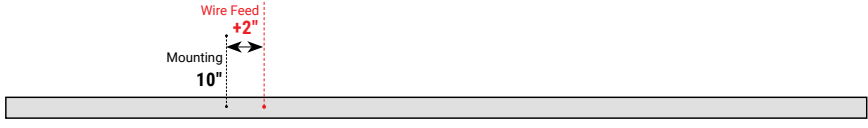
1FT. PROFILE		
2FT. PROFILE		
3FT. PROFILE		
4FT. PROFILE		
5FT. PROFILE		
6FT. PROFILE		
7FT. PROFILE		
8FT. PROFILE		

ARCHITECTURAL PROFILES


WIRE FEED: WALL MOUNT

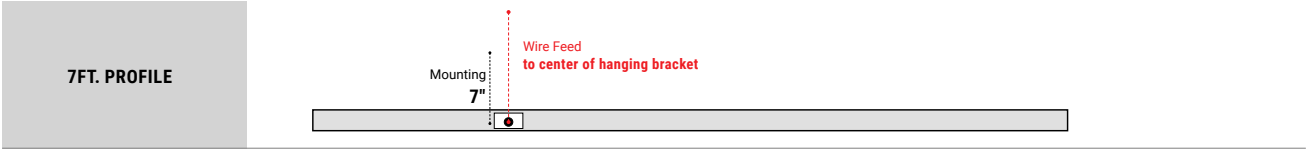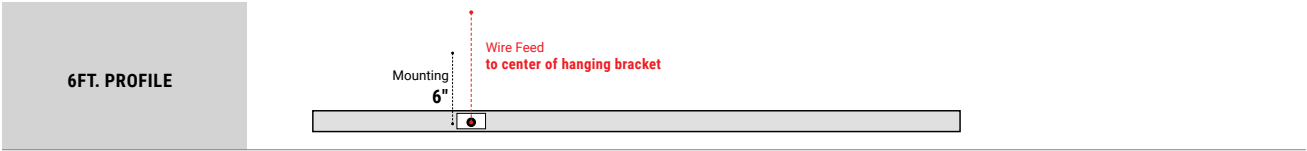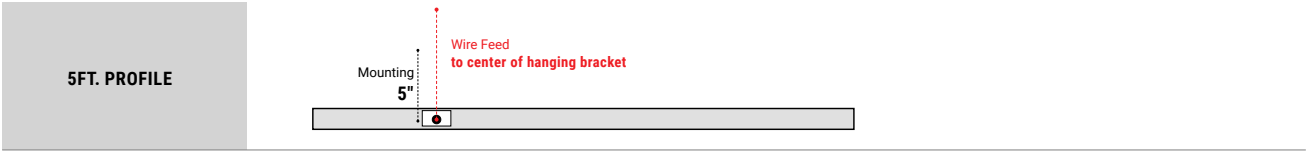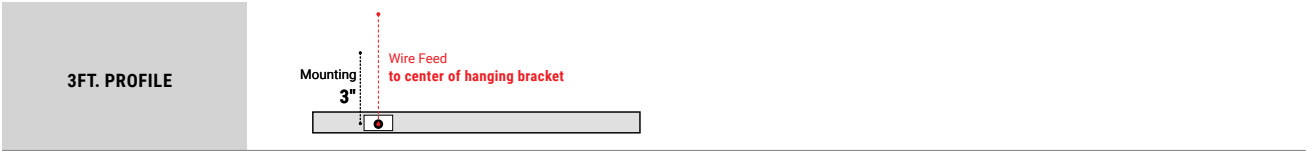

ETCH A SKETCH

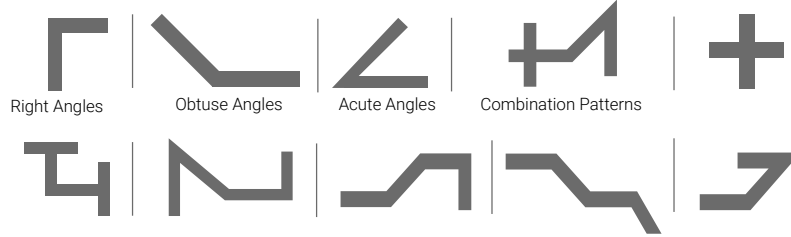

PATTERNS	
S - X	Square
R - XY	Rectangle
U - XYZ	U-Shape
L - XY	L-Shape
C	Custom Pattern
Standard Patterns Minimal Lengths Square X = 23" min. Y = 23" min. Rectangle X = 23" min. Y = 23" min. U-Shape X = 23" min. Y = 23" min. Z = 23" min. L-Shape X = 23" min. Y = 23" min.	
Custom Patterns "T" "X"	
Corner All corners are miter cut and customizable to any degree.	

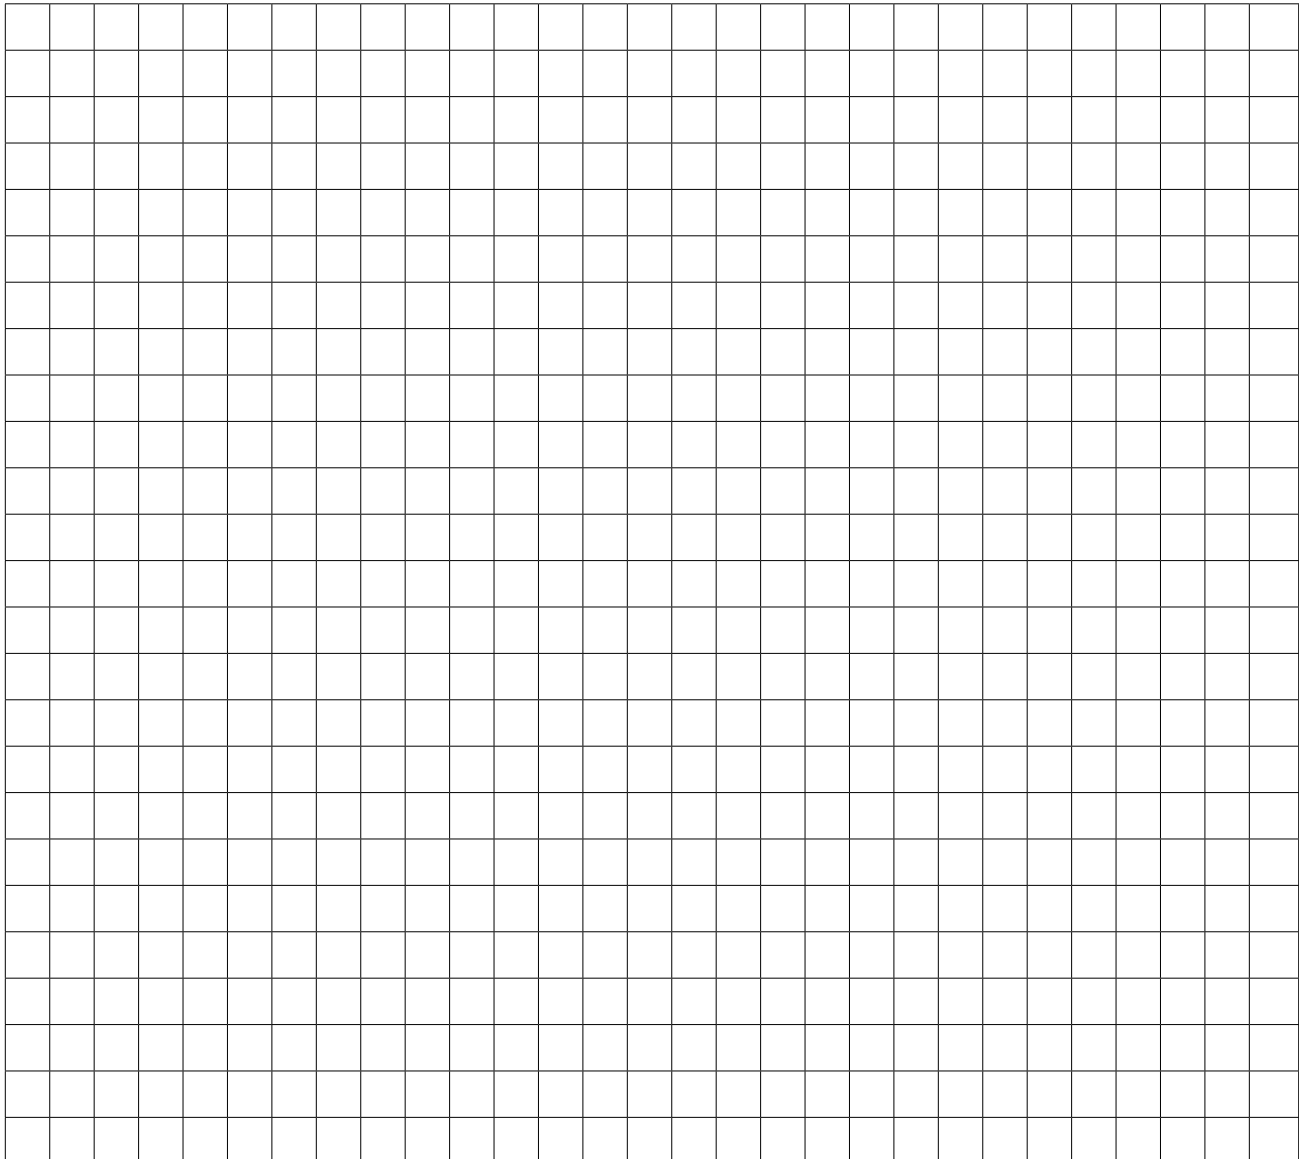

Fase¹

I N D E X

ITEM#	PAGE#	ITEM#	PAGE#	ITEM#	PAGE#
38656	118	30366-015	82	35759-02	153
38657	118	30530-010	16	35759-02	173
1002-01	113	30530-010	78	35763-01	165
1002-01	143	30530-026	16	35763-01	174
1002-02	113	30530-026	78	35763-02	165
1002-02	143	30531-017	18	35763-02	174
1004-01	113	30531-017	78	35764-01	165
1004-01	143	30531-021	18	35764-01	174
1004-02	113	30531-021	78	35764-02	165
1004-02	143	30532-014	78	35764-02	174
1008-01	113	30532-023	78	35765-01	157
1008-01	143	30534-018	16	35765-01	174
1008-02	113	30534-018	78	35765-02	157
1008-02	143	30535-015	18	35765-02	174
1510-01	144	30535-015	78	35766-01	151
1510-02	144	30536-012	78	35766-01	173
1530-01	113	35455-30-01	139	35766-02	151
1530-01	144	35455-30-02	139	35766-02	173
1530-02	113	35455-35-01	139	35767-01	144
1530-02	144	35455-35-02	139	35767-02	148
1540-01	144	35455-40-01	139	35768-01	148
1540-02	144	35455-40-02	139	35768-02	148
1550-01	144	35456-30-01	137	35769-01	148
1550-02	144	35456-30-02	137	35769-02	148
1560-01	113	35456-35-01	137	35771-01	150
1560-01	144	35456-35-02	137	35771-02	150
1560-02	113	35456-40-01	137	35772-01	150
1560-02	144	35456-40-02	137	35772-02	150
1570-01	144	35457-30-01	135	35773-01	150
1570-02	144	35457-30-02	135	35773-02	150
1615-01	144	35457-35-01	135	35775-01	149
1615-02	144	35457-35-02	135	35775-02	149
1617-01	113	35757-01	153	35776-01	149
1617-01	144	35757-01	173	35776-02	149
1617-02	113	35757-02	153	35777-01	149
1617-02	144	35757-02	173	35777-02	149
24051-019	82	35758-01	153	35779-01	149
24071-017	82	35758-01	173	35780-01	149
26290-01	185	35758-02	153	35781-01	150
30264-014	167	35758-02	173	35795-015	167
30264-014	170	35759-01	153	35796-015	148
30264-014	186	35759-01	173	35796-015	167

Fase¹

I N D E X

ITEM#	PAGE#	ITEM#	PAGE#	ITEM#	PAGE#
35796-02	148	36298-01	186	36374-02	173
35796-02	167	36299-01	186	36376-01	163
35797-012	148	36300-01	186	36376-01	174
35797-012	167	36300-01	190	36376-02	163
35799-02	167	36301-01	186	36376-02	174
35799-02	171	36301-01	190	36377-01	159
35800-02	167	36302-01	186	36377-01	173
35800-02	171	36302-01	190	36377-02	159
35814-01	148	36361-01	167	36377-02	173
36281-01	189	36361-02	167	36379-01	161
36281-01	190	36362-01	167	36379-01	174
36282-01	185	36362-01	169	36379-02	161
36283-01	185	36362-02	167	36379-02	174
36283-01	190	36363-01	167	36433-01	197
36284-01	185	36363-02	167	36434-01	197
36285-01	185	36364-01	167	36435-01	197
36285-01	189	36364-01	169	36436-01	198
36285-01	190	36364-01	169	36437-01	198
36286-01	185	36364-02	167	36438-01	198
36287-01	185	36368-01	167	36439-01	197
36288-01	185	36368-01	169	36440-01	198
36289-01	185	36368-01	169	36441-01	197
36289-01	189	36368-02	167	36441-01	198
36289-01	190	36369-01	167	36441-01	207
36290-01	189	36369-02	167	36442-013	197
36290-01	190	36370-01	167	36442-013	207
36291-01	185	36370-02	167	36443-017	198
36291-01	189	36371-01	167	36443-017	207
36291-01	190	36371-02	167	36444-019	197
36292-01	185	36372-01	155	36444-019	198
36293-01	185	36372-01	173	36444-019	207
36293-01	190	36372-02	155	36444-019	209
36293-01	190	36372-02	173	36444-019	210
36294-01	186	36373-01	155	36445-017	207
36294-01	189	36373-01	173	36445-017	214
36294-01	190	36373-01	179	36446-014	207
36296-01	186	36373-02	155	36446-014	214
36296-01	189	36373-02	173	36448-01	197
36296-01	189	36374-01	155	36448-01	207
36296-01	190	36374-01	173	36448-01	213
36297-01	186	36374-01	179	36449-012	207
36297-01	190	36374-02	155	36449-012	214

Fase¹

I N D E X

ITEM#	PAGE#	ITEM#	PAGE#	ITEM#	PAGE#
36450-01	197	36512-01	191	38141-010	222
36450-01	207	36513-01	191	38141-010	222
36451-01	205	36517-01	183	38141-010	223
36451-01	216	36517-01	192	38141-010	223
36452-01	205	36520-01	181	38141-010	228
36452-01	216	36520-01	190	38141-010	228
36453-01	205	36520-01	192	38141-010	230
36453-01	216	36702-01	148	38141-010	233
36454-01	205	36703-01	203	38142-017	222
36454-01	216	36703-01	215	38142-017	223
36455-01	205	36704-01	205	38142-017	228
36455-01	216	36704-01	216	38142-017	230
36456-01	201	36734-01	150	38142-017	232
36456-01	216	36735-01	186	38142-017	233
36457-01	201	36736-01	186	38204-012	222
36457-01	216	36833-016	197	38204-012	223
36458-01	199	36833-016	198	38204-012	228
36458-01	215	36833-016	207	38204-012	229
36459-01	199	36833-016	209	38204-012	234
36459-01	215	36834-013	207	38205-019	222
36460-01	199	36834-013	210	38205-019	223
36460-01	215	36878-01	203	38205-019	228
36461-01	199	36878-01	215	38205-019	229
36461-01	215	36902-019	197	38205-019	232
36462-01	203	36902-019	198	38205-019	234
36462-01	215	36902-019	207	38653-01	113
36463-01	203	38131-011	227	38653-02	113
36463-01	215	38131-011	228	38656-27-4-01	115
36464-01	203	38132-018	227	38656-27-4-02	115
36464-01	215	38132-018	228	38656-30-4-01	115
36465-01	203	38133-015	227	38656-30-4-02	115
36465-01	215	38133-015	228	38656-35-4-01	115
36498-01	177	38134-012	221	38656-35-4-02	115
36498-01	191	38134-012	222	38656-40-4-01	115
36499-01	177	38135-019	221	38656-40-4-02	115
36499-01	190	38135-019	222	38657-30-4-01	116
36499-01	191	38136-016	221	38657-30-4-02	116
36500-01	177	38136-016	222	38657-35-4-01	116
36500-01	185	38138-010	223	38657-35-4-02	116
36500-01	189	38140-013	230	38657-40-4-01	116
36500-01	191	38140-013	232	38657-40-4-02	116
36501-01	185	38140-013	233	39713-30-01	125

Fase¹

I N D E X

ITEM#	PAGE#	ITEM#	PAGE#	ITEM#	PAGE#
39713-30-02	125	44838-010	80	BVO-R-2-T-02-RGRG	37
39713-35-01	125	44839-017	80	BVO-R-2-T-02-SGSG	39
39713-35-02	125	44839-024	80	BVO-R-2-T-02-STST	43
39713-40-01	125	44912-017	167	BVO-R-2-T-02-SUSU	41
39713-40-02	125	44912-017	170	BVO-R-2-T-02-WLWL	45
39714-30-01	127	BVO-R-1-T-01-PN	47	BVO-R-2-TL-01-PNPN	47
39714-30-02	127	BVO-R-1-T-01-RF	35	BVO-R-2-TL-01-RFRF	35
39714-35-01	127	BVO-R-1-T-01-RG	37	BVO-R-2-TL-01-RGRG	37
39714-35-02	127	BVO-R-1-T-01-SG	39	BVO-R-2-TL-01-SGSG	39
39714-40-01	127	BVO-R-1-T-01-ST	43	BVO-R-2-TL-01-STST	43
39714-40-02	127	BVO-R-1-T-01-SU	41	BVO-R-2-TL-01-SUSU	41
39757-01-018	125	BVO-R-1-T-01-WL	45	BVO-R-2-TL-01-WLWL	45
39757-01-018	127	BVO-R-1-T-02-PN	47	BVO-R-2-TL-02-PNPN	47
41900-01	113	BVO-R-1-T-02-RF	35	BVO-R-2-TL-02-RFRF	35
41900-02	113	BVO-R-1-T-02-RG	37	BVO-R-2-TL-02-RGRG	37
41949-016	20	BVO-R-1-T-02-SG	39	BVO-R-2-TL-02-SGSG	39
41950-012	20	BVO-R-1-T-02-ST	43	BVO-R-2-TL-02-STST	43
41951-019	20	BVO-R-1-T-02-SU	41	BVO-R-2-TL-02-SUSU	41
41952-016	22	BVO-R-1-T-02-WL	45	BVO-R-2-TL-02-WLWL	45
41953-013	22	BVO-R-1-TL-01-PN	47	BVO-R-3-T-01-PNPNPN	47
41954-010	22	BVO-R-1-TL-01-RF	35	BVO-R-3-T-01-RFRFRF	35
43668-014	22	BVO-R-1-TL-01-RG	37	BVO-R-3-T-01-RGRGRG	37
43669-011	22	BVO-R-1-TL-01-SG	39	BVO-R-3-T-01-SGSGSG	39
43670-017	22	BVO-R-1-TL-01-ST	43	BVO-R-3-T-01-STSTST	43
43784-011	78	BVO-R-1-TL-01-SU	41	BVO-R-3-T-01-SUSUSU	41
43786-015	80	BVO-R-1-TL-01-WL	45	BVO-R-3-T-01-WLWLWL	45
43788-019	82	BVO-R-1-TL-02-PN	47	BVO-R-3-T-02-PNPNPN	47
44299-019	52	BVO-R-1-TL-02-RF	35	BVO-R-3-T-02-RFRFRF	35
44300-012	80	BVO-R-1-TL-02-RG	37	BVO-R-3-T-02-RGRGRG	37
44300-026	80	BVO-R-1-TL-02-SG	39	BVO-R-3-T-02-SGSGSG	39
44302-016	82	BVO-R-1-TL-02-ST	43	BVO-R-3-T-02-STSTST	43
44302-021	82	BVO-R-1-TL-02-SU	41	BVO-R-3-T-02-SUSUSU	41
44360-016	52	BVO-R-1-TL-02-WL	45	BVO-R-3-T-02-WLWLWL	45
44361-013	54	BVO-R-2-T-01-PNPN	47	BVO-R-3-TL-01-PNPNPN	47
44362-010	56	BVO-R-2-T-01-RFRF	35	BVO-R-3-TL-01-RFRFRF	35
44363-017	54	BVO-R-2-T-01-RGRG	37	BVO-R-3-TL-01-RGRGRG	37
44364-014	54	BVO-R-2-T-01-SGSG	39	BVO-R-3-TL-01-SGSGSG	39
44365-011	56	BVO-R-2-T-01-STST	43	BVO-R-3-TL-01-STSTST	43
44366-018	56	BVO-R-2-T-01-SUSU	41	BVO-R-3-TL-01-SUSUSU	41
44367-015	52	BVO-R-2-T-01-WLWL	45	BVO-R-3-TL-01-WLWLWL	45
44837-013	78	BVO-R-2-T-02-PNPN	47	BVO-R-3-TL-02-PNPNPN	47
44837-020	78	BVO-R-2-T-02-RFRF	35	BVO-R-3-TL-02-RFRFRF	35

Fase¹

I N D E X

ITEM#	PAGE#	ITEM#	PAGE#	ITEM#	PAGE#
BVO-R-3-TL-02-RGRGRG	37	F100-S-X-OP-S-DN	266	OSC-4-R-T-01-WL	73
BVO-R-3-TL-02-SGSGSG	39	F100-SU-X-OP-RND-DN	267	OSC-4-R-T-02-RF	71
BVO-R-3-TL-02-STSTST	43	F38-R-X-OP-S-DN	246	OSC-4-R-T-02-RG	73
BVO-R-3-TL-02-SUSUSU	41	F38-SU-X-OP-S-DN	245	OSC-4-R-T-02-WL	73
BVO-R-3-TL-02-WLWLWL	45	F38-SU-X-OP-S-UD	244	OSC-4-R-TL-01-RF	71
BVO-S-1-01-PN	47	F38-W-X-OP-S-UD	243	OSC-4-R-TL-01-RG	73
BVO-S-1-01-RF	35	F50-S-X-OP-S-DN	249	OSC-4-R-TL-01-WL	73
BVO-S-1-01-RG	37	F50-SU-X-OP-S-DN	250	OSC-4-R-TL-02-RF	71
BVO-S-1-01-SG	39	F50-SU-X-OP-RA-DN	251	OSC-4-R-TL-02-RG	73
BVO-S-1-01-ST	43	F50-SU-X-OP-S-UD	253	OSC-4-R-TL-02-WL	73
BVO-S-1-01-SU	41	F50-W-X-OP-S-UD	254	OSC-4-S-T-01-RF	71
BVO-S-1-02-PN	47	F50-R-X-OP-S-DN	255	OSC-4-S-T-01-RG	73
BVO-S-1-02-RF	35	F50-SU-X-OP-RA-DN	256	OSC-4-S-T-01-WL	73
BVO-S-1-02-RG	37	F75-SU-X-OP-S-DN	259	OSC-4-S-T-02-RF	71
BVO-S-1-02-SG	39	F75-S-X-OP-S-DN	260	OSC-4-S-T-02-RG	73
BVO-S-1-02-ST	43	F75-R-X-OP-S-DN	261	OSC-4-S-T-02-WL	73
BVO-S-1-02-SU	41	OSC-3-R-T-01-RF	71	OSC-4-S-TL-01-RF	71
BVO-S-2-01-PNPN	47	OSC-3-R-T-01-RG	73	OSC-4-S-TL-01-RG	73
BVO-S-2-01-RFRF	35	OSC-3-R-T-01-WL	73	OSC-4-S-TL-01-WL	73
BVO-S-2-01-RGRG	37	OSC-3-R-T-02-RF	71	OSC-4-S-TL-02-RF	71
BVO-S-2-01-SGSG	39	OSC-3-R-T-02-RG	73	OSC-4-S-TL-02-RG	73
BVO-S-2-01-STST	43	OSC-3-R-T-02-WL	73	OSC-4-S-TL-02-WL	73
BVO-S-2-01-SUSU	41	OSC-3-R-TL-01-RF	71	OSC-5-R-T-01-RF	71
BVO-S-2-02-PNPN	47	OSC-3-R-TL-01-RG	73	OSC-5-R-T-01-RG	73
BVO-S-2-02-RFRF	35	OSC-3-R-TL-01-WL	73	OSC-5-R-T-01-WL	73
BVO-S-2-02-RGRG	37	OSC-3-R-TL-02-RF	71	OSC-5-R-T-02-RF	71
BVO-S-2-02-SGSG	39	OSC-3-R-TL-02-RG	73	OSC-5-R-T-02-RG	73
BVO-S-2-02-STST	43	OSC-3-R-TL-02-WL	73	OSC-5-R-T-02-WL	73
BVO-S-2-02-SUSU	41	OSC-3-S-T-01-RF	71	OSC-5-R-TL-01-RF	71
BVO-S-3-01-PNPNPN	47	OSC-3-S-T-01-RG	73	OSC-5-R-TL-01-RG	73
BVO-S-3-01-RFRFRF	35	OSC-3-S-T-01-WL	73	OSC-5-R-TL-01-WL	73
BVO-S-3-01-RGRGRG	37	OSC-3-S-T-02-RF	71	OSC-5-R-TL-02-RF	71
BVO-S-3-01-SGSGSG	39	OSC-3-S-T-02-RG	73	OSC-5-R-TL-02-RG	73
BVO-S-3-01-STSTST	43	OSC-3-S-T-02-WL	73	OSC-5-R-TL-02-WL	73
BVO-S-3-01-SUSUSU	41	OSC-3-S-TL-01-RF	71	OSC-5-S-T-01-RF	71
BVO-S-3-02-PNPNPN	47	OSC-3-S-TL-01-RG	73	OSC-5-S-T-01-RG	73
BVO-S-3-02-RFRFRF	35	OSC-3-S-TL-01-WL	73	OSC-5-S-T-01-WL	73
BVO-S-3-02-RGRGRG	37	OSC-3-S-TL-02-RF	71	OSC-5-S-T-02-RF	71
BVO-S-3-02-SGSGSG	39	OSC-3-S-TL-02-RG	73	OSC-5-S-T-02-RG	73
BVO-S-3-02-STSTST	43	OSC-3-S-TL-02-WL	73	OSC-5-S-T-02-WL	73
BVO-S-3-02-SUSUSU	41	OSC-4-R-T-01-RF	71	OSC-5-S-TL-01-RF	71
F100-SU-X-OP-S-DN	265	OSC-4-R-T-01-RG	73	OSC-5-S-TL-01-RG	73

Fase¹

I N D E X

ITEM#	PAGE#	ITEM#	PAGE#	ITEM#	PAGE#
OSC-5-S-TL-01-WL	73	TGO-1S-TL-02-ST	9	WHS-S-01-BR10	95
OSC-5-S-TL-02-RF	71	TGO-1S-TL-02-SU	11	WHS-S-01-BR18	95
OSC-5-S-TL-02-RG	73	TGO-2S-T-01-PD	13	WHS-S-01-BR6	95
OSC-5-S-TL-02-WL	73	TGO-2S-T-01-RF	5	WHS-S-01-SL13	95
TGO-1R-T-01-PD	13	TGO-2S-T-01-RG	7	WHS-S-01-SL18	95
TGO-1R-T-01-RF	5	TGO-2S-T-01-ST	9	WHS-S-01-SL8	95
TGO-1R-T-01-RG	7	TGO-2S-T-01-SU	11	WHS-S-02-BR10	95
TGO-1R-T-01-ST	9	TGO-2S-T-02-PD	13	WHS-S-02-BR18	95
TGO-1R-T-01-SU	11	TGO-2S-T-02-RF	5	WHS-S-02-BR6	95
TGO-1R-T-02-PD	13	TGO-2S-T-02-RG	7	WHS-S-02-SL13	95
TGO-1R-T-02-RF	5	TGO-2S-T-02-ST	9	WHS-S-02-SL18	95
TGO-1R-T-02-RG	7	TGO-2S-T-02-SU	11	WHS-S-02-SL8	95
TGO-1R-T-02-ST	9	TGO-2S-TL-01-PD	13	WHS-SU-01-BR10	97
TGO-1R-T-02-SU	11	TGO-2S-TL-01-RF	5	WHS-SU-01-BR18	97
TGO-1R-TL-01-PD	13	TGO-2S-TL-01-RG	7	WHS-SU-01-BR6	97
TGO-1R-TL-01-RF	5	TGO-2S-TL-01-ST	9	WHS-SU-01-SL13	97
TGO-1R-TL-01-RG	7	TGO-2S-TL-01-SU	11	WHS-SU-01-SL18	97
TGO-1R-TL-01-ST	9	TGO-2S-TL-02-PD	13	WHS-SU-01-SL8	97
TGO-1R-TL-01-SU	11	TGO-2S-TL-02-RF	5	WHS-SU-02-BR10	97
TGO-1R-TL-02-PD	13	TGO-2S-TL-02-RG	7	WHS-SU-02-BR18	97
TGO-1R-TL-02-RF	5	TGO-2S-TL-02-ST	9	WHS-SU-02-BR6	97
TGO-1R-TL-02-RG	7	TGO-2S-TL-02-SU	11	WHS-SU-02-SL13	97
TGO-1R-TL-02-ST	9	TGO-3S-T-01-PD	13	WHS-SU-02-SL18	97
TGO-1R-TL-02-SU	11	TGO-3S-T-01-RF	5	WHS-SU-02-SL8	97
TGO-1S-T-01-PD	13	TGO-3S-T-01-RG	7	WHS-W-01-BR10	99
TGO-1S-T-01-RF	5	TGO-3S-T-01-ST	9	WHS-W-01-BR18	99
TGO-1S-T-01-RG	7	TGO-3S-T-01-SU	11	WHS-W-01-BR6	99
TGO-1S-T-01-ST	9	TGO-3S-T-02-PD	13	WHS-W-01-SL13	99
TGO-1S-T-01-SU	11	TGO-3S-T-02-RF	5	WHS-W-01-SL18	99
TGO-1S-T-02-PD	13	TGO-3S-T-02-RG	7	WHS-W-01-SL8	99
TGO-1S-T-02-RF	5	TGO-3S-T-02-ST	9	WHS-W-02-BR10	99
TGO-1S-T-02-RG	7	TGO-3S-T-02-SU	11	WHS-W-02-BR18	99
TGO-1S-T-02-ST	9	TGO-3S-TL-01-PD	13	WHS-W-02-BR6	99
TGO-1S-T-02-SU	11	TGO-3S-TL-01-RF	5	WHS-W-02-SL13	99
TGO-1S-TL-01-PD	13	TGO-3S-TL-01-RG	7	WHS-W-02-SL18	99
TGO-1S-TL-01-RF	5	TGO-3S-TL-01-ST	9	WHS-W-02-SL8	99
TGO-1S-TL-01-RG	7	TGO-3S-TL-01-SU	11		
TGO-1S-TL-01-ST	9	TGO-3S-TL-02-PD	13		
TGO-1S-TL-01-SU	11	TGO-3S-TL-02-RF	5		
TGO-1S-TL-02-PD	13	TGO-3S-TL-02-RG	7		
TGO-1S-TL-02-RF	5	TGO-3S-TL-02-ST	9		
TGO-1S-TL-02-RG	7	TGO-3S-TL-02-SU	11		

Fase¹_{TM}

NOTES



Fase¹ + Function.[™]

BY EUROFASE

33 West Beaver Creek Road,
Richmond Hill, Ontario L4B 1L8
Canada

Tel: 905.695.2055 **Toll Free:** 1.800.660.5391

Fax: 905.695.2056 **Toll Free:** 1.800.660.5390

www.fase1lighting.com | www.eurofase.com

Dallas Trade Mart:
Eurofase Showroom, Suite #4002

MKT-CAT-F1FN22



Product Specifications and Approvals

Eurofase Inc. reserves the right to make alterations to the construction and design of products shown in this catalog in order to meet the laws or regulations of any authorized governing organization. The use of products shown in this catalog must comply with local building codes.

Printed in Canada © 2022 Eurofase Inc. All rights reserved.